

COLFAX MEDIUM LINEAR CHANDELIER  
SLC1022

General Product Information



ETL  
US  
Intertek



SAVE THESE  
INSTRUCTIONS!



STANDARD  
INSTALLATION



INDOOR



NEC COMPLIANT  
JUNCTION BOX



DAMP LOCATION  
SAFE



BULB(S)  
(NOT INCLUDED)



CONVERTS TO LED



ADAPTABLE TO  
SLOPED CEILINGS



PLEASE SEE  
[visualcomfort.com](http://visualcomfort.com)  
FOR PRODUCT  
SPECS



CLEAN WITH SOFT,  
DRY CLOTH ONLY. NO  
HARSH CHEMICALS!



BEST PRACTICE:  
HANDLE FIXTURE  
WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD  
SCREWDRIVER



WIRE CUTTER



PENCIL/MARKER

Safety Information


CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.  
Install and use this product in adherence with local electrical codes and regulations.

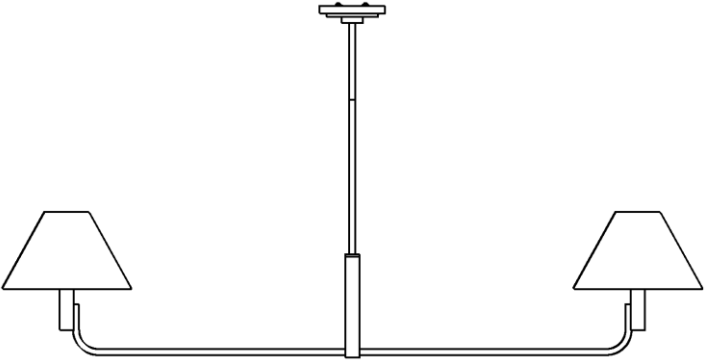

## FIXTURE PARTS

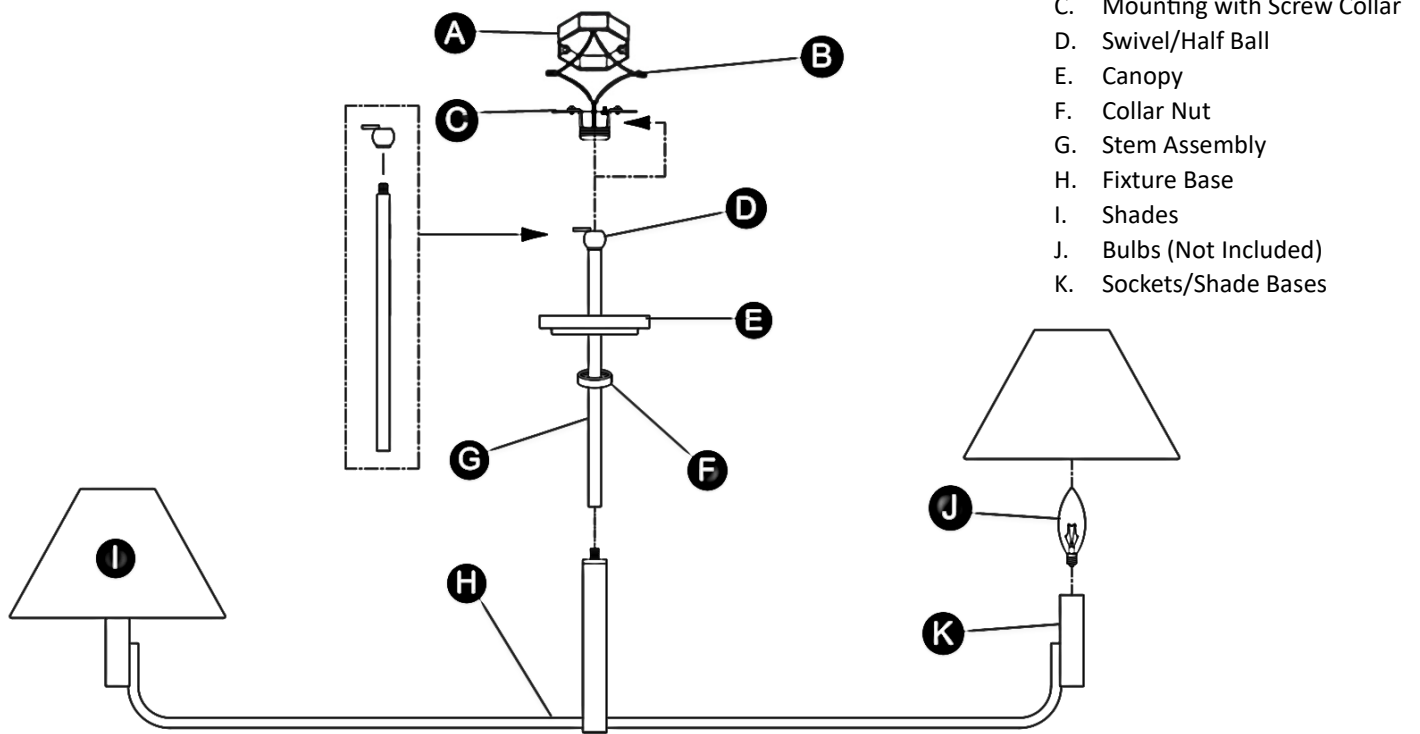

## INSTRUCTIONS

### I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
3. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball.
4. Screw the half ball onto the stem assembly. Then screw the stem assembly on top of the fixture.
5. Secure the mounting plate to the junction box using the mounting screws.
6. Slide the half ball into the screw collar portion of the mounting plate.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white, textured/ribbed) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto the mounting plate.

### III. Installing the Fixture

1. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.
2. Complete the installation by installing the shades onto the bulbs.