


BERGEN LARGE & X-LARGE CHANDELIERS

TFC1123; TFC1114



General Product Information

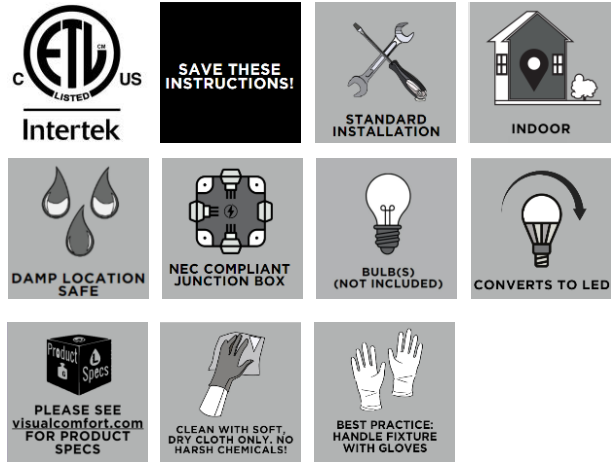


Tools Required



Safety Information

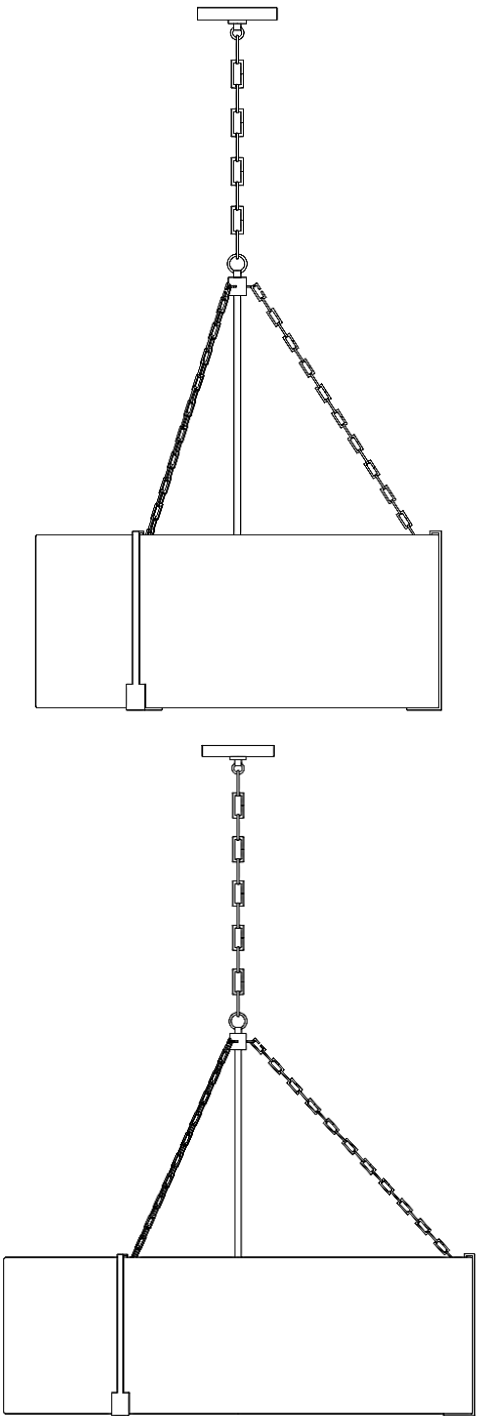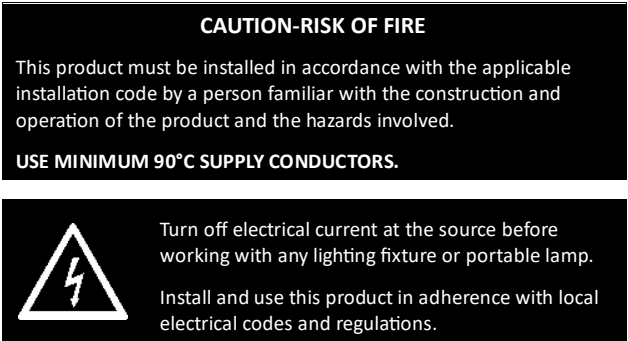

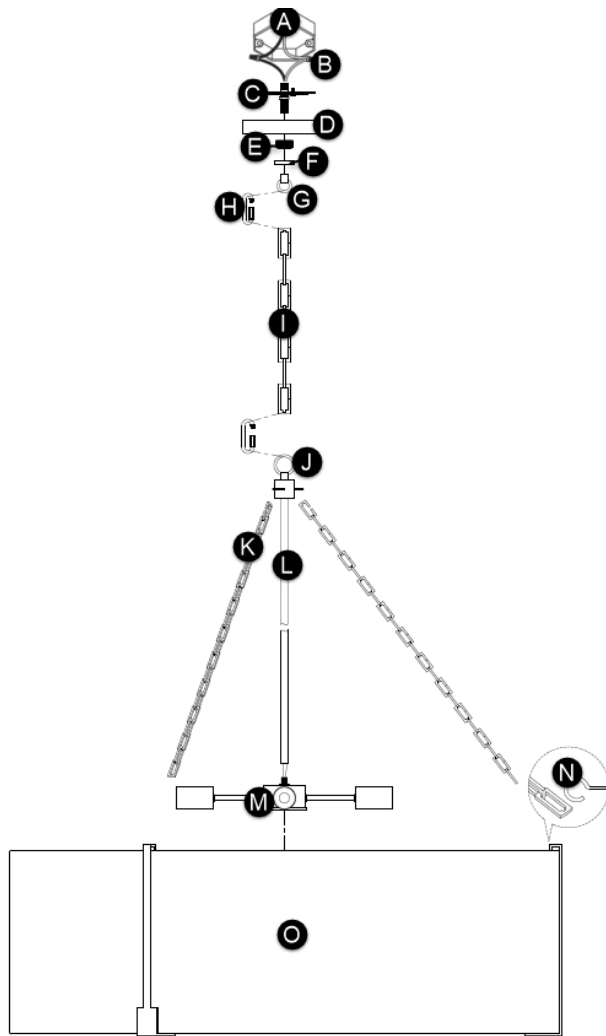

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar & Mounting Screws (Not Illustrated)
- D. Canopy
- E. Screw Collar
- F. Collar Nut
- G. Canopy Loop
- H. Quick Links
- I. Chain
- J. Fixture Loop
- K. Hang Chains
- L. Stem Assembly
- M. Sockets
- N. Frame Hooks
- O. Fixture
- P. Bulbs (Not Illustrated; Not Included)

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting bar to the junction box with the mounting screws.
2. Thread the fixture wires through the stem assembly if necessary and screw the stem assembly onto the socket assembly.
3. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
  - a) Remove a portion of the chain by opening a link with pliers.
  - b) Install the bottom end of the chain onto the fixture loop using the lower quick link.
  - c) Unscrew the collar nut and install it onto the chain.
  - d) Then slide the canopy onto the chain carefully and install the upper quick link onto the remaining end of chain.
  - e) Secure the quick link onto the canopy loop.
4. Weave the fixture wires through the chain, collar nut and canopy. Then feed the wires through the canopy loop, screw collar, and mounting plate.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot (black, smooth) fixture wire to hot power line wire
  - b) Neutral (white, textured) fixture wire to neutral power line wire
5. Carefully tuck all the wires behind the mounting bar into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto it.
2. Screw the bulbs into the sockets. Refer to the label on the sockets for max wattage information.
3. Install the hang chains onto the loops on the top of the stem assembly. Then lift the shade and attach the other end of the hang chains to the shade hooks to complete the installation.