

ELSAY MEDIUM & LARGE CHANDELIERS




DJC1246; DJC1255

General Product Information

 Intertek	 SAVE THESE INSTRUCTIONS!	 STANDARD INSTALLATION	 INDOOR
 NEC COMPLIANT JUNCTION BOX	 DAMP LOCATION SAFE	 BULB(S) (NOT INCLUDED)	 CONVERTS TO LED
 ADAPTABLE TO SLOPED CEILINGS	 PLEASE SEE visualcomfort.com FOR PRODUCT SPECS	 CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!	 BEST PRACTICE: HANDLE FIXTURE WITH GLOVES

 Product Warranty	 FCC Statement
---	--

Suggested/Required Tools

 ELECTRIC DRILL	 PHILLIPS-HEAD SCREWDRIVER	 WIRE CUTTER	 PENCIL/MARKER
---	--	--	--

Safety Information


CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.

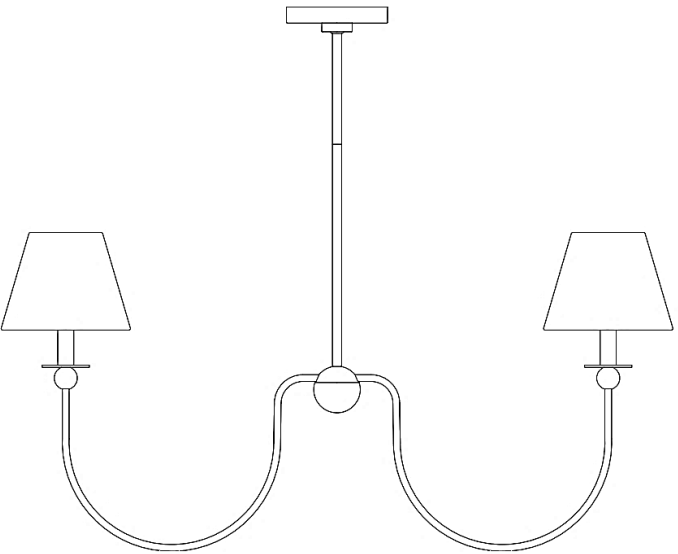

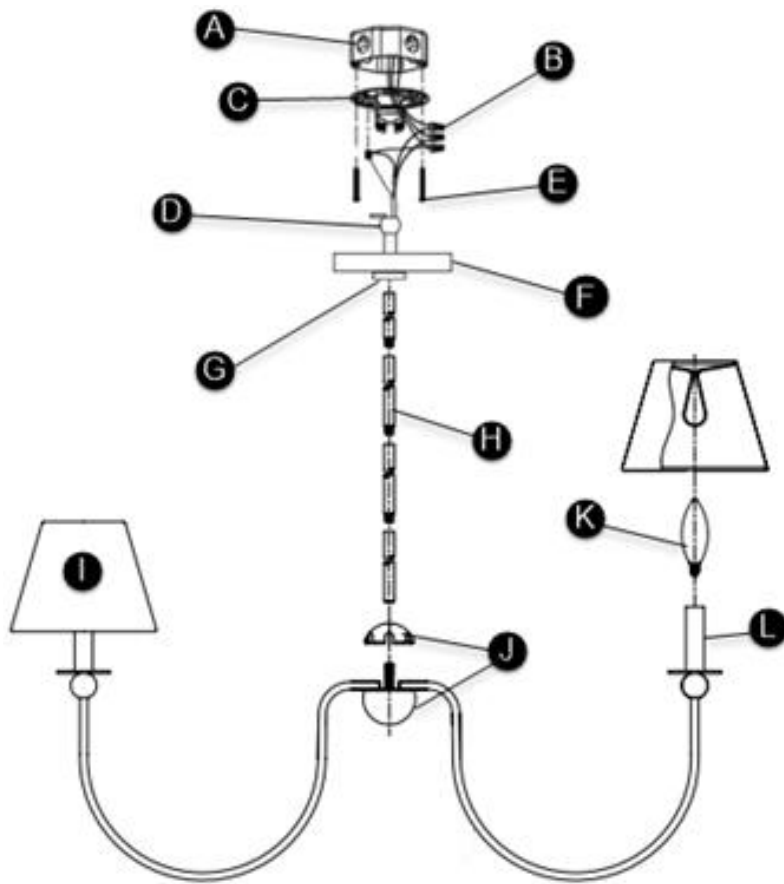

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collar
- D. Half Ball
- E. Mounting Screws
- F. Canopy
- G. Collar Nut
- H. Stem Assembly
- I. Shades
- J. Hub Cover and Housing
- K. Bulbs (Not Included)
- L. Sockets/Shade Bases
- M. Fixture Arms

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Spread the fixture arms evenly and install the hub cover and housing onto the fixture.
3. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
4. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball.
5. Screw the half ball onto the stem assembly. Then screw the stem assembly on top of the fixture.
6. Secure the mounting plate to the junction box using the mounting screws.
7. Slide the half ball into the screw collar portion of the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black) fixture wire to hot power line wire
 - b) Neutral (white) fixture wire to neutral power line wire
5. Carefully tuck all the wires behind the hanging plate into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.
3. Complete the installation by installing the shades onto the bulbs.