


HIKARI MEDIUM, LARGE, & WIDE LANTERNS

EP1463; EP1475; EP1485


General Product Information




Intertek




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




LAMP(S) (NOT INCLUDED)




CONVERTS TO LED




PLEASE SEE [visualcomfort.com](http://visualcomfort.com) FOR PRODUCT SPECS




CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



PLIERS

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

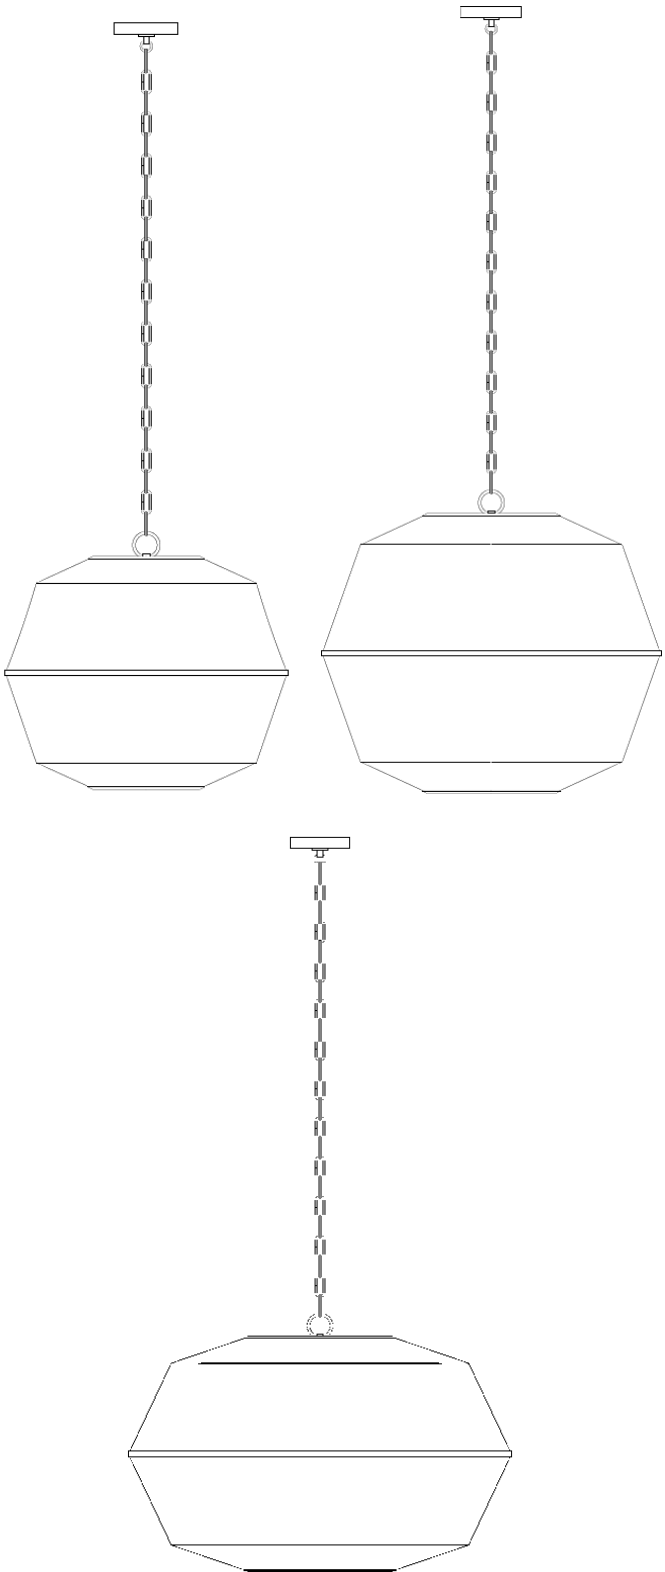

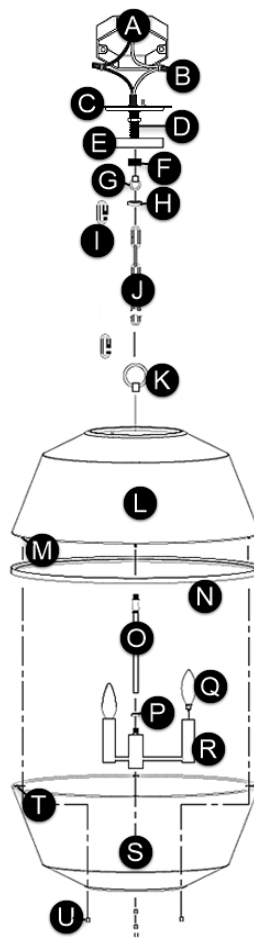

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar & Mounting Screws (Not Illustrated)
- D. Threaded Nipple
- E. Canopy
- F. Screw Collar
- G. Canopy Loop
- H. Collar Nut
- I. Quick Links
- J. Chain
- K. Fixture Loop
- L. Top Shade
- M. Shade Bolts (x4)
- N. Fixture Ring
- O. Center Stem and Swivel
- P. Spacer
- Q. Bulbs
- R. Sockets
- S. Bottom Shade
- T. Shade Holes
- U. Cap Nuts

## INSTRUCTIONS

### I. Preparing the Fixture

1. If necessary, screw the short end of the threaded nipple tightly onto the mounting bar, then screw the screw collar onto the threaded nipple.
2. Secure the mounting bar to the junction box with the mounting screws.
3. Feed the fixture wires through the stem, then screw the stem onto the top of the fixture.
4. Feed the fixture wires through the fixture loop, then slide the top shade on the stem and secure it with the fixture loop by screwing it onto the top of the stem.
5. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
  - a) Remove a portion of the chain by opening a link with pliers.
  - b) Install the bottom end of chain onto the fixture loop using the quick link.
  - c) Unscrew the collar nut from the screw collar and slide it onto the chain gently.
  - d) Then slide the canopy onto the chain gently.
  - e) Install the remaining end of the chain onto the canopy loop using the quick link.
6. Weave the cord through the chain, collar nut, and canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot (black/smooth) fixture wire to hot power line wire
  - b) Neutral (white/textured, ribbed) fixture wire to neutral power line wire
5. Carefully tuck all the wires behind the mounting bar into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the bulbs into the sockets. Refer to the label on the sockets for max wattage information.
3. Place the fixture ring on the bottom shade and line them up with the top shade. Align the screw holes in the top and bottom shades and secure them together with the shade bolts and cap nuts.