


VELERO LARGE LINEAR CHANDELIER

KC1151

General Product Information



Suggested/Required Tools

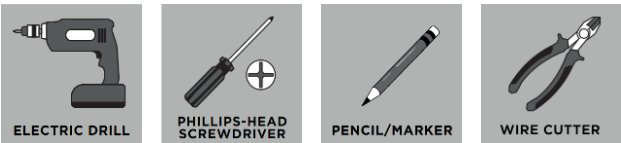

Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

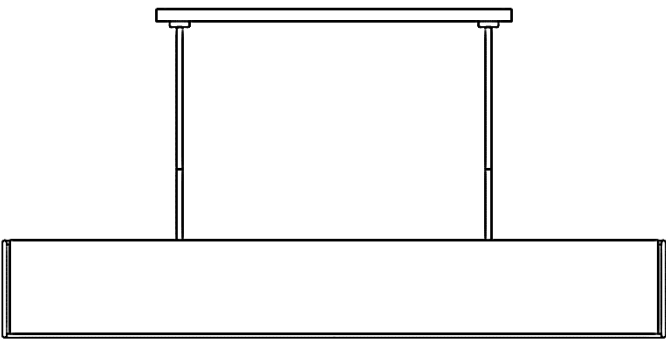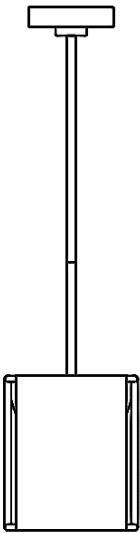

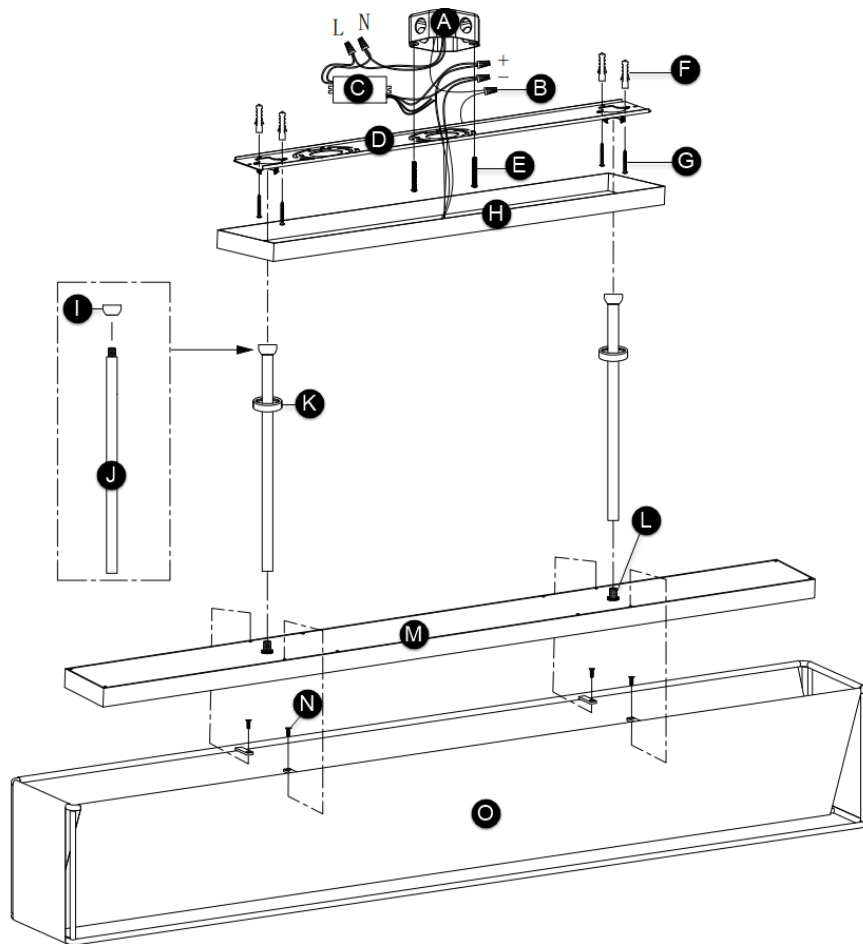

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collars
- E. Mounting Screws
- F. Anchors
- G. Anchor Screws
- H. Canopy
- I. Half Balls
- J. Stem Assemblies
- K. Collar Nut
- L. Fixture Nipples
- M. Fixture
- N. Fixture Screws
- O. Fixture Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into.
3. Determine the desired fixture height and complete the stem assemblies to suit by screwing the stems together. Ensure that both completed stems are equal in length.
4. Feed the fixture wires through one of the assembled stems and screw it to the fixture nipple on top of the fixture.
5. Screw the remaining assembled stem to the other fixture nipple.
6. Slide a collar nut (thread side up) onto each stem followed by the canopy.
7. Screw a half ball onto the top of each stem.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire to neutral power line wire
 - b) Hot driver wire to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collars to the junction box using the mounting screws.
4. Lift the assembled fixture up and slide the half balls onto the screw collar portions of the canopy. It is best to have a second person assist with this installation.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative driver wire to negative fixture wire
 - b) Positive driver wire to positive fixture wire
7. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
8. Carefully tuck all the wires behind the mounting plate into the junction box.
9. Place the canopy onto the mounting plate with screw collars and secure it in place by screwing the collar nuts tightly onto it.
10. Attach the shade to the fixture using the fixture screws.