


KENNEWICK MEDIUM PENDANT

DJO1102


General Product Information

Please visit [www.visualcomfort.com](http://www.visualcomfort.com) for product specs.




Intertek


SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




BULB(S) (NOT INCLUDED)




CONVERTS TO LED



ADAPTABLE TO SLOPED CEILINGS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



MEASURING TAPE

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

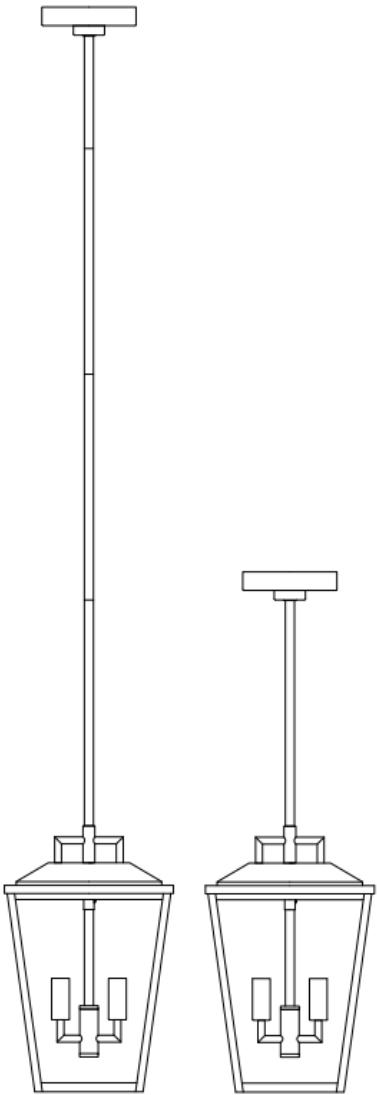

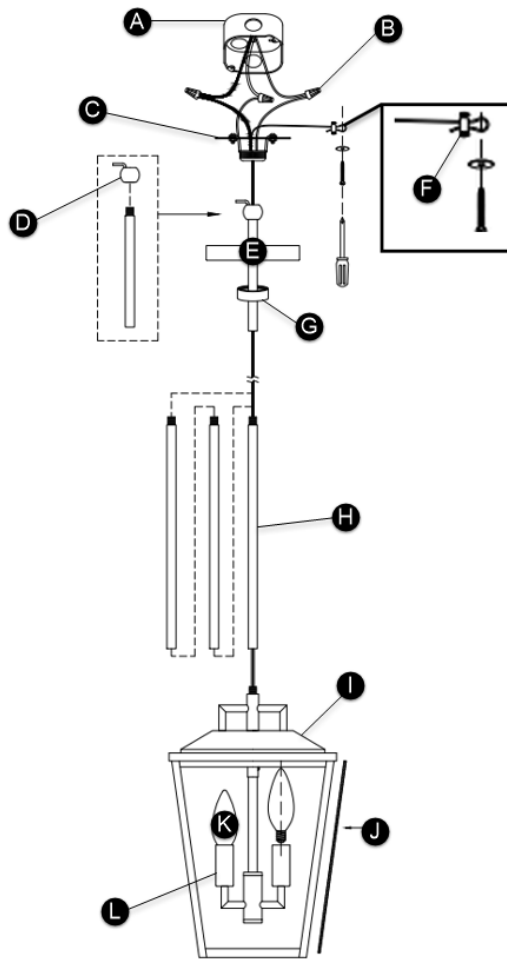

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nuts
- C. Mounting Plate
- D. Swivel/Half Ball
- E. Canopy
- F. Safety Cable
- G. Collar Nut
- H. Stem Assembly
- I. Fixture
- J. Glass Panel
- K. Bulbs (Not Included)
- L. Socket

## INSTRUCTIONS

### I. Preparing the Fixture

1. Slide the glass panel into the frame from the side of the frame. Position it to the frame side closely and then secure it in place by bending the tabs. Repeat these steps for all the glass panels.
2. Screw the half ball to the top stem. Then screw the stems together to the desired length.  
**Note:** For outdoor applications, please apply Loctite to threads of stems at installation to reduce risk of wind rotating fixture.
3. Feed the fixture wires and safety cable through the stem assembly, then screw the stem assembly to the top of the fixture.
4. Then feed the fixture wires and safety cable through the screw collar, canopy, and half ball assembly; then screw it onto the stem assembly.
5. Secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.
6. Loop and secure the safety cable over a structure that agrees with the local building code.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, round and/or smooth) and hot power line wire
  - b) Neutral fixture wire (white, square and/or rigid) and neutral power line wire
4. Carefully tuck all wires into the junction box.

### III. Installing the Fixture

1. Slide the canopy over the mounting plate and secure it in place with the collar nut.
2. Screw the bulb(s) into the socket(s). Refer to the label on the socket for max wattage information.