


ECHO MEDIUM & LARGE PENDANTS


KP1171; KP1181

General Product Information


Please visit www.visualcomfort.com for product specs.




ETL LISTED
Intertek




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




BULB(S) (NOT INCLUDED)




CONVERTS TO LED




ADAPTABLE TO SLOPED CEILINGS




CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty



FCC Statement

Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



MEASURING TAPE

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

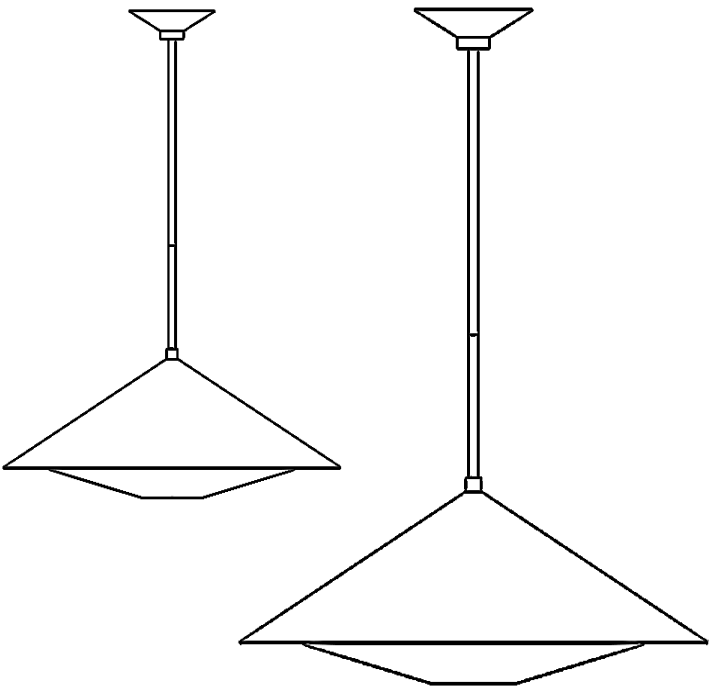

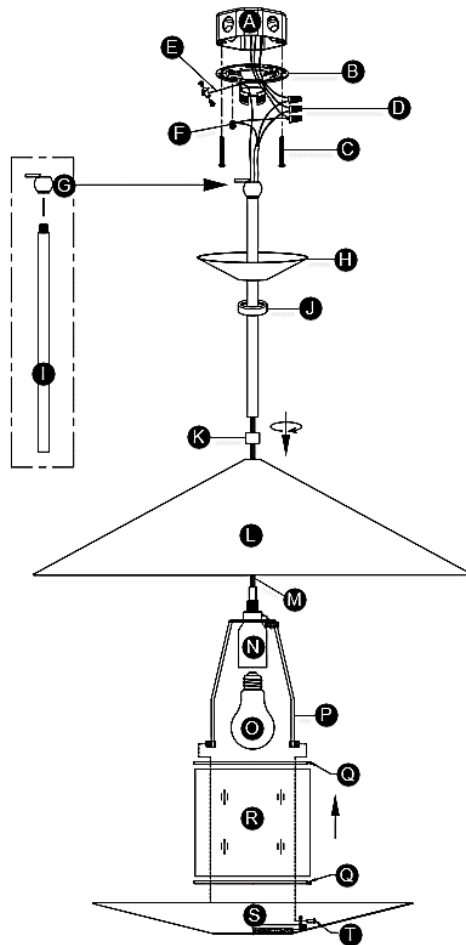

FIXTURE PARTS

- A. Junction box
- B. Mounting Plate with Screw Collar
- C. Mounting Screws (2)
- D. Wire Nut Connections
- E. Safety Cable
- F. Ground Screw
- G. Half Ball
- H. Canopy
- I. Stem Assembly
- J. Collar Nut
- K. Coupler
- L. Top Shade
- M. Fixture Wires/Cord
- N. Socket
- O. Bulb (Not Included)
- P. Bracket
- Q. Rubber Rings
- R. Glass Shade
- S. Bottom Shade
- T. Fixtures Screws (3)

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully unbox and examine all the items included in the packaging of the pendant.
2. Secure the mounting plate with the screw collar to the junction box using the mounting screws.
3. Install the bracket of the socket assembly to the bottom shade assembly with the fixture screws.
4. Screw the bulb into the socket. Refer to the socket label for max wattage information.
5. Mount the rubber rings on the top and bottom of the glass, then place the glass on the bottom shade assembly.
6. Feed the fixture wires and safety cable through the top shade and coupler.
7. Place the top shade over the bracket and the glass. Then secure it by tightening the coupler over the top shade.
8. Determine the desired height of the fixture and complete the stem assembly accordingly by screwing the items together.
9. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball assembly.
10. Screw the stem assembly on top of the fixture and screw the half ball assembly on the stem assembly.
11. Lift the assembled fixture and slide the half ball assembly onto the screw collar portion of the mounting plate.
12. Loop and secure the safety cable over a stable structure that agrees with local building codes.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (smooth) to hot power line wire
 - b) Neutral fixture wire (textured) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate with the screw collar and secure it in place by screwing the collar nut tightly onto it.