




KHAN LARGE & EXTRA-LARGE CHANDELIERS

SLC1084; SLC1074

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

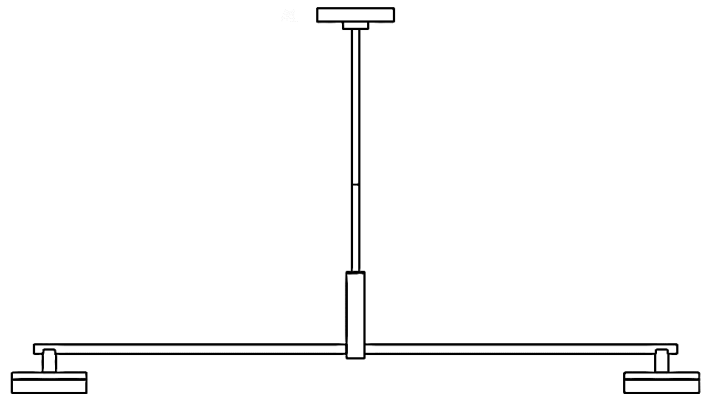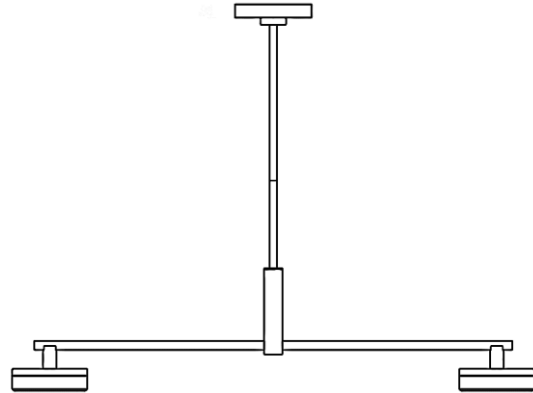

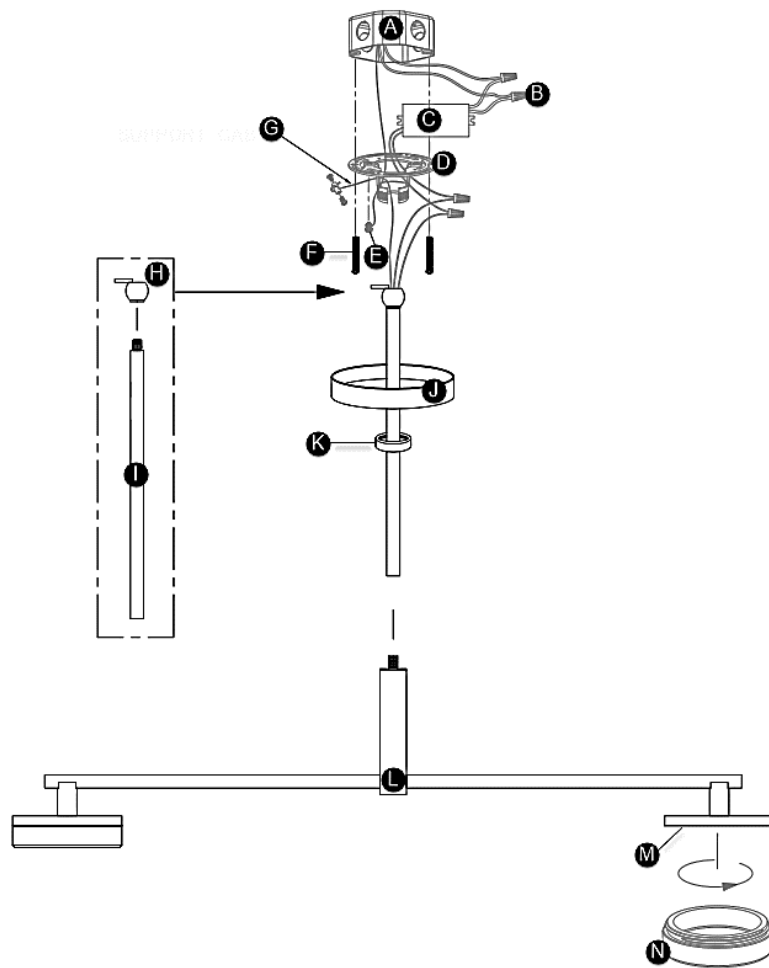

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collar
- E. Ground Screw
- F. Mounting Screws (2)
- G. Safety Cable
- H. Half Ball
- I. Stem Assembly
- J. Canopy
- K. Collar Nut
- L. Fixture
- M. LED Assemblies
- N. Shades

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Determine the desired height of the fixture and complete the stem assembly to suit by screwing the stems together.
3. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball assembly.
4. Screw the stem assembly on top of the fixture.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Place the driver in the junction box and connect the input driver wires to the supply wires using the wire nuts.
3. Install the mounting plate onto the junction box with the mounting screws, ensuring the output driver wires are accessible.
4. Slide the half ball assembly onto the screw collar portion of the mounting plate.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Loop and secure the safety cable over a stable structure that agrees with local building codes.
7. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to negative (-) output driver wire
 - b) Positive (+) fixture wire to positive (+) output driver wire
8. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
9. Carefully tuck the driver and all the wires into the junction box.
10. Place the canopy onto the mounting plate with screw collar and secure it in place by screwing the collar nut tightly onto it.

III. Installing the Fixture

1. To finish, screw the glass shades onto the LED assemblies to complete the installation.