


KENNEWICK SMALL WALL LANTERN

DJO1071

General Product Information



Intertek


SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION




OUTDOOR



WET LOCATION SAFE




NEC COMPLIANT JUNCTION BOX




BULB(S) (NOT INCLUDED)



CONVERTS TO LED




PLEASE SEE visualcomfort.com FOR PRODUCT SPECS




BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!




Product Warranty



FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



CAULK GUN



WIRE CUTTER

Safety Information


CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp. Install and use this product in adherence with local electrical codes and regulations.

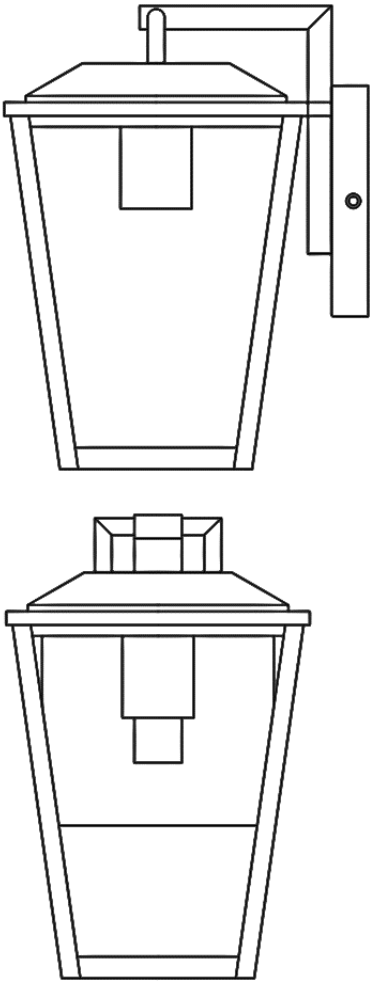

FIXTURE PARTS

- A. Junction Box
- B. Fixture Wires
- C. Ground Wire
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Screws
- G. Fixture
- H. Socket
- I. Bulb (Not Included)
- J. Glass Panel

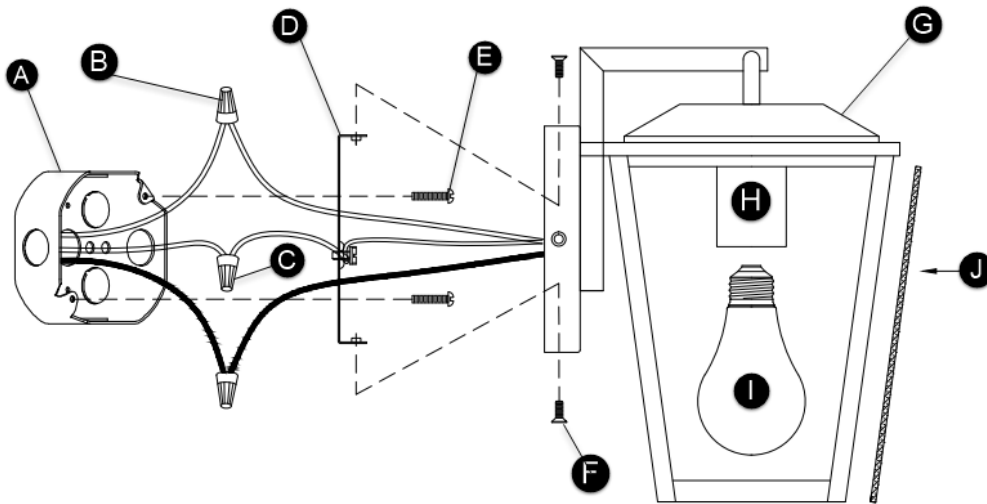

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the fixture body by unscrewing the fixture screws.
2. Secure the mounting plate to the junction box with the mounting screws provided.
3. Slide the glass panel into the frame from the side of the frame. Position it to the frame side closely and then secure it in place by bending the tabs. Repeat these steps for all the glass panels.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Secure the fixture to the mounting plate from the fixture's base with the fixture screws provided.
2. Screw the bulbs into the sockets. Refer to the label on the socket for max wattage information.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.