












KENNEWICK MEDIUM, LARGE & EXTRA WALL LANTERNS



DJO1062; DJO1084; DJO1113

General Product Information













Suggested/Required Tools




Safety Information


CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp. Install and use this product in adherence with local electrical codes and regulations.

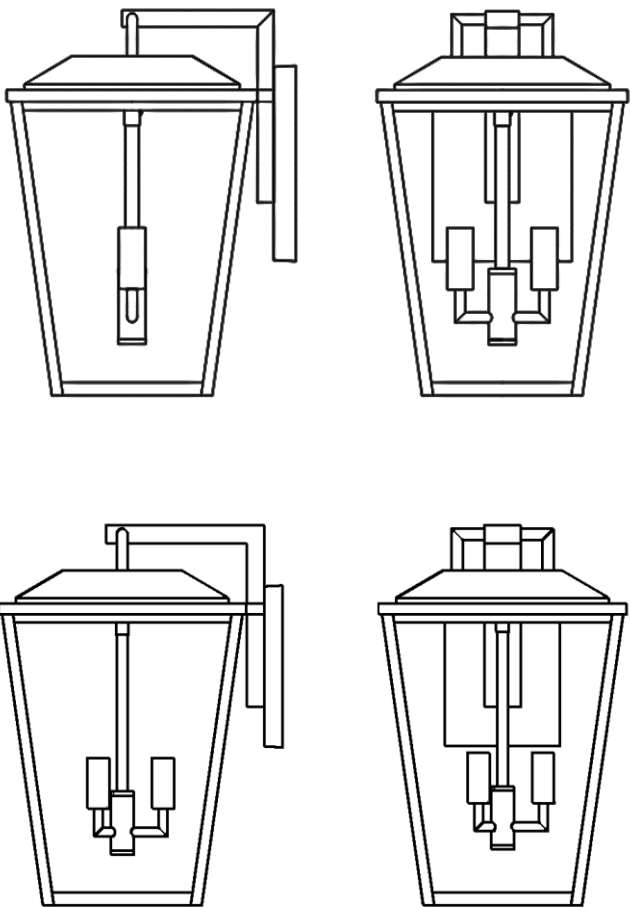

FIXTURE PARTS

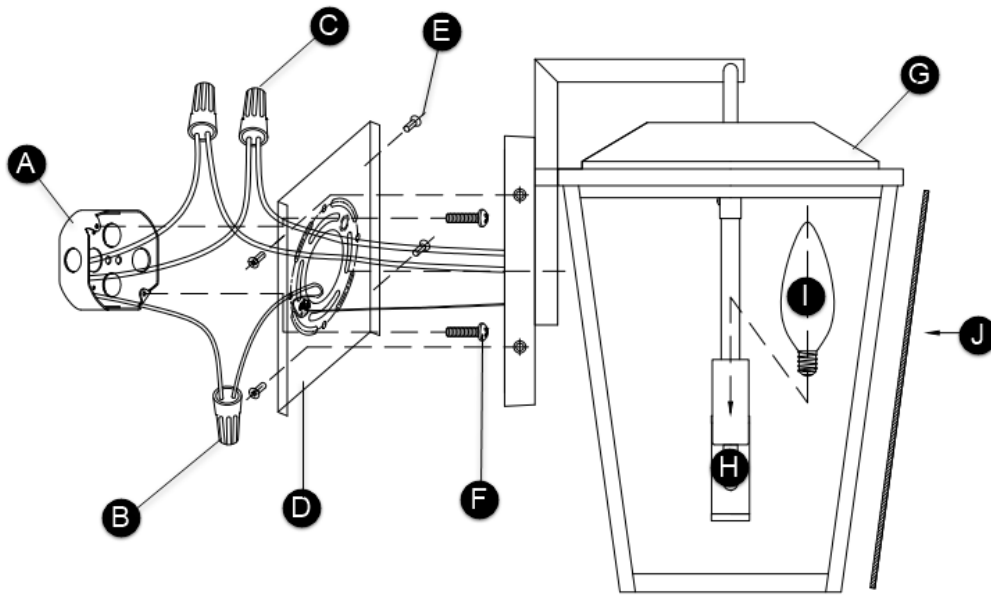

- A. Junction Box
- B. Fixture Wires
- C. Ground Wire
- D. Mounting Plate
- E. Fixture Screws
- F. Mounting Screws
- G. Fixture
- H. Socket
- I. Bulb(s) (Not Included)
- J. Glass Panel

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the fixture body by unscrewing the fixture screws.
2. Secure the mounting plate to the junction box with the mounting screws provided.
3. Slide the glass panel into the frame from the side of the frame. Position it to the frame side closely and then secure it in place by bending the tabs. Repeat these steps for all the glass panels.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Secure the fixture to the mounting plate from the fixture's base with the fixture screws provided.
2. Screw the bulb(s) into the socket(s). Refer to the label on the socket for max wattage information.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.