


## Assembly Instructions For Dual Mount Hanging System

### Convert carabiner system to swivel system

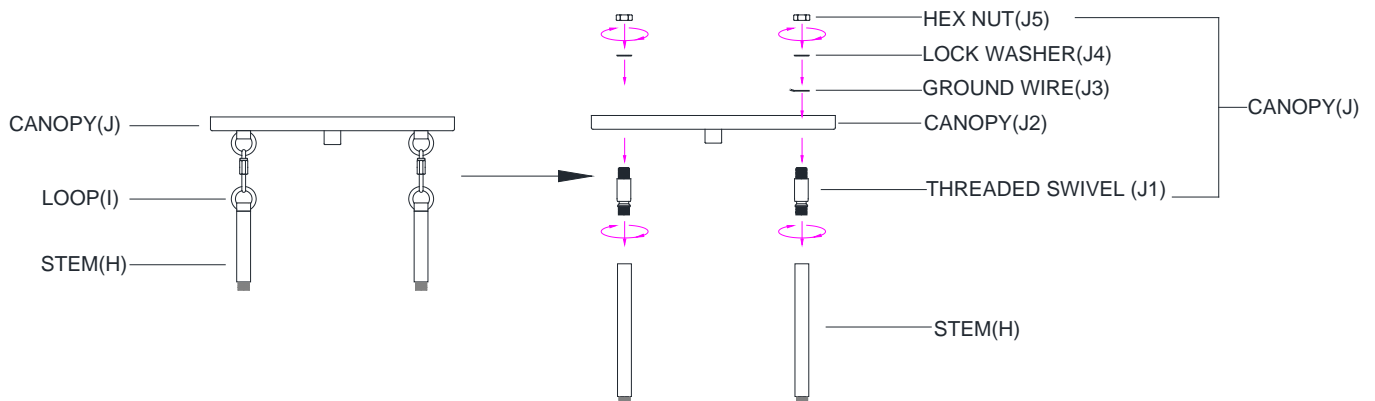

1. Remove the loops (I) from the canopy (J) and stem (H).
2. Install the threaded swivel (J1) onto the top of stem (H).
3. Place the canopy (J2), ground wire (J3) and lock washer (J4) over the threaded swivel (J1), securing with the hex nut (J5).

\*This fixture contains hardware for our dual mount hanging system that allows for the use of a carabiner or an adjustable swivel. Either can be used with the included stems. The carabiner allows for a greater degree of adjustment for sloped ceilings. It is NOT intended to modify the fixture to be chain hung, as the chain may not be available for purchase in the needed finish.