

Spur Grande Chandelier**700TDSPRG_ 1.4****VISUAL COMFORT & Co.**

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product may be dimmed with a low-voltage electronic dimmer.

The fixture can be mounted to a ceiling with a 35° slope maximum.

This instruction shows a typical installation.

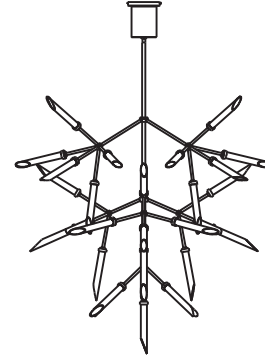
**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

Two Person Installation Recommended

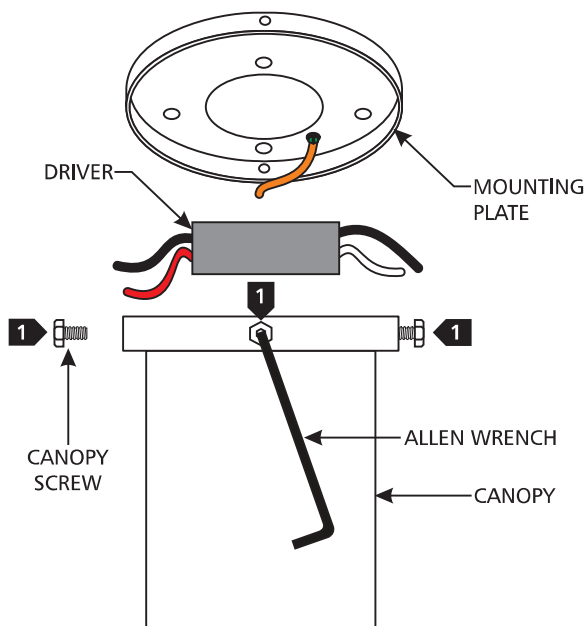
Install the Mounting Plate**1A**

- 1** Remove all the canopy screws using the provided Allen Wrench.
- 2** Remove the mounting plate and driver from the canopy.

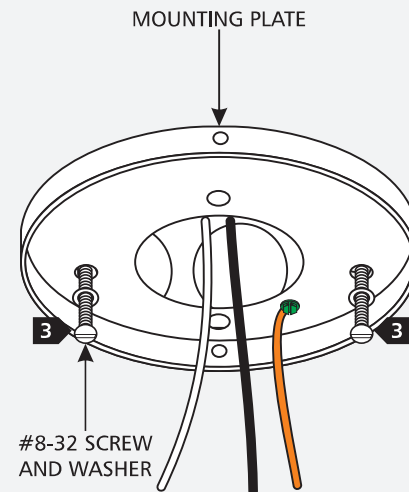1B


- 3** Secure the mounting plate to the electrical box with the two washers and #8-32 screws provided.

Assemble the Fixture

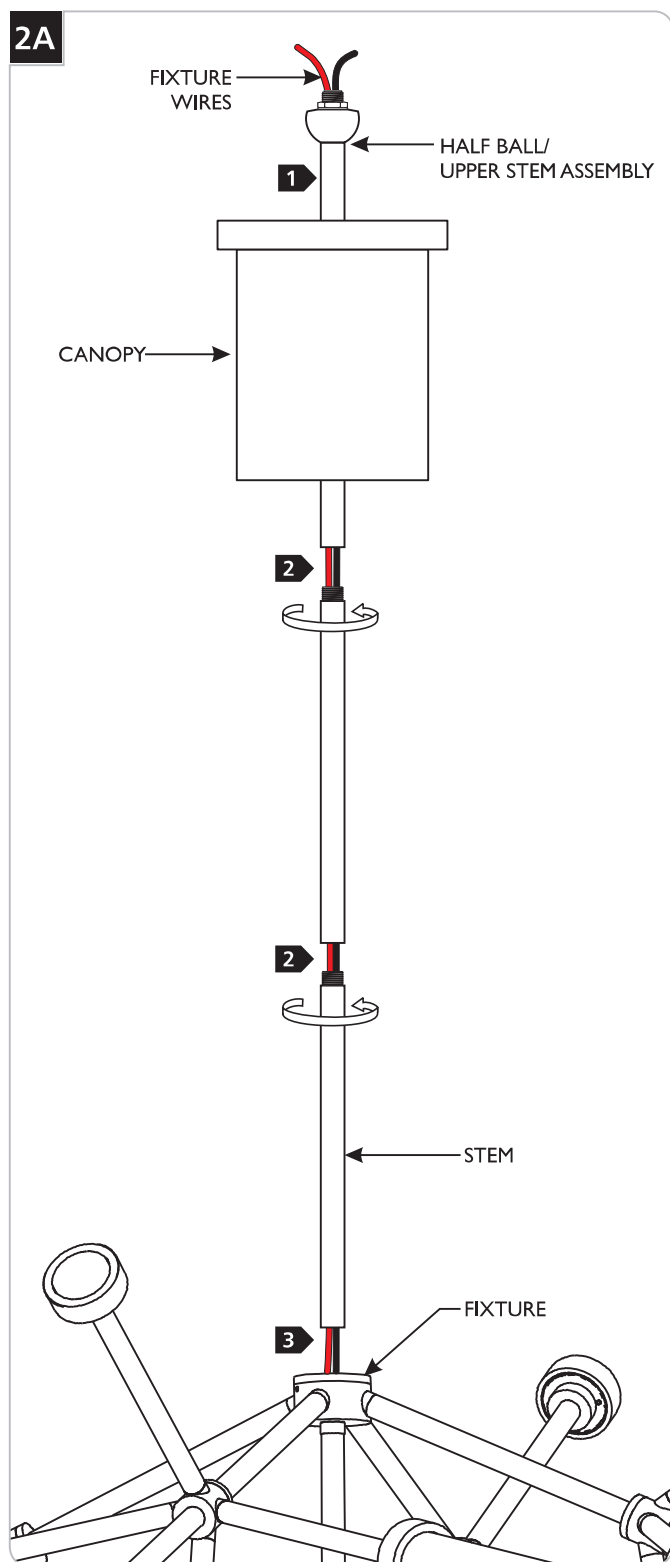


- 1** Feed the half ball/upper stem assembly through the top of the canopy.
- 2** Determine the desired height of the fixture using the provided stems and assemble them by screwing them together.
- 3** Feed the fixture wires through the stem and half ball assemblies, then screw the stem assembly to the fixture.


Install the Fixture

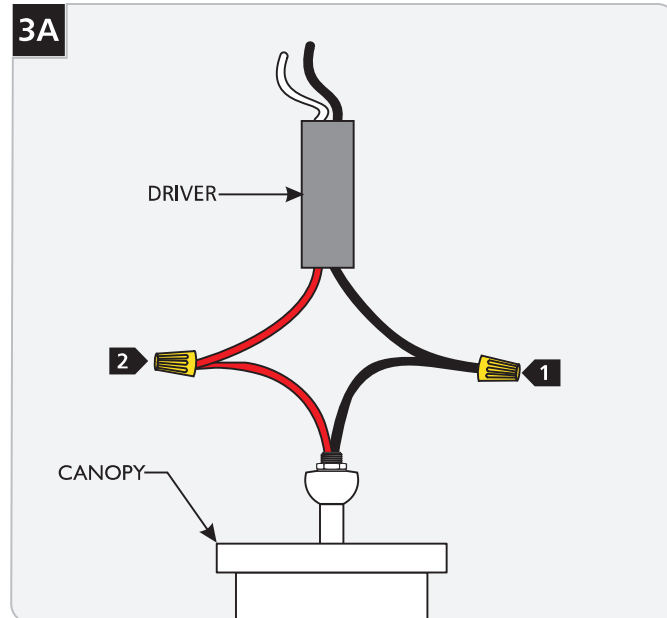

- 1** Connect the black driver wire to the black fixture wire with a wire nut.
- 2** Connect the red driver wire to the red fixture wire with a wire nut.
- 3** Neatly place the driver and wires inside the canopy.

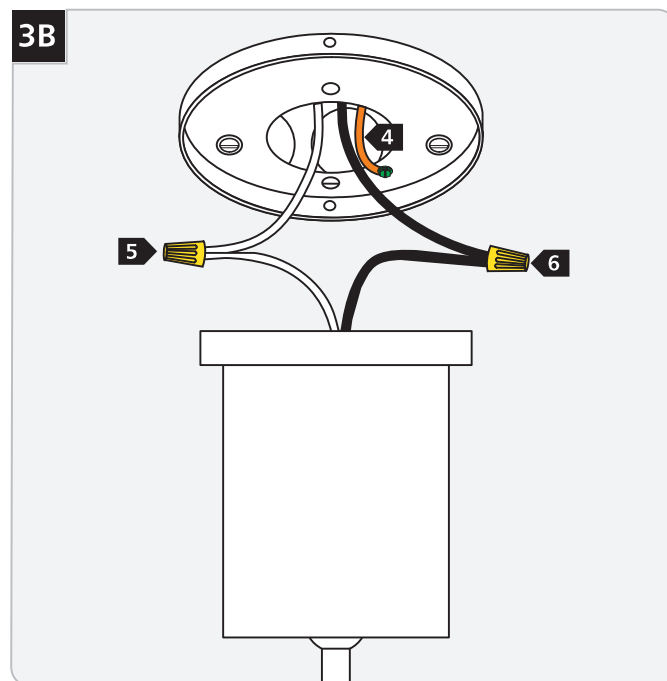


- 4** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5** Connect the white driver wire to the neutral power line wire with a wire nut.
- 6** Connect the black driver wire to the hot power line wire with a wire nut.

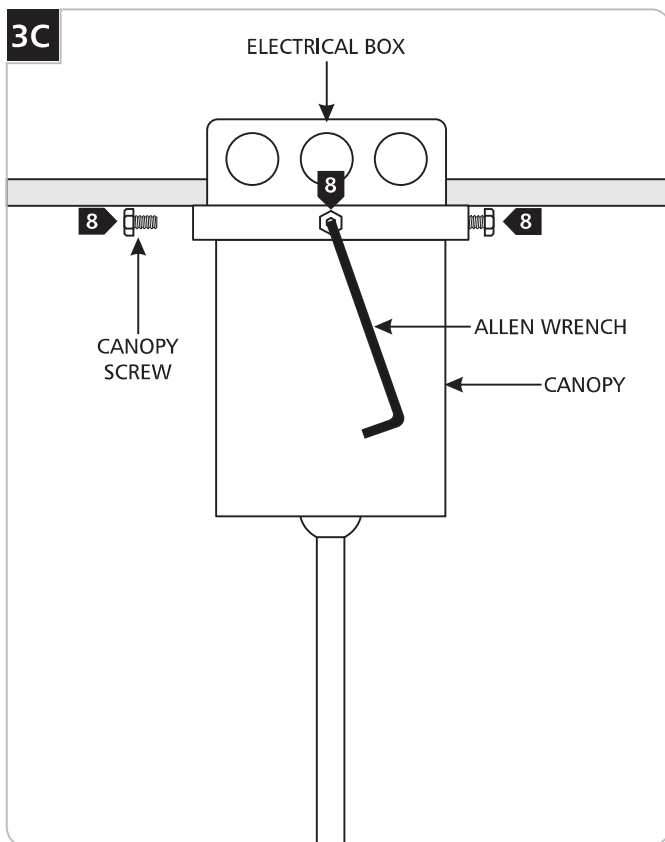

- 7** Neatly place all wires and wire nut connections inside the canopy.
- 8** Align the canopy holes with the mounting plate holes. Secure the canopy in place by tightening the canopy screws using the provided Allen Wrench.
- NOTE: The fixture can be mounted to a ceiling with a 42 degree slope maximum.**

Install the Glass

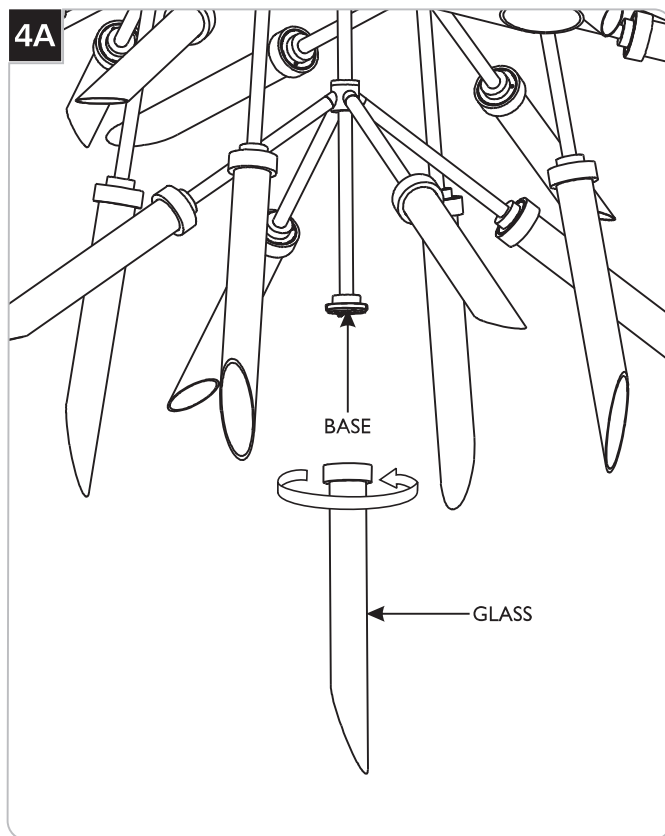

- 1** Install the glass by screwing it into the base. **Do not over-tighten.**

