

# GENERATION BRANDS, LLC TEST REPORT

**SCOPE OF WORK**

LED Performance Testing

**MODEL NUMBER**

7000WVEX93012BDOUNV

**PROJECT NUMBER**

G104349704

**REPORT NUMBER**

104349704CHI-030

**ISSUE DATE**

8/18/2020

**REVISED DATE**

None

**TEST DATES**

08/15/2020 through 08/17/2020.

**DOCUMENT CONTROL NUMBER**

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



**REPORT NUMBER**

104349704CHI-030

**MODEL NUMBER(s)**

7000WVEX93012BDOUNV

**REPORT RENDERED TO:**

GENERATION BRANDS, LLC  
7400 LINDER AVE  
SKOKIE, IL 60077

**STATEMENT OF LIMITATION**

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

**AUTHORIZATION**

The testing performed was authorized by signed quote number Qu-01080748-3.

**TEST STANDARDS**

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

In Charge of Testing:



Ian Smith  
Engineer  
Lighting Division

Reviewer:



Jeff Davis  
NA Technical Lead  
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**SAMPLE INFORMATION**

**REPORT NO. 104349704CHI-030**

ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH08122020093108-030	7000WVEX93012BDOU NV	VEX 12 OUTDOOR WALL DOWNLIGHT	Production	8/12/2020

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	7000WVEX93012BDOUNV	1

SAMPLE PHOTOS - TESTED CONFIGURATIONS



**SUMMARY**

**REPORT NO. 104349704CHI-030**

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	7000WVEX93012BDOUNV
Product Description:	VEX 12 OUTDOOR WALL DOWNLIGHT
LED Model No.:	LUMINUS: CXM-6-30-90-18-AC40-F5-3
Driver Model No.:	ERP ESS020W-0450-42
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	128.4	132.1
Input Power (W) @ 120VAC (Vac)	7.17	7.17
Lumen Efficacy (lm/W)	17.9	18.4
Input Power Factor (I) @ 120VAC (Vac)	0.953	0.951

Criteria	Results
Input ATHD (%) @ 120VAC (Vac)	14.87
Correlated Color Temperature (K)	3007
Color Rendering Index - Ra (I)	94.3
Color Rendering Index - R9 (I)	70.6
Duv (I)	0.0001
Chromaticity Coordinate (x)	0.437
Chromaticity Coordinate (y)	0.404
Chromaticity Coordinate (u')	0.250
Chromaticity Coordinate (v')	0.521

TEST METHODS

**SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS**

No seasoning was performed in accordance with IESNA LM-79.

**INTEGRATING SPHERE TESTING**

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

**TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING**

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

## TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 104349704CHI-030

Test Configuration	Tested Model No.	Pass/Fail/NA
1	7000WVEX93012BDOUNV	NA

### PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ( )
Up	120.0	62.7	7.17	0.953

Light Output (lm)	Lumen Efficacy (lm/W)
128.4	17.9


### INTENSITY SUMMARY - CANDELA

Angle	0	22.5	45	67.5	90
0	83	83	83	83	83
5	77	76	78	82	85
10	69	70	74	80	83
15	63	64	69	75	79
20	57	57	62	69	76
25	49	50	55	62	72
30	40	42	48	55	68
35	33	34	40	49	63
40	25	27	32	42	56
45	18	20	25	36	48
50	12	12	19	24	17
55	2	4	12	1	0
60	2	2	1	0	0
65	1	1	0	0	0
70	1	0	0	0	0
75	0	0	0	0	0
80	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0
95	0	0	0	0	0
100	0	0	0	0	0
105	0	0	0	0	0
110	0	0	0	0	0
115	0	0	0	0	0
120	0	0	0	0	0
125	0	0	0	0	0
130	0	0	0	0	0
135	0	0	0	0	0
140	0	0	0	0	0
145	0	0	0	0	0
150	0	0	0	0	0
155	0	0	0	0	0
160	0	0	0	0	0
165	0	0	0	0	0
170	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

Entire luminous intensity matrix found in .IES file

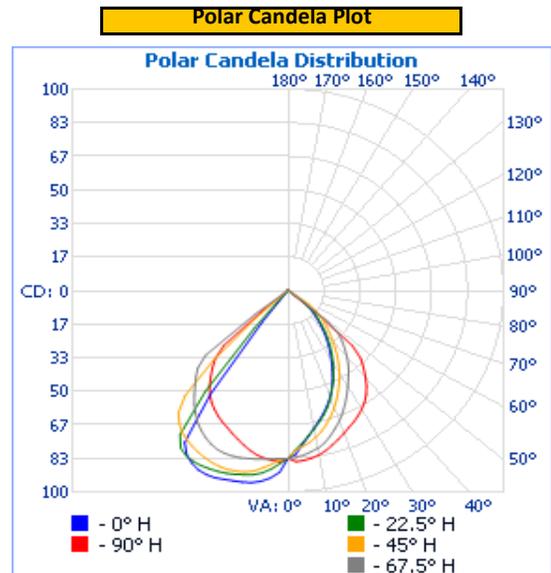

ILLUMINANCE SUMMARY

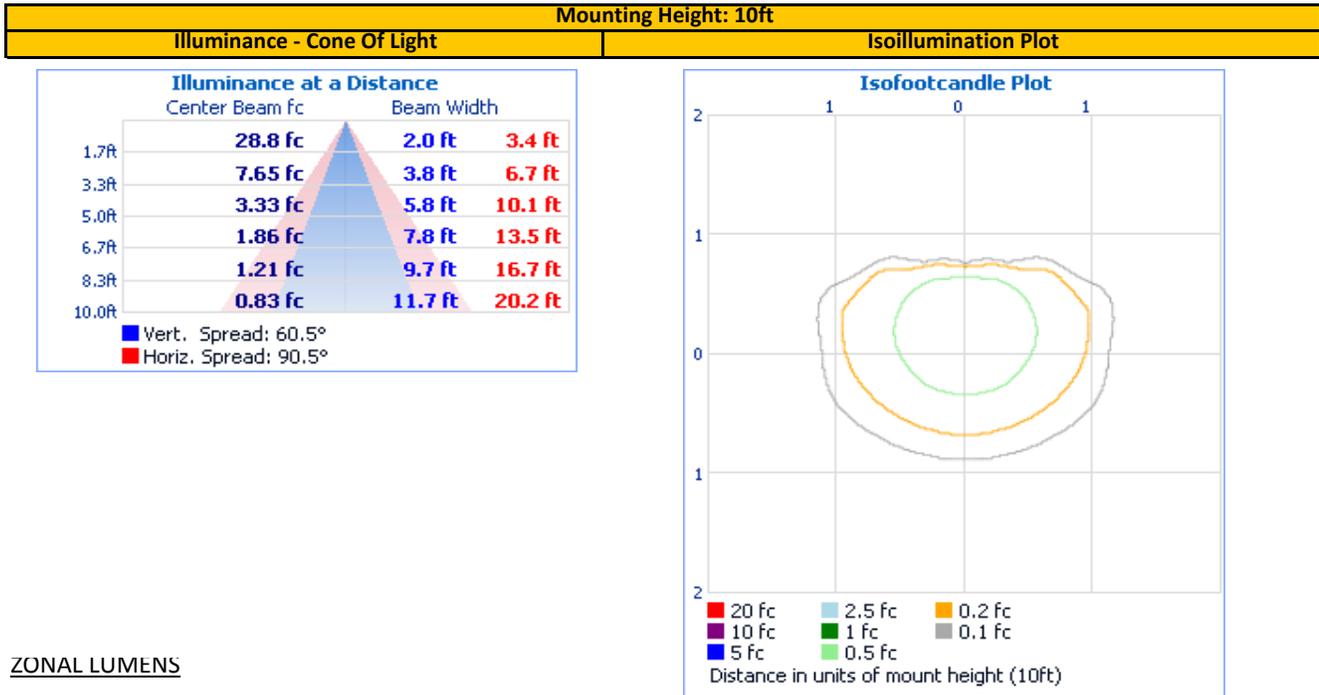

ZONAL LUMENS

Zonal Lumen Summary					
Zone	Lumens	Luminaire	Zone	Lumens	Total
0-30	64.1	49.9%	90-100	0.0	0.0%
0-40	100.2	78.0%	100-110	0.0	0.0%
0-60	127.9	99.6%	110-120	0.0	0.0%
60-90	0.5	0.4%	120-130	0.0	0.0%
70-100	0.1	0.1%	130-140	0.0	0.0%
90-120	0.0	0.0%	140-150	0.0	0.0%
0-90	128.4	100.0%	150-160	0.0	0.0%
90-180	0.0	0.0%	160-170	0.0	0.0%
0-180	128.4	100.0%	170-180	0.0	0.0%

## INTEGRATING SPHERE TESTING

REPORT NO. 104349704CHI-030

Test Configuration	Tested Model No.	Pass/Fail/NA
1	7000WVEX93012BDOUNV	NA

### PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation
Up

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ( )	Input ATHD (%)
120.08	62.8	7.17	0.951	14.87

### Measured at 120.08(Vac)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra ( )	CRI - R9 ( )
132.1	18.4	3007	94.3	70.6


Duv ( )	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
0.0001	0.437	0.404	0.250	0.521

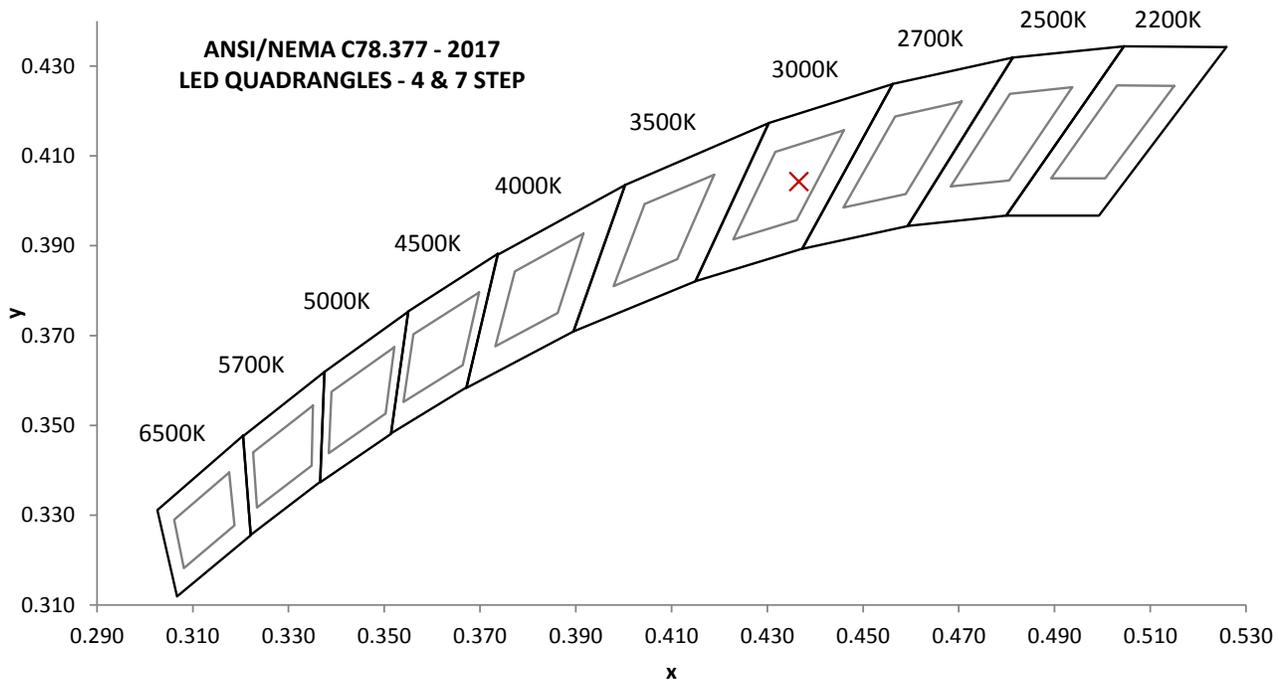

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm
350	0.0	460	1.1	570	1.9	680	1.5
355	0.0	465	0.9	575	2.0	685	1.3
360	0.0	470	0.8	580	2.0	690	1.2
365	0.0	475	0.6	585	2.1	695	1.1
370	0.0	480	0.6	590	2.2	700	0.9
375	0.0	485	0.6	595	2.3	705	0.8
380	0.0	490	0.7	600	2.4	710	0.7
385	0.0	495	0.9	605	2.5	715	0.6
390	0.0	500	1.0	610	2.5	720	0.6
395	0.0	505	1.1	615	2.6	725	0.5
400	0.0	510	1.2	620	2.7	730	0.4
405	0.0	515	1.3	625	2.7	735	0.4
410	0.0	520	1.3	630	2.6	740	0.3
415	0.0	525	1.4	635	2.6	745	0.3
420	0.0	530	1.5	640	2.6	750	0.2
425	0.1	535	1.5	645	2.5	755	0.2
430	0.1	540	1.6	650	2.4	760	0.2
435	0.2	545	1.7	655	2.2	765	0.1
440	0.4	550	1.7	660	2.1	770	0.1
445	0.7	555	1.8	665	2.0	775	0.1
450	1.3	560	1.8	670	1.8	780	0.1
455	1.5	565	1.9	675	1.6	---	---

Without correction of sample absorption.

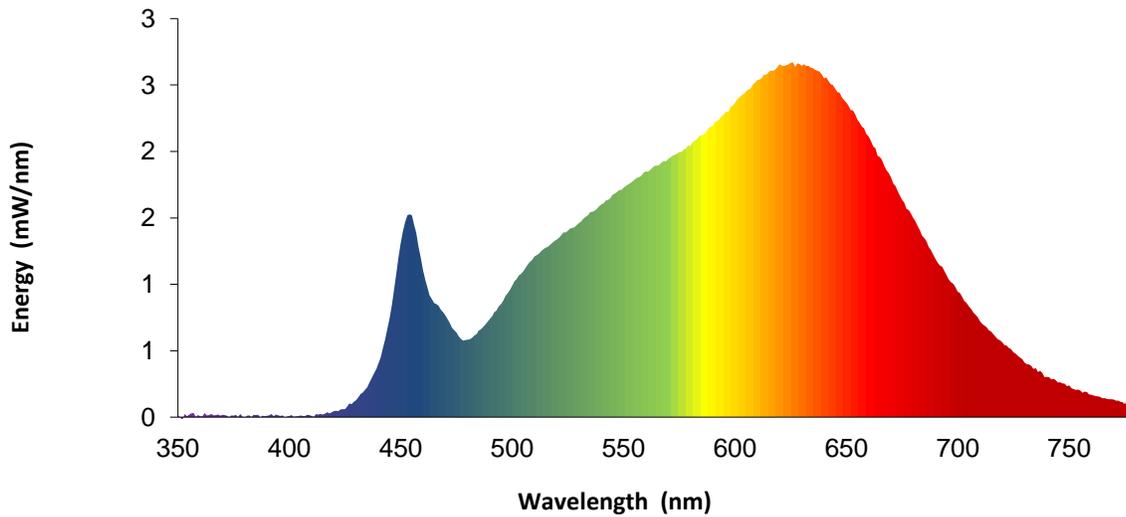

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

**EQUIPMENT LIST**

**REPORT NO. 104349704CHI-030**

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
2	Omega Thermometer	DPI8-C24	146920	10/3/2019	10/3/2020
3	LSI High Speed Mirror Goniometer	6440T	146928	VBU	VBU
4	Newport Thermohygrometer	iServer	146957	12/2/2019	12/2/2020
5	Pacific AC Power Supply	118-ACX	CHI0153	VBU	VBU
6	Multi Channel Spectroradiometer	OL770	CHI0092	VBU	VBU
7	Newport Humidity Recorder	iServer	CHI0456	10/11/2019	10/11/2020
8	Labsphere Spectroradiometer	CDS-600	146923	VBU	VBU
9	2M Rotating Sphere	7660-ROT	146923	VBU	VBU
10	Omega thermometer	USB TC08	EQAH002615	4/7/2020	4/7/2021
11	Ametek DC Power Supply	XFR150-8	1468464	VBU	VBU
12	Yokogawa Power Meter	WT210	146880	10/2/2019	10/2/2020
13	Chroma Power Supply	61604	CHI0371	VBU	VBU
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

**REVISION HISTORY**

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---