

# VISUAL COMFORT & Co.

Light efficiency:


**74 Lumen/Watt**

**Output: 1329 lm**

**Peak: 487 cd**

**Power: 17.9 W**

**PF: 1.0**

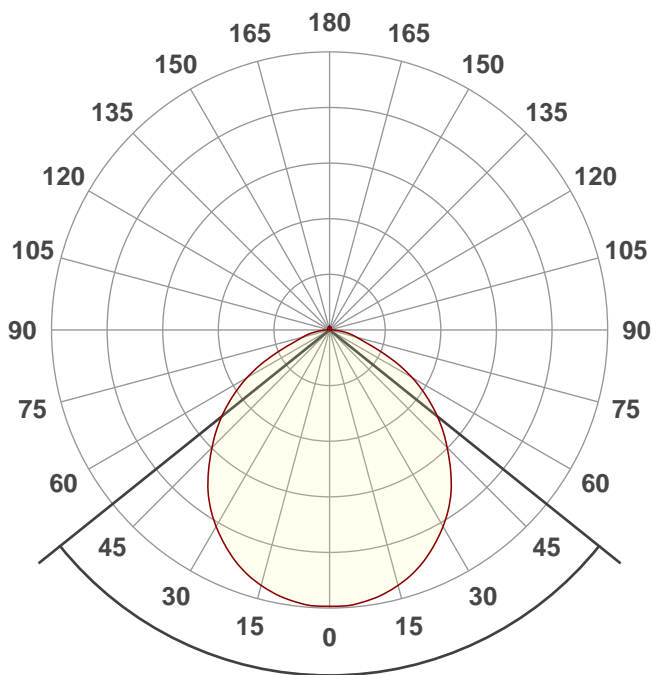

**102.5°**

Beam angle


Product name:

**TR1159\_700DES18B-LED930**

Date and time:

**6/7/2023 8:46:17 AM**

**Power**

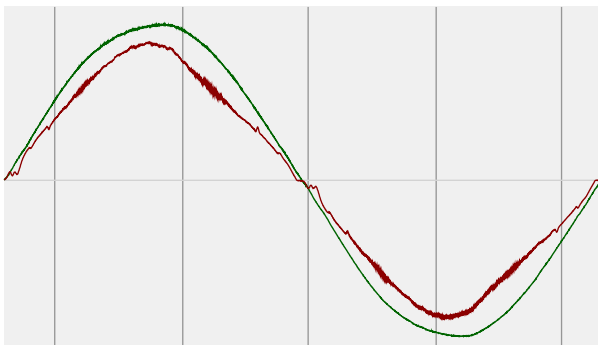


**Voltage: 121 V**

**Current: 0.148 A**

## ISO Diagrams

ISO candela diagram

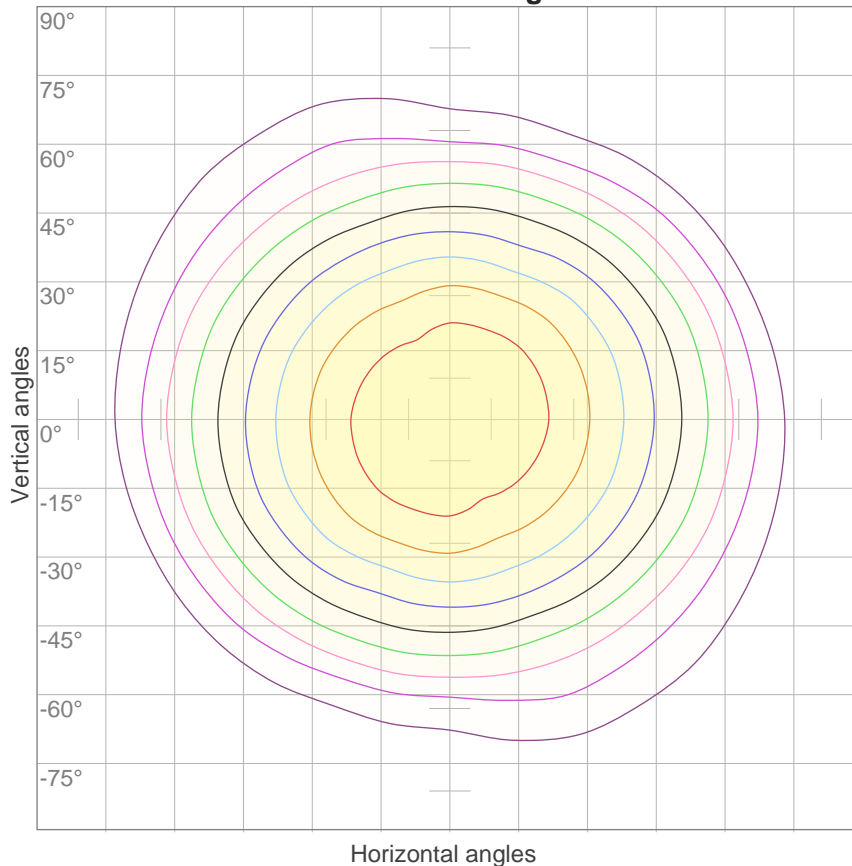


10%	48 cd
20%	96 cd
30%	144 cd
40%	193 cd
50%	241 cd
60%	289 cd
70%	337 cd
80%	385 cd
90%	433 cd

Conditions:

Number of c-planes: 16

Candela at center: 481 cd

ISO lux diagram

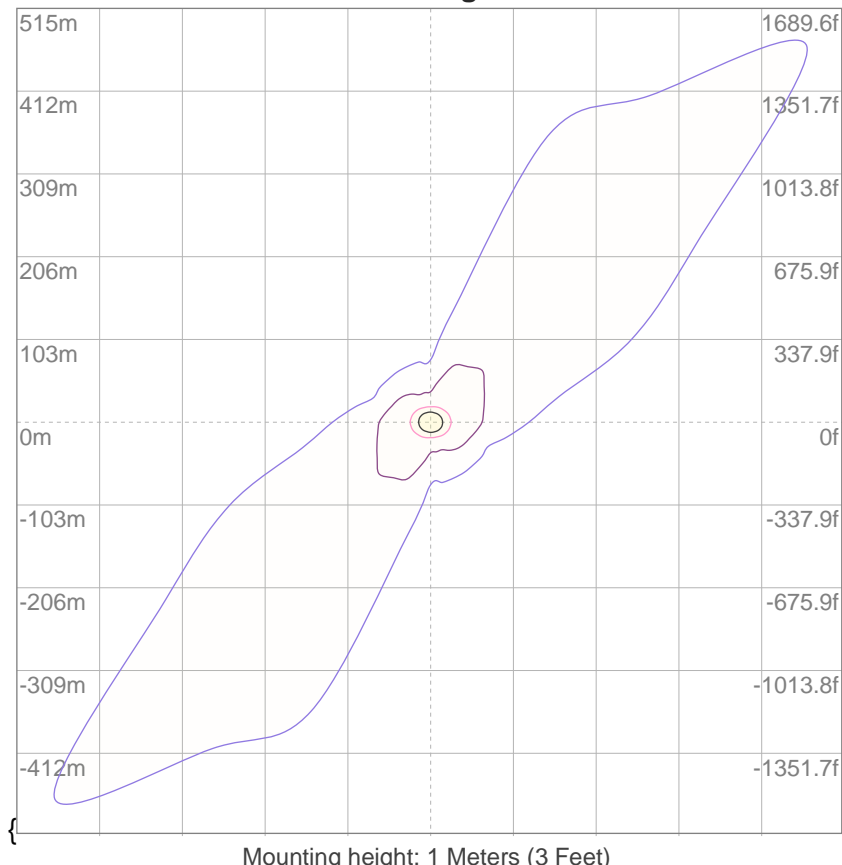

3%	14 lx
5%	24 lx
10%	48 lx
30%	144 lx
50%	241 lx

Conditions:

Number of c-planes: 16

Lux at center: 481 lx

*Lux distribution on a surface  
when lamp is mounted at 1  
meter from the surface.*