

Hilo 16 Flush Mount**700FMHLO16_****1.1****VISUAL COMFORT & Co.****MODERN COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Dimmable with most LED compatible ELV and TRIAC dimmers.


Ceiling or wall mount.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

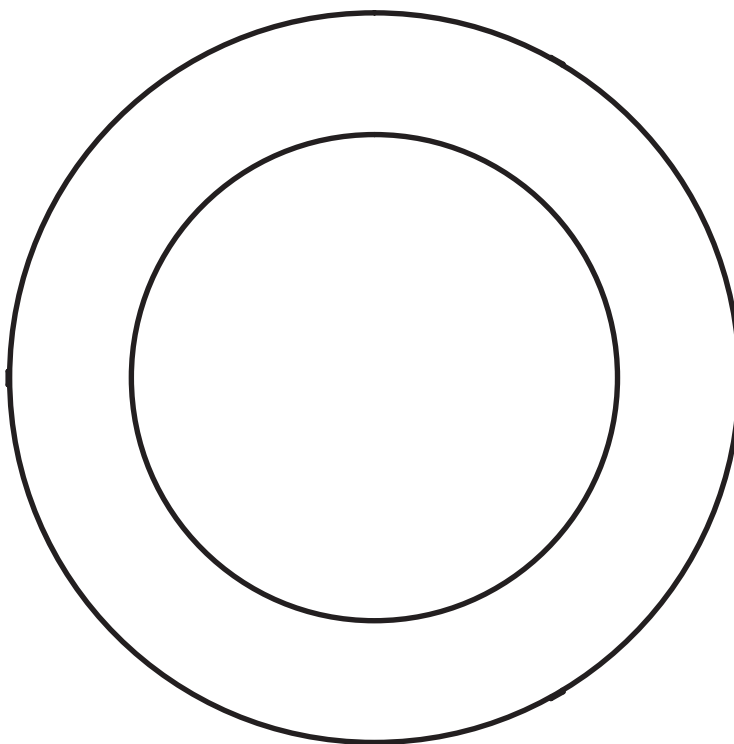SAVE THESE INSTRUCTIONS!

Install the Fixture

1A

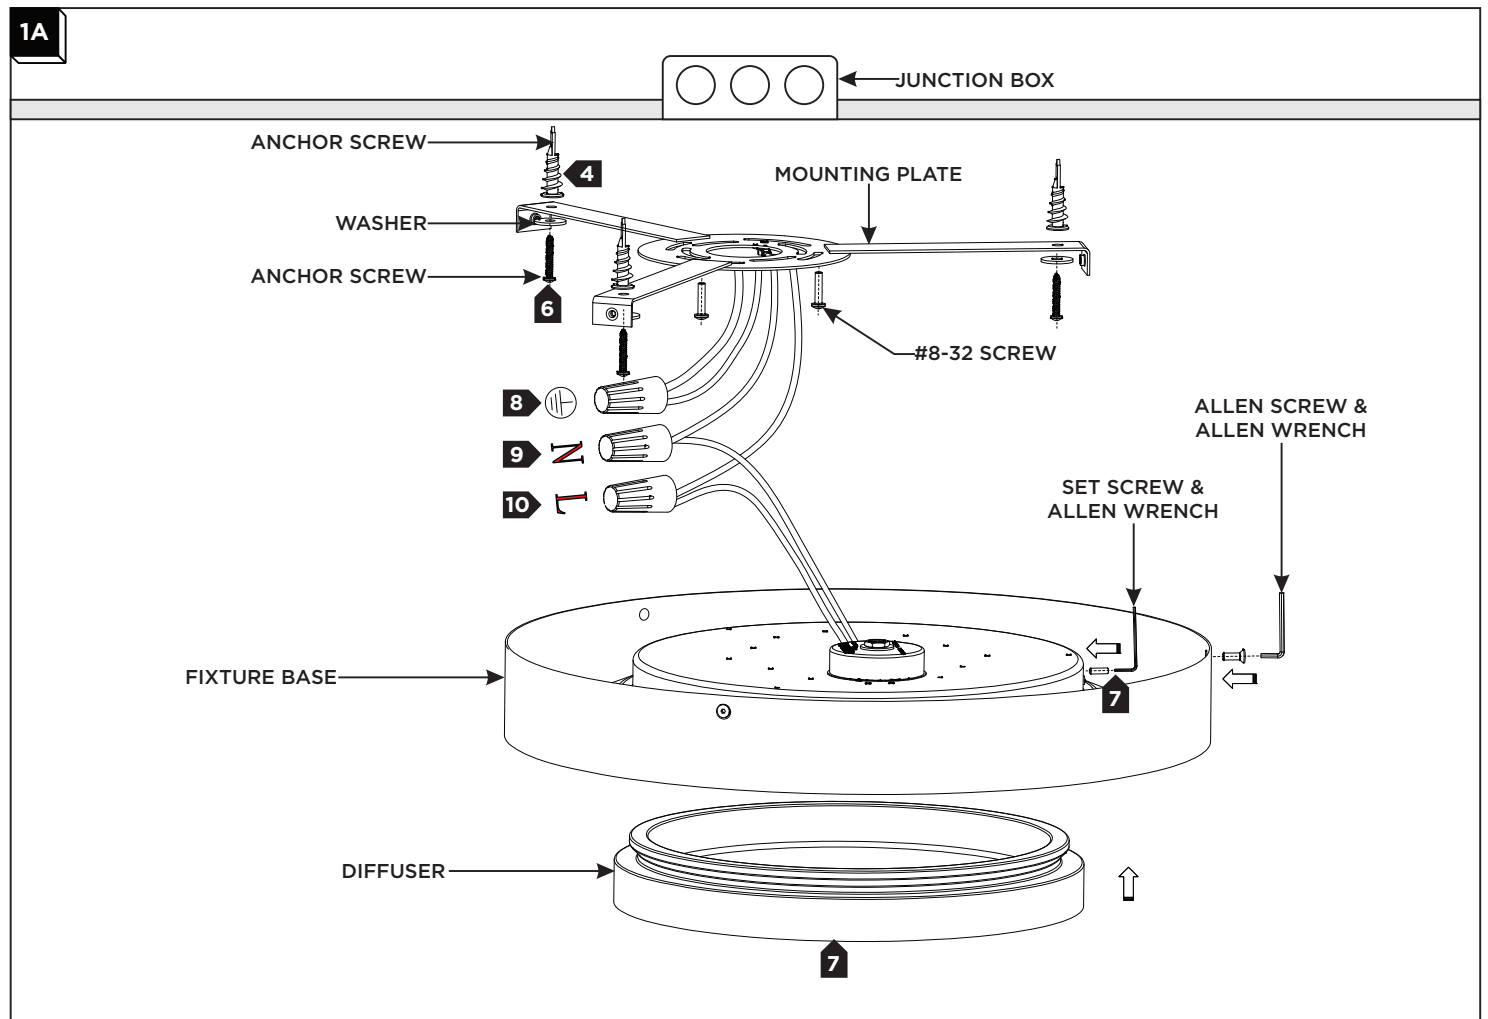

- 1** Separate the mounting plate from the fixture by removing the Allen screws with the provided Allen wrench.
- 2** Temporarily install the mounting plate to the junction box with the #8-32 screws.
- 3** Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 4** Line up an anchor tip with the center of an anchor hole and push the anchor into the ceiling/wall up to the threads. Screw the anchor in the rest of the way with a screwdriver.
- 5** Secure the mounting plate to the junction box with #8-32 screws.
- 6** Slide an anchor screw through a washer and screw it into the anchor to secure the mounting plate to the ceiling/wall. Repeat steps 4 and 6 for the remaining anchors.
- 7** Screw the diffuser into the fixture base and secure it in place with the set screw using the provided Allen wrench.
- 8** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 9** Connect the white fixture wire to the neutral power line with a wire nut.
- 10** Connect the black fixture wire to the hot power line with a wire nut.
- 11** Properly place the wires and wire nut connections into the junction box, then install the fixture onto the mounting plate with the Allen screws using the provided Allen wrench.