

Aspenti 5, 14, and 20 Outdoor

700OWAST_

1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for wet locations.

This product may be dimmed with a low-voltage electronic dimmer.

This instruction shows a typical installation.

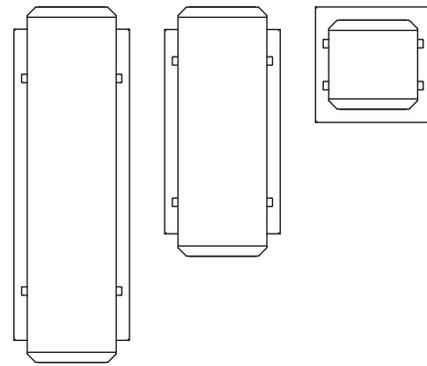


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

Install the Fixture

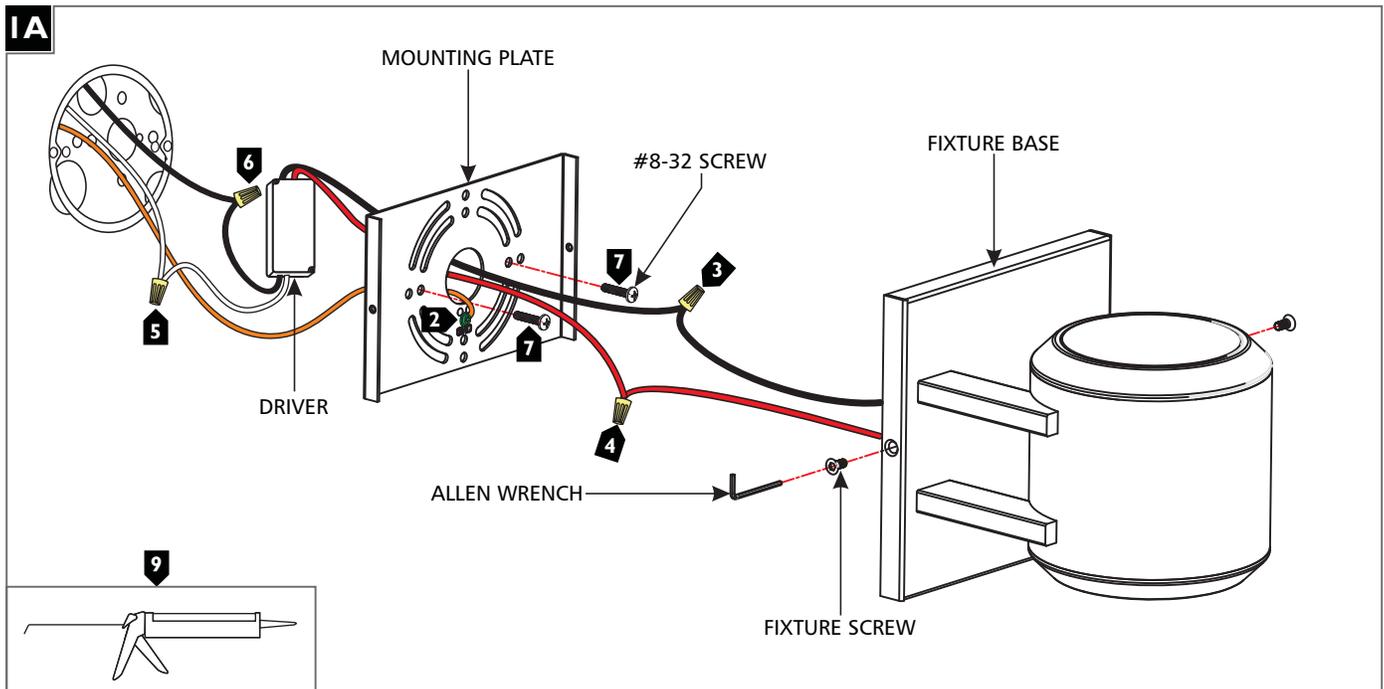

- 1** Remove the fixture screws located on the sides of the fixture base using the provided Allen Wrench, then remove the mounting plate from the fixture base.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the black fixture wire to the black driver wire with a wire nut.
- 4** Connect the red fixture wire to the red driver wire with a wire nut.
- 5** Connect the white driver wire to the neutral power line wire with a wire nut.
- 6** Connect the black driver wire to the hot power line wire with a wire nut.
- 7** Properly place the driver, all wires, and wire nut connections into the electrical box, then secure the mounting plate to the electrical box using the two #8-32 screws provided.
- 8** Mount the fixture back onto the mounting plate and reinstall fixture screws (reversal of step 1A).
- 9** For wet locations, caulk around the entire fixture base with waterproof construction sealant.

SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & CO.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification