

Kosa Ceiling

700FMKOSA13 1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product can be dimmed with most ELV or TRIAC dimmers.

This product can be ceiling mounted only.

This instruction shows a typical installation.




VISUAL COMFORT & Co.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.visualcomfort.com


©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

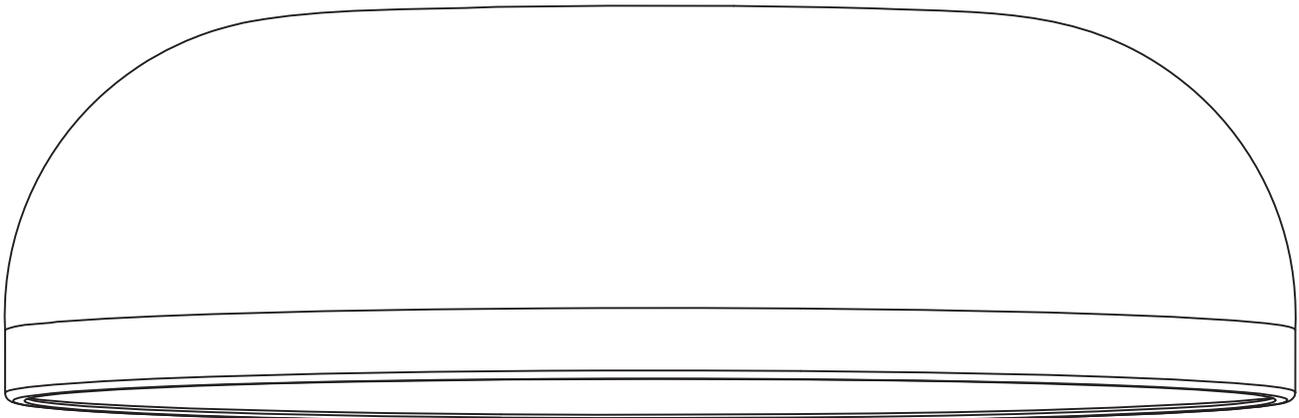

SAVE THESE INSTRUCTIONS!

Install the Fixture

1A

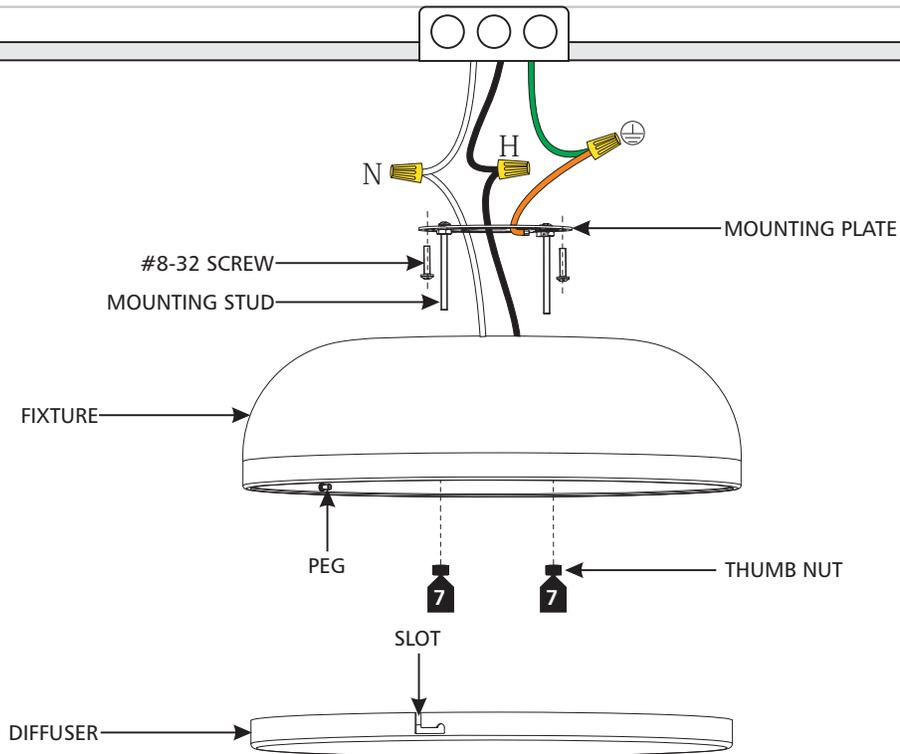

- 1 Remove the diffuser from the fixture by turning it clockwise, then pulling out of the fixture.
- 2 Remove the mounting plate from the fixture by unscrewing the two thumb nuts from the inside of the fixture.
- 3 Secure the mounting plate to the electrical box with the #8-32 screws.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- 7 **For 277V Only:** If using 0-10V dimming, connect the purple and gray wires to a compatible dimmer. If not using 0-10V dimming, cap off the purple and gray wires.
- 8 Neatly place all wires and wire nut connections inside the junction box, place the fixture onto the mounting studs, and secure it in place by screwing the thumb nuts onto the studs.
- 9 Install the diffuser by aligning the slot on the diffuser with the peg in the fixture, inserting the diffuser into the fixture, and rotating clockwise to secure in place. **Ensure that the diffuser is locked in place before releasing.**