


CERNE MINI FLUSH

KWFM19227

General Product Information



Tools Required



NOTE: This fixture can be used as a flush mount or a wall sconce.



Safety Information


SAVE THESE INSTRUCTIONS!

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

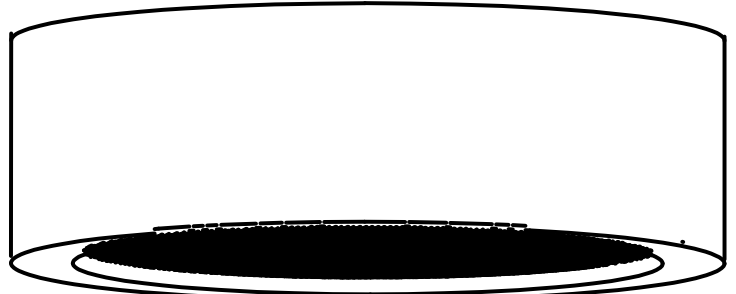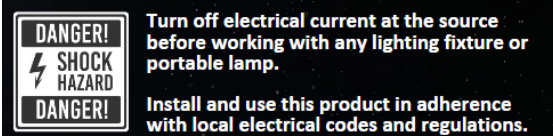

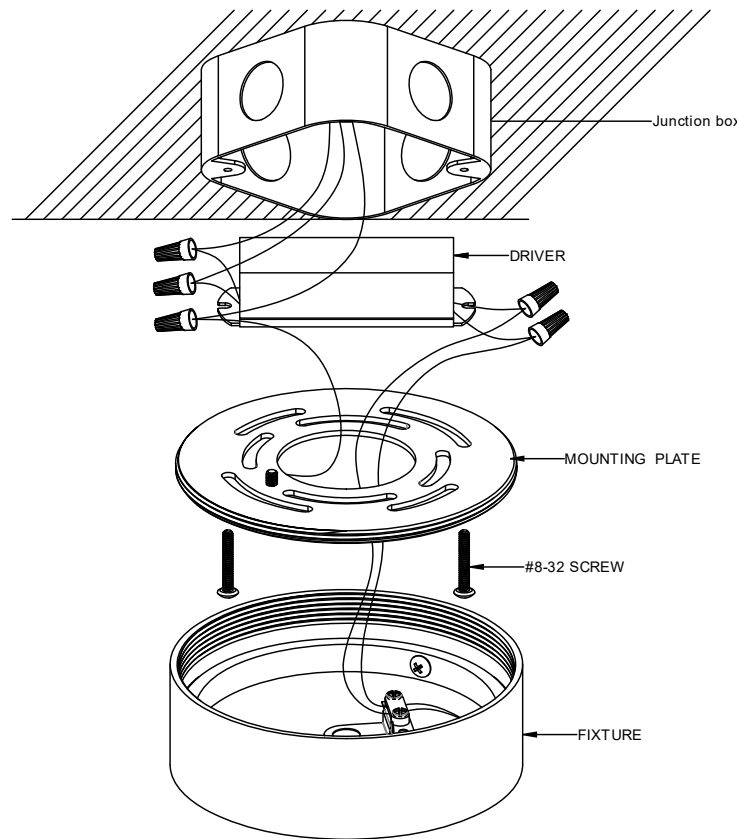

INSTRUCTIONS

I. Preparation

1. Remove the mounting plate from the canopy by turning it counterclockwise.

II. Wiring the Fixture

1. Connect the following wires using a wire nut:
 - a) Input driver wire (white) to the neutral power line wire
 - b) Input driver wire (black) to the hot power line wire

III. Additional Preparation

1. Place the driver into the junction box, ensuring that the driver output wires and the ground wire are accessible.
2. Install the mounting plate to the junction box with the two #8-32 screws (included).

IV. Continuing the Wiring

1. Connect the fixture to a suitable ground in accordance with local electrical codes.
2. Connect the following wires using a wire nut:
 - a) Negative (-) fixture wire to the negative (-) output driver wire
 - b) Positive (+) fixture wire to the positive (+) output driver wire

V. Installing the Fixture

1. Neatly place the driver, wires, and wire nut connections inside the junction box and fixture.
2. Reinstall the fixture to the mounting plate by turning it clockwise.