

## Castor 17 Flush Mount

700FMCST17\_ 1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with most ELV, TRIAC, or 0-10V dimmers.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

### SAVE THESE INSTRUCTIONS!

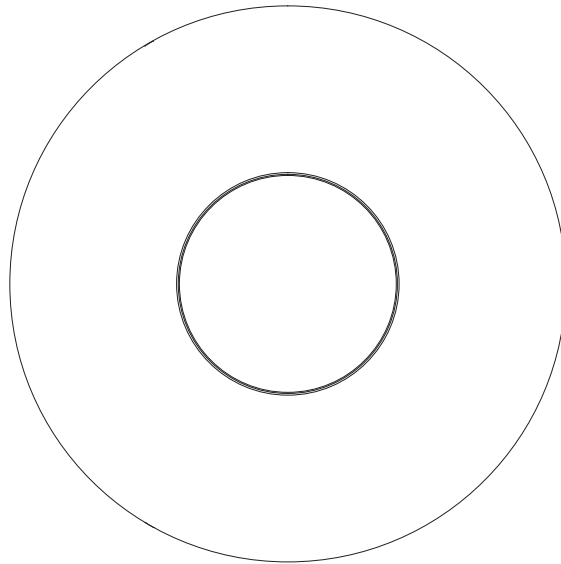

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

## Install the Fixture

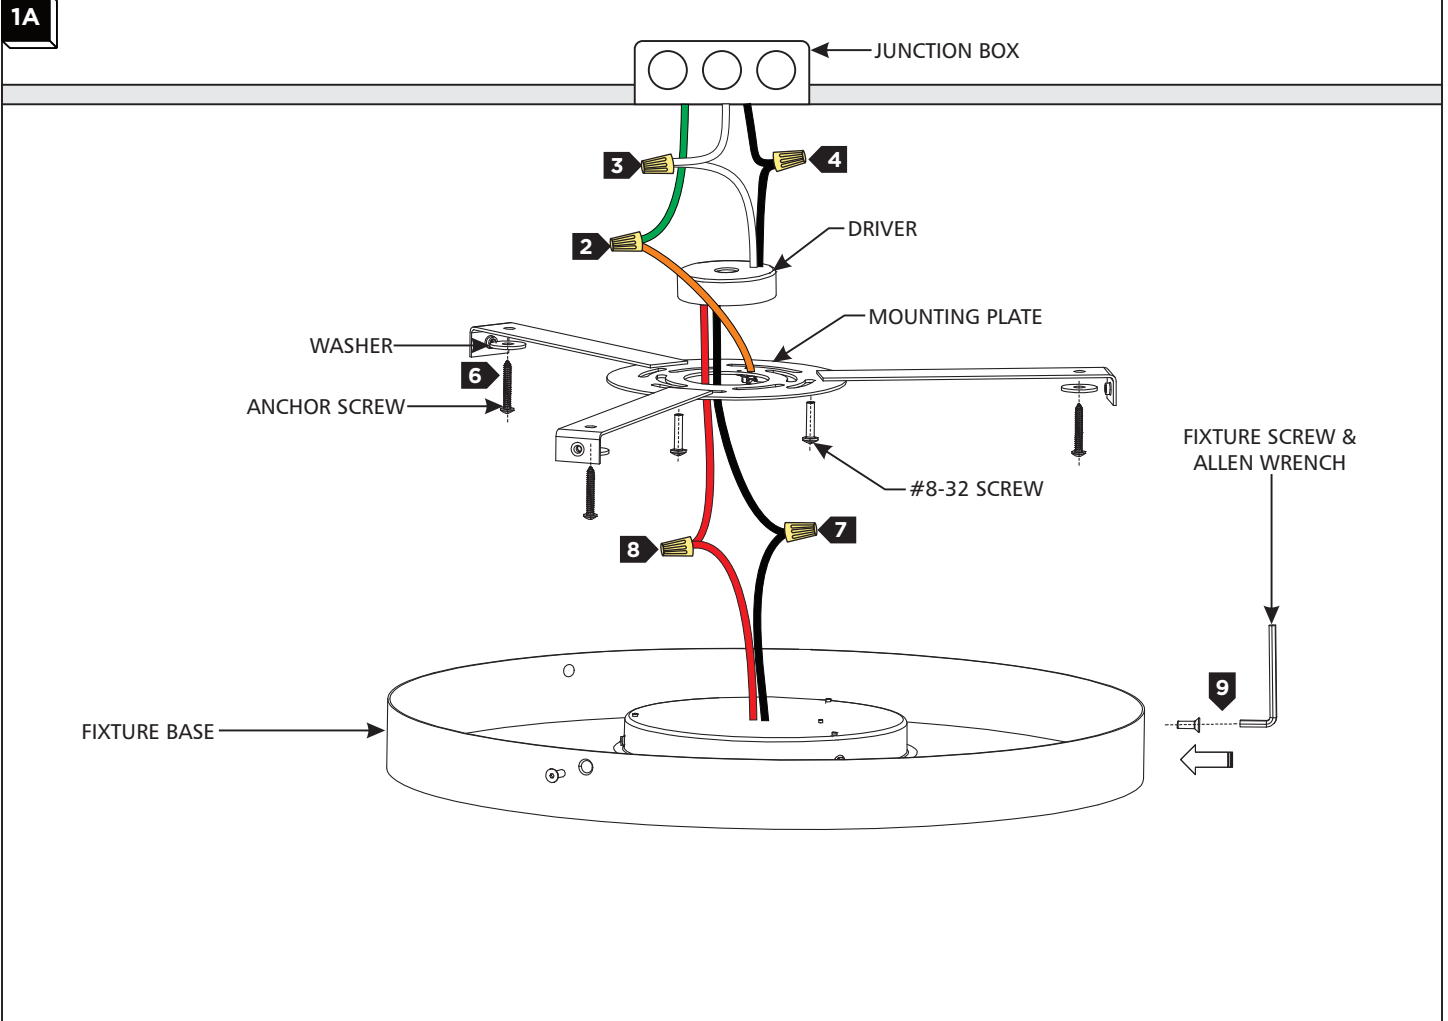

- 1 Separate the mounting plate from the fixture by removing the fixture screws with the provided Allen wrench.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white input driver wire to the neutral power line with a wire nut.
- 4 Connect the black input driver wire to the hot power line with a wire nut.
- 5 Properly place the driver and wire nut connections into the junction box, and install the mounting plate to the junction box using #8-32 screws.
- 6 Drill appropriate sized holes through the holes on the mounting plate. Screw the anchor screws with washers into the holes to fully secure the mounting plate.
- 7 Connect the negative (-) fixture wire to the negative (-) output driver wire with a wire nut.
- 8 Connect the positive (+) fixture wire to the positive (+) output driver wire with a wire nut.
- 9 Properly place the wires and wire nut connections into the junction box, then install the fixture assembly onto the mounting plate with the fixture screws using the provided Allen wrench.