

Surface Canopy

700FJSF4_

2.0

VISUAL COMFORT & Co.

MODERN COLLECTION


GENERAL PRODUCT INFORMATION:



This product is ETL listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.


Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeter).

This product can be dimmed with a low-voltage electronic dimmer, have a rated maximum output of 10 watts, and are compatible with LED elements.

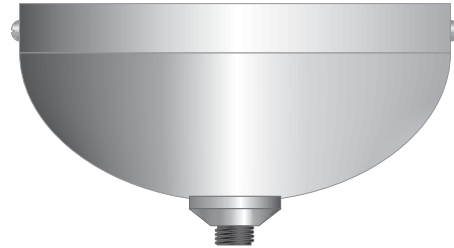


CAUTION—RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**

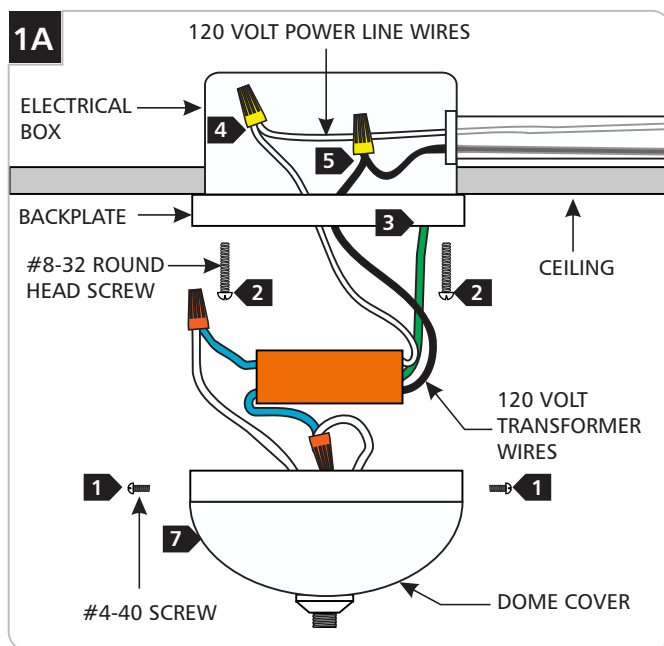

- 1** Remove the #4-40 screws on canopy sides to remove the surface dome cover from the backplate.
- 2** Mount the backplate of the surface mount canopy to the electrical box with the two #8-32 round head screws.
- 3** In accordance with local electrical codes, ground the transformer green wire.
- 4** Connect the white transformer wire to the neutral power line wire with a wire nut.
- 5** Connect the black transformer wire to the hot power line with a wire nut.
- 6** Properly place the transformer, all wires, and wire nut connections into the dome canopy.
- 7** Replace the dome cover onto the backplate. Replace and tighten the two #4-40 screws.

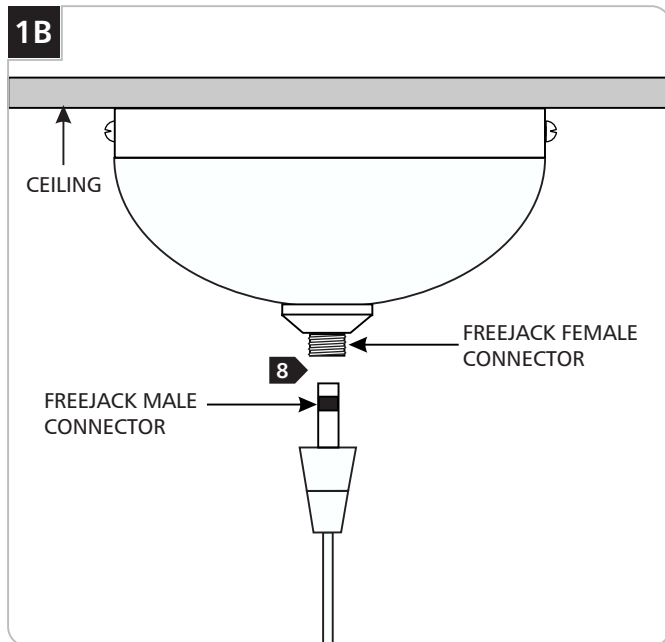

- 8** Screw the fixture FreeJack male connector into the FreeJack female connector.

SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & CO.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification