


NYRA LARGE & GRANDE PENDANTS

SLPD284; SLPD28530

General Product Information




WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.


Install and use this product in adherence with local electrical codes and regulations.



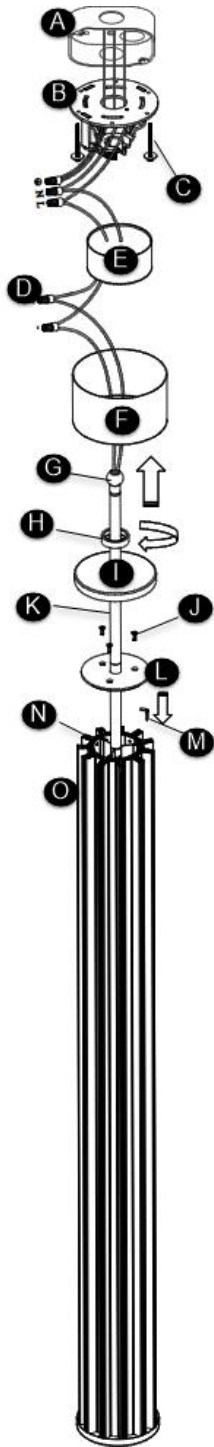

FIXTURE PARTS

- A. Junction Box
- B. Mounting Plate
- C. Mounting Screws
- D. Wire Nut Connections
- E. Driver
- F. Canopy
- G. Half Ball
- H. Collar Nut
- I. Cover
- J. Fixture Screws
- K. Stem
- L. Plate
- M. Allen Wrench
- N. Gasket
- O. Fixture
- P. Slots
- Q. Clips
- R. Fins

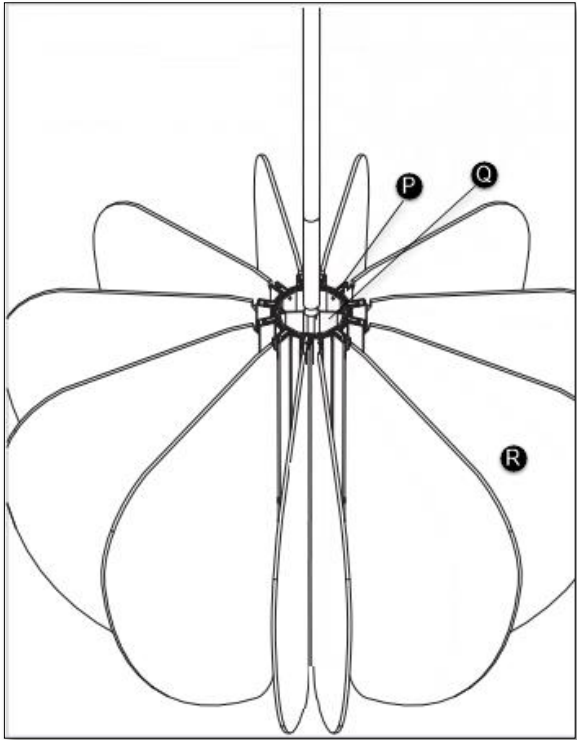

INSTRUCTIONS

I. Preparing the Fixture

1. Unscrew the collar nut from the screw collar on the mounting plate. Remove the mounting plate and driver from the canopy.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Secure the mounting plate with the long screws and washers. **CAUTION: Long screws must be screwed into a solid structure capable of supporting 100lbs.**
4. Feed the fixture wires through the gasket, plate and cover, and place them on the fixture nipple on top of the fixture. **NOTE: Do not secure plate with Allen screws now.**
5. Determine the desired height using the provided stems and feed the fixture wires through the stems and assemble them by screwing them together.
6. Screw the entire stem to the fixture.
7. Feed the fixture wires through the collar nut and canopy, then slide them onto the stem assembly.
8. Feed the fixture wires through the half ball and screw it onto the top of the stem assembly.
9. Slide the half ball into the screw collar on the mounting plate ensuring that it properly drops to the bottom of the collar.
10. Place the driver in the mounting plate brackets.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black/Blue driver wire to black/blue fixture wire
 - b) Red driver wire and red fixture wire
 - c) White driver wires and neutral power line wire
 - d) Black driver wires and hot power line wire
5. Carefully tuck the driver and all the wires into the canopy.

III. Installing the Fixture

1. While supporting the fixture, lift and push the canopy into place against the mounting plate on the ceiling, so that the collar sticks out from the holes in the canopy.
2. Screw the collar nut onto the screw collar to secure the fixture.
3. Carefully slide the top cover, plate, and gasket up to access the center of the fixture.
4. Install the fins by inserting them into the fixture slots and secure them in place with the clips.
5. Slide the plate and the gasket down.
6. Secure the plate to the top of the fixture with the fixture screws and slide the cover back down to finish.