


LINEA 55 & 60 LINEAR CHANDELIERS

KWLS70827; KWLS70727

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

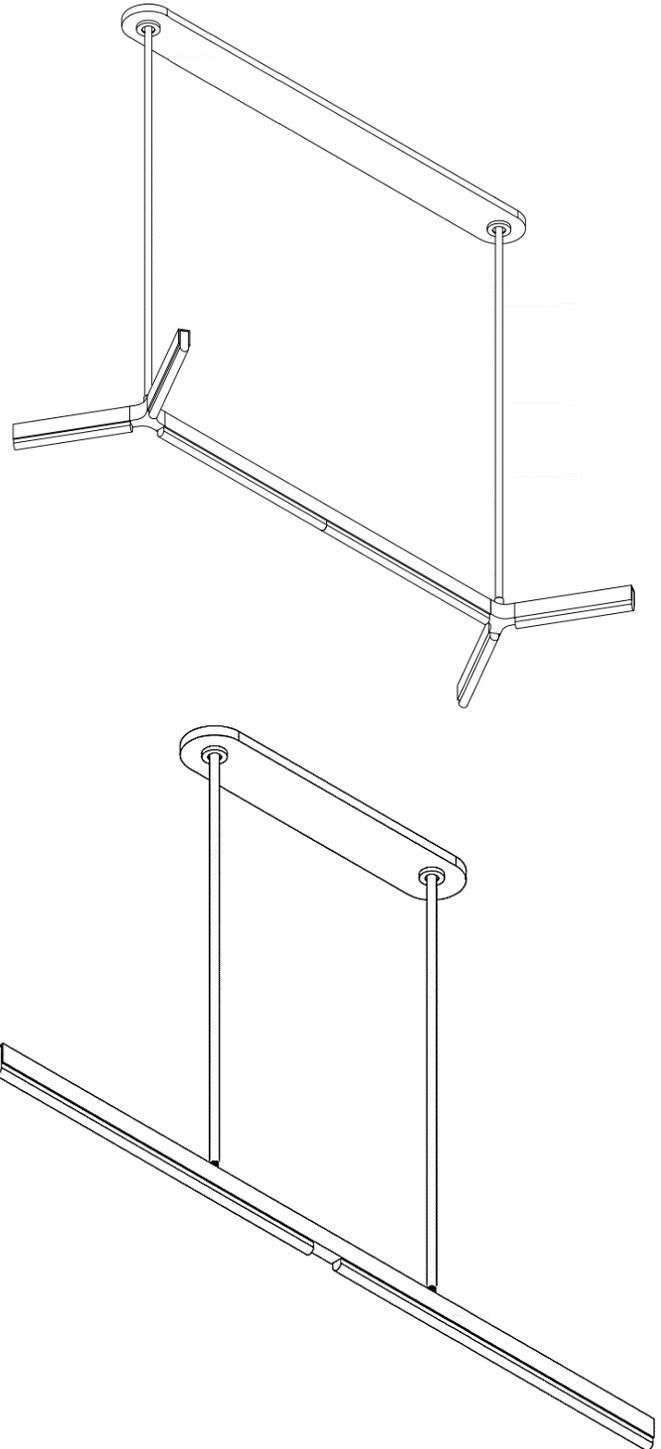

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collar
- E. Anchors
- F. Washers
- G. Anchor Screws
- H. #8-32 Screws
- I. Safety Cable
- J. Cable Grip with Set Screws (Not Illustrated)
- K. Half Balls
- L. Canopy
- M. Collar Nuts
- N. Stem Assemblies
- O. Fixture
- P. Alabaster Light Guide
- Q. Fixture Screws

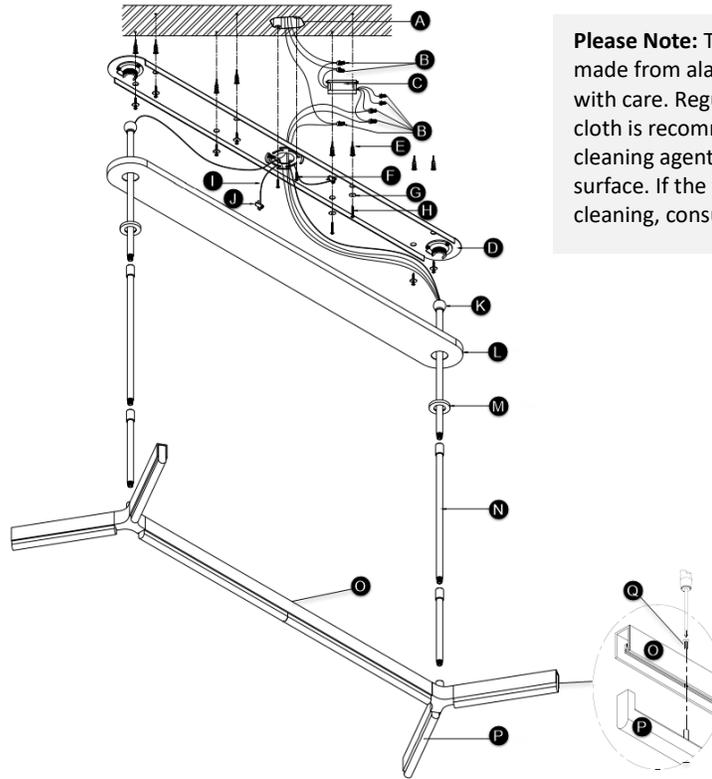

Please Note: The LED portion of this fixture is made from alabaster and should be treated with care. Regular dusting with a soft, dry cloth is recommended. Water and harsh cleaning agents can damage the material's surface. If the fixture requires more intensive cleaning, consult a professional.

Please Note: It is best to have a second person assist with the installation steps described below.

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into.
3. Determine the desired fixture height and complete the stem assemblies to suit by screwing the stems together. Ensure that both completed stems are equal in length.
4. Feed the fixture wires through one of the assembled stems and screw it on the top of the fixture.
5. Then feed the safety cable through another assembled stems and screw it on the top of the fixture .
6. Slide a collar nut (thread side up) onto each stem followed by the canopy.
7. Screw a half ball onto the top of each stem.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collar to the junction box using the #8-32 screws. Then slide the washers through the anchor screws and screw them into the anchors to secure the mounting plate directly to the ceiling.
4. Lift the assembled fixture up and slide the half balls onto the screw collar portions of the canopy. It is best to have a second person assist with this portion of the installation.
5. Pull the safety cable up and down through the mounting plate, feed it through cable grips, and secure it to the mounting plate by tightening the set screws.
6. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
7. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-/blue) fixture wire to negative (-) output driver wire
 - b) Positive (+/red) fixture wire to positive (+) output driver wire
8. Carefully tuck all the wires behind the mounting plate into the junction box.
9. Place the canopy onto the mounting plate with screw collars and secure it in place by screwing the collar nuts for each stem tightly onto it.
10. Remove the fixture screws from the alabaster. Lift the alabaster up to the fixture frame carefully, align the screw holes and secure it to the frame by tightening the fixture screws from the top of the frame.