


QUODDY 9, 16, 27, 37, 49 & 61 WALL SCONCES

SLOWS71527; SLOWS71627; SLOWS71727; SLOWS71827; SLOWS71927; SLOWS72027

General Product Information




Suggested/Required Tools

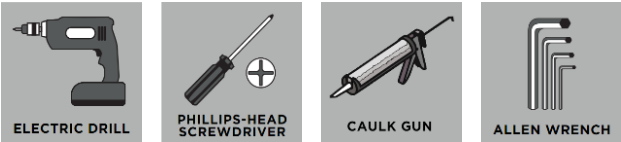

Safety Information



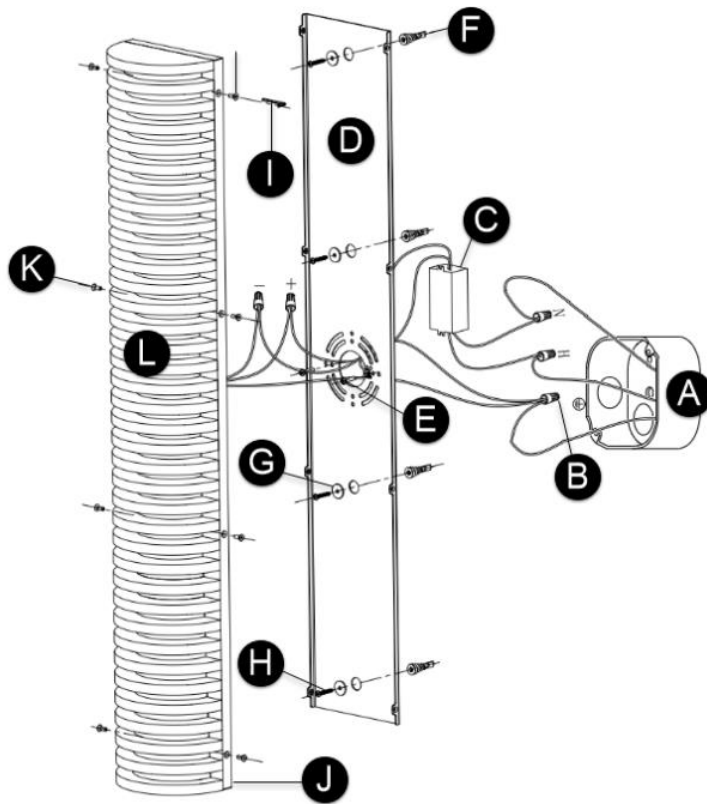

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Anchors
- G. Washers
- H. Anchor Screws
- I. Allen Wrench
- J. Fixture Backplate/Base
- K. Fixture Screws
- L. Fixture with LED Assembly

INSTRUCTIONS

I. Preparing for Installation

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Separate the mounting plate from the fixture's base/backplate by removing the by fixture screws using the provided Allen wrench.
3. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into before drilling them in.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Place the driver in the junction box, ensuring the output driver wires are accessible.
4. Secure the mounting plate to the junction box using the anchor screws. Slide the washers through the anchor screws and screw them into the anchors to secure the mounting plate directly to the junction box and wall.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to negative (-) output driver wire
 - b) Positive (+) fixture wire to positive (+) output driver wire
8. Carefully all the wires behind the mounting plate into the junction box.
9. Place the fixture backplate/base onto the mounting plate and secure it in place with the fixture screws and the Allen wrench to finish.
10. For wet locations, caulk around the fixture base with a waterproof construction sealant to finish installation.