




SAUCER DIRECT 18 & 24 PENDANTS

AKPD682; AKPD683

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Drivers
- D. Mounting Plate with Screw Collar & Mounting Screws (Not Illustrated)
- E. Half Ball
- F. Canopy
- G. Canopy Cover
- H. Collar Nut
- I. Stem Assembly
- J. Fixture
- K. Fixture Shade with LED Assembly

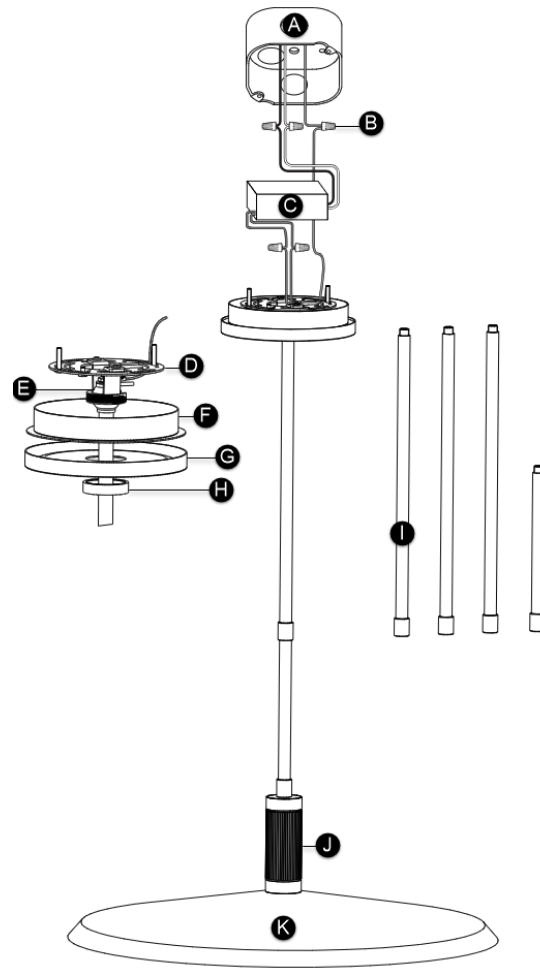

Please Note: It is best to have a second person assist with the installation steps described below.

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
3. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball.
4. Screw the stem assembly on top of the fixture. Then screw the half ball onto the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collar to the junction box using the mounting screws.
4. Slide the half ball assembly onto the screw collar portion of the mounting plate.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire
 - b) Positive (+) fixture wire to the positive (+) output driver wire
7. Carefully tuck all the wires behind the mounting plate into the junction box.
8. Mount the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
9. Install the shade and LED assembly onto the fixture to finish.