











CYMBAL LARGE SCONCE



PBWS35327

General Product Information











WARRANTY

FCC STATEMENT

Tools Required




Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

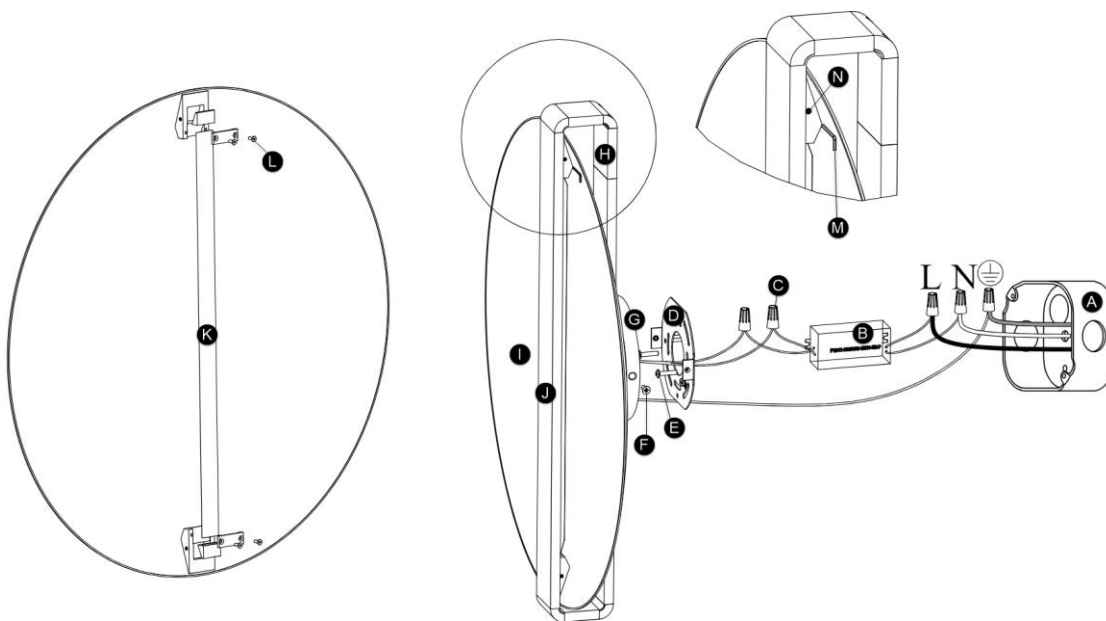
USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.





FIXTURE PARTS

- A. Junction box
- B. Driver
- C. Wire Nut Connections
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Screws
- G. Backplate
- H. Back Bracket
- I. Shade
- J. Front Bracket
- K. LED Crystal
- L. Shade Screws
- M. Allen Wrench
- N. Set Screws

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture body.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Attach the shade and front bracket to the LED crystal with the shade screws.
4. Using the Allen wrench to fasten the set screws, attach the front and back brackets together to secure the fixture.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black driver wire (output) to black fixture wire
 - b) Red driver wire (output) to red fixture wire
 - c) Black driver wire (input) to hot power line wire
 - d) White driver wire (input) to neutral power line wire
4. Carefully tuck all the wires and wire-nut connections into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place by installing the fixture screws.