

Inga Outdoor Wall**7000WINGA****1.0**

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:

This product is suitable for wet locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product can be dimmed with most ELV, TRIAC or 0-10V dimmers.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

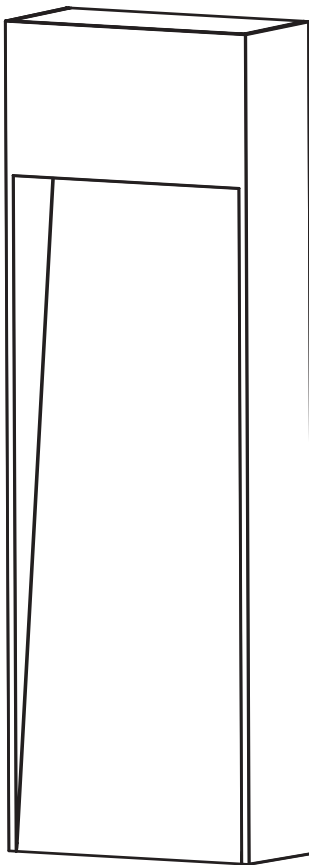SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

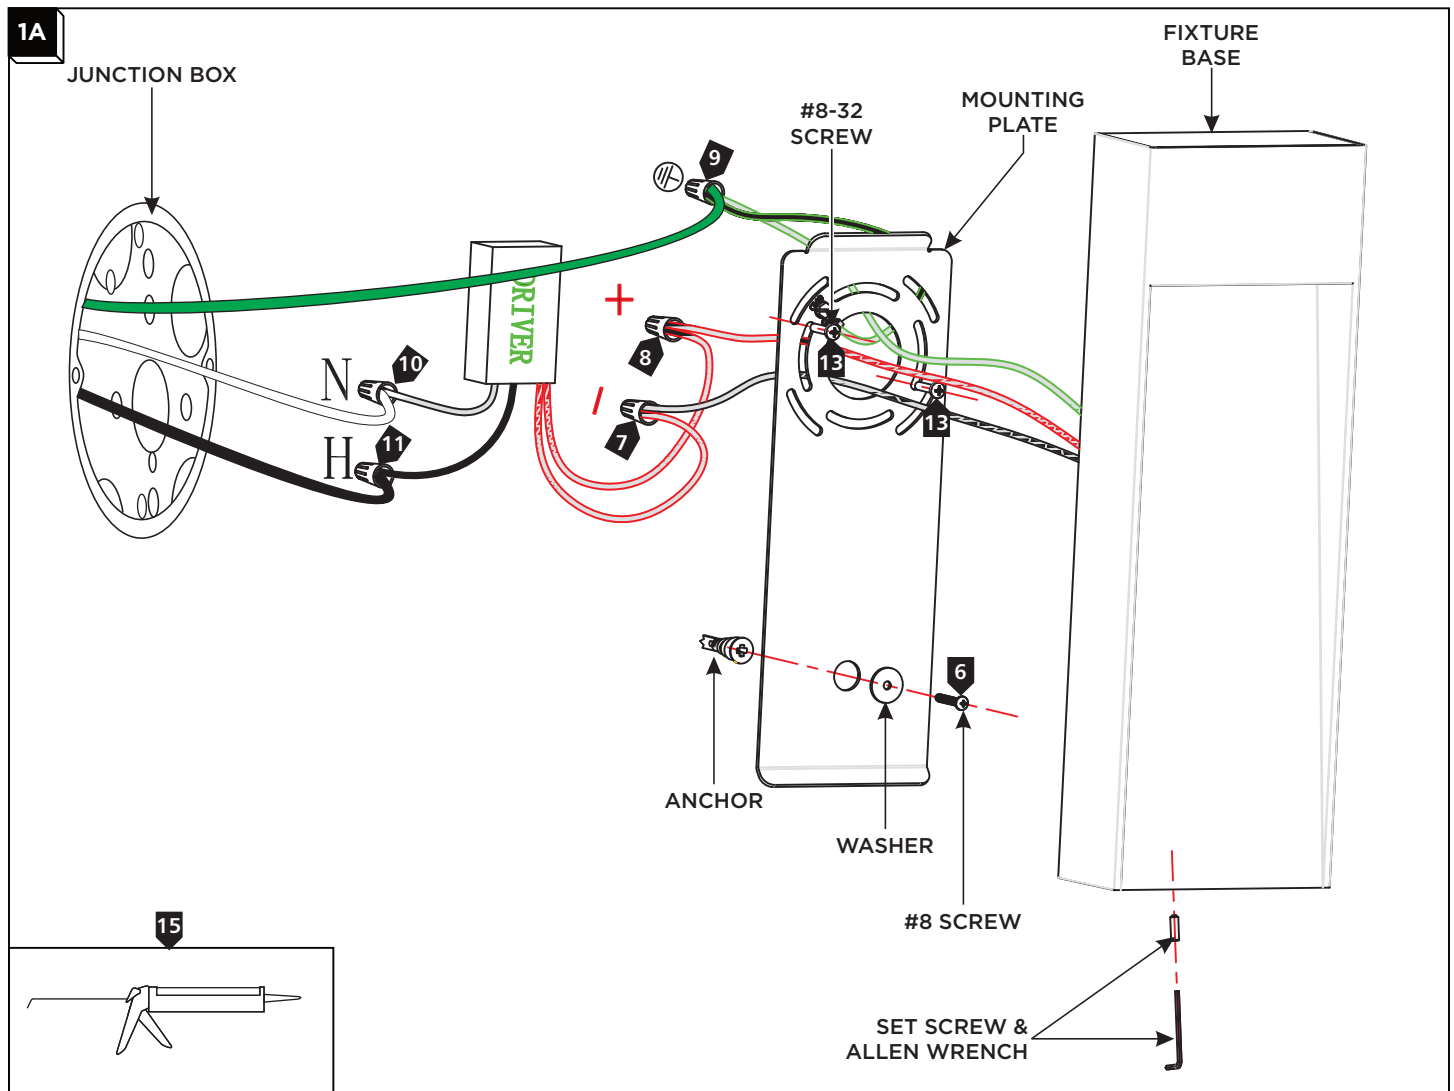

- 1 With the provided Allen wrench, remove the set screw on the fixture base.
- 2 Remove the mounting plate from the fixture base
- 3 Install the mounting plate to the junction box with the two #8-32 screws provided and ensure the mounting plate is level.
- 4 Line an anchor tip with the center of an anchor hole, and push the anchor into the wall up to the threads.
- 5 Screw the anchor in the rest of the way with a Phillips-head screwdriver.
- 6 Slide a #8 screw through a washer, and screw it into an anchor to secure the fixture base to the wall.
- 7 Connect the black/blue driver wire to the black/blue fixture wire with a wire nut.
- 8 Connect the red driver wire to the red fixture wire with a wire nut.
- 9 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 10 Connect the white driver wire to the neutral power line with a wire nut.
- 11 Connect the black driver wire to the hot power line with a wire nut.
- 12 For 277V Only: Connect the purple and gray wires to a compatible dimmer. If not using 0-10V dimming, cap off the purple and gray wires.
- 13 Properly place the driver, all wires, and wire nut connections into the junction box, and install the mounting plate to the junction box with the two #8-32 screws provided.
- 14 Mount the fixture base onto the mounting plate, and secure it in place by reinstalling the set screw using the provided Allen wrench.
- 15 **For Wet Locations**, caulk around the base of the fixture with waterproof construction sealant.