

Anton Small Wall**7000WANTN_9_ 1.0**

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:

This product is suitable for wet locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product can be dimmed with most ELV, TRIAC or 0-10V dimmers.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

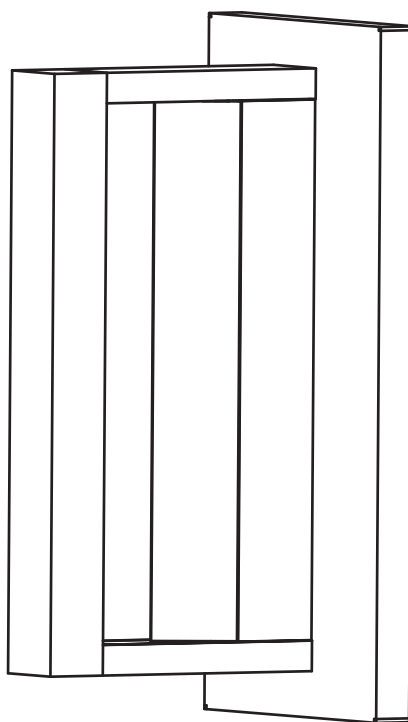SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

1A

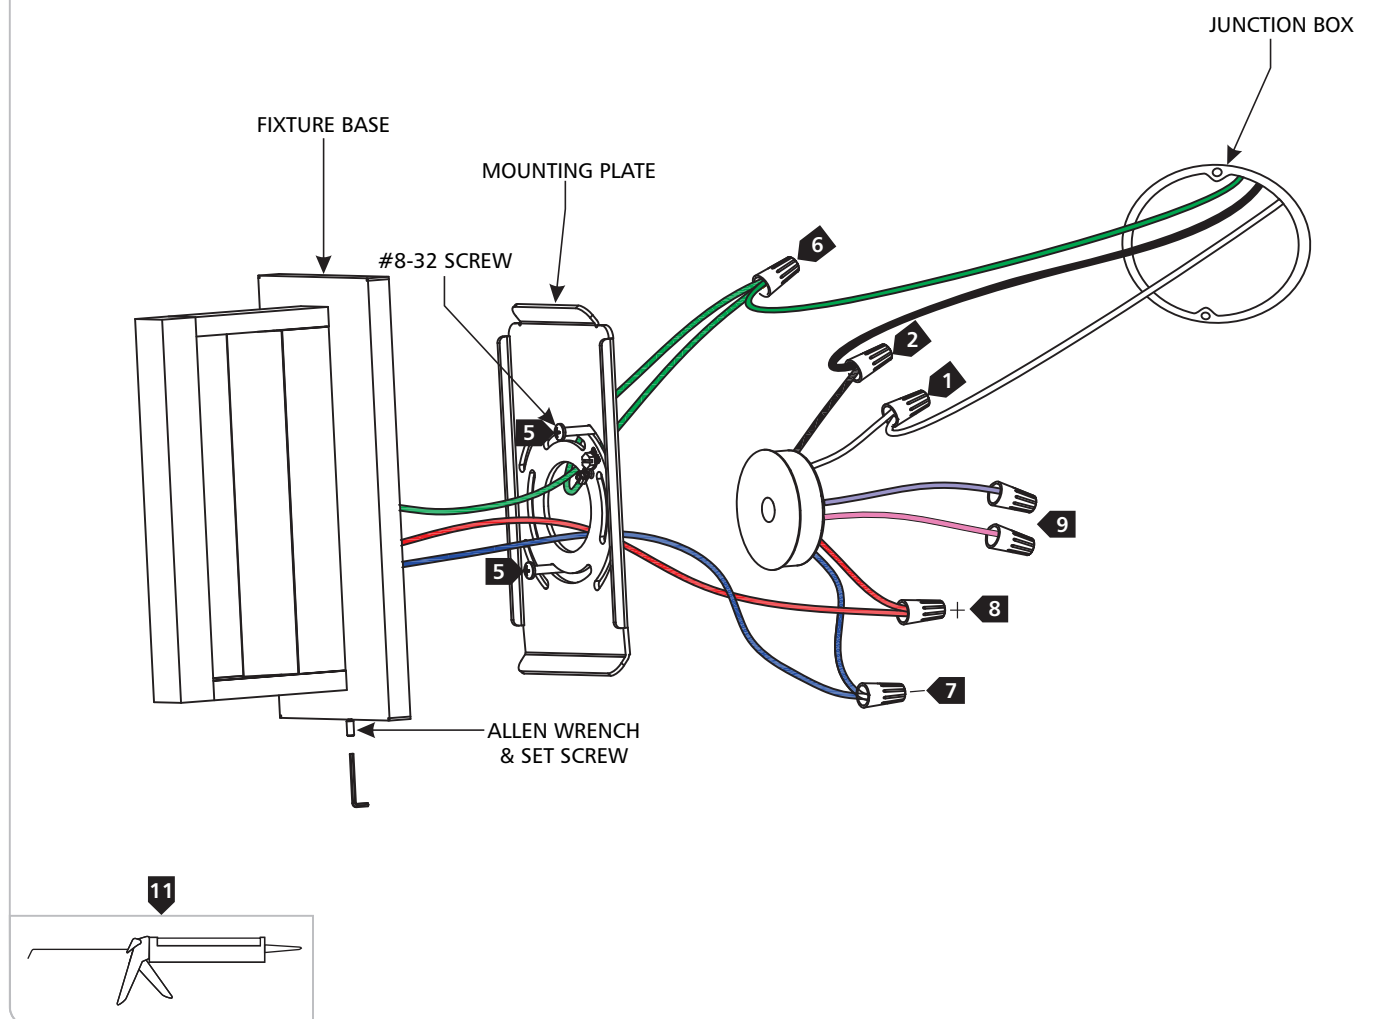

- 1 Connect the white input driver wire to the neutral power line with a wire nut.
- 2 Connect the black input driver wire to the hot power line with a wire nut.
- 3 With the provided Allen wrench, back out (do not remove) the set screw on the bottom of the fixture base.
- 4 Remove the mounting plate from the fixture base.
- 5 Place the driver into the junction box then install the mounting plate to the junction box with the two #8-32 screws provided, making sure the mounting plate is level and that driver output wires are accessible.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the blue negative (-) fixture wire to the blue negative (-) driver output wire with a wire nut.
- 8 Connect the red positive (+) fixture wire to the red positive (+) driver output wire with a wire nut.
- 9 Use the gray/pink and purple dimming wires for 0-10v dimming application (if not in use, make sure to cap these wires off).
- 10 Properly place all wires and wire nut connections into the junction box, mount the fixture base onto the mounting plate, and secure it in place by tightening the set screw using the provided Allen wrench.
- 11 For wet locations, caulk around the base of the fixture with waterproof construction sealant.