




HELIUM SMALL, MEDIUM, LARGE & X-LARGE 2-LIGHT CHANDELIERS

PBCH35827OPB; PBCH36227OPB; PBCH37027OPB; PBCH36627OPB

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.


Install and use this product in adherence with local electrical codes and regulations.

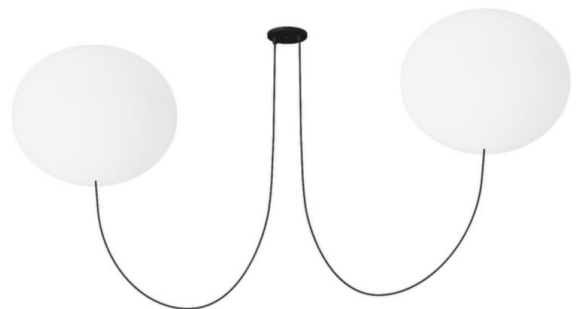

INSTRUCTIONS


I. Preparing the Fixture

1. Separate the mounting plate/bar (D) from the fixture body.
2. Secure the mounting plate/bar to the junction box, using a Philips-head screwdriver and the provided mounting screws (F).
3. Install the self-drilling anchors (J) for the LED/shade mount location using an electric drill.
4. Thread the washers (L) through the provided screws (M) and use them to secure the LED/shade mount to the anchor locations.
5. Determine the desired height of the fixture:
 - a) Feed the cord (I) with attached LED module (N) through the shade (Q), knurled nut (H), and canopy (G).
 - b) Ensure the cord is long enough to extend with a curved shape to the hanging cord to the location where the LED/Shade mount (K) will attach.
 - c) Use a wire cutter/shears or scissors to cut the excess cord.
 - d) Secure the primary and secondary strain reliefs (B) with the set screws (C).

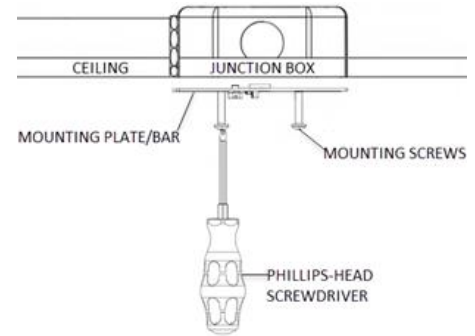

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw (E) on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut (A) to secure a connection:
 - a) Hot (black) driver wire to hot power line wire
 - b) Neutral (white) driver wire to neutral power line wire
5. Place all the wire into the canopy/junction box.

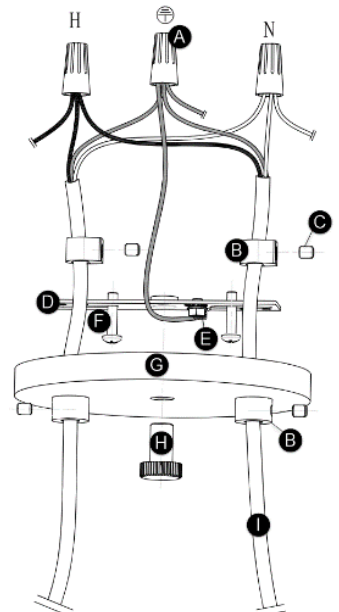

III. Installing the Fixture

1. While supporting the shade with the LED module, lift and push the canopy into place against the mounting plate on the ceiling and secure it by tightening the knurled nut.
2. Next, align the LED module to the LED/shade mount.
3. Use the Allen wrench (P) to secure the LED module to the LED/shade mount with the fixture screws (O).
4. To finish, screw on the shade to the LED module secured to the ceiling.

