

Visual Comfort and Company

TEST REPORT

SCOPE OF WORK

LM-79 testing report

REPORT NUMBER

221205125GZU-009

ISSUE DATE

29 January 2023

REVISION DATE

None

NUMBER OF PAGES

13

DOCUMENT CONTROL NUMBER

Report format for LM-79:2008_F

© 2021 INTERTEK



TEST REPORT

TEST OF ONE LED LUMINAIRE

MODEL NO. 700OWSQGEW92717BUNV

RENDERED TO

Visual Comfort and Company

Contact Name: Tess Gallagher

7400 LINDER AVE. SKOKIE, IL, 60077

Email: Tgallagher@visualcomfortco.com
Phone No.: 8474104774

TEST: Electrical and Photometric as required to the IES LM-79 test standard.

STATEMENT OF LIMITATION: The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

AUTHORIZATION: The testing performed was authorized by signed quote number: QGZ221129088.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IES LM-79: 2008 Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI C78.377:2017 Specifications of the Chromaticity of Solid State Lighting Products

DESCRIPTION OF SAMPLE: The client submitted one sample of model 700OWSQGEW92717BUNV. The sample was received, in undamaged condition. The sample designation was S221205125-009.

DATES OF TESTS: 13 January 2023

ISSUED BY: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

TEST LOCATION: Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China

***** End of Page *****

TEST REPORT

SUMMARY

Model Number:	700OWSQGEW92717BUNV
Description:	LED Luminaries
Brand Name:	--

Test Condition: 120V, 60Hz For 700OWSQGEW92717BUNV

Criteria	Result
Total Lumen Output	432.9 lm
Total Power	19.3 W
Luminaire Efficacy	22.4 lm/W
S/MH(C0/180)	22.47
S/MH(C90/270)	1.90
Correlated Color Temperature (CCT)	2688 K
Color Rendering Index (CRI)	94
R9	67
Chromaticity Coordinate (x)	0.4612
Chromaticity Coordinate (y)	0.4115
Chromaticity Coordinate (u')	0.2630
Chromaticity Coordinate (v')	0.5279

Remark:

Measurement uncertainty for applicable tests has been established.

***** End of Page *****

TEST REPORT

EQUIPMENT LIST

Equipment Used	Model Number	Control Number
Goniophotometer System	Go-R5000	SA063-16
KONICA MINOLTA - Illuminance meter	CX-2B_WL	SA063-16-01
Standard Lamp	D215S	SA063-16-06
Digital Power Meter	PLM3000	SA063-16-09
AC power source for Goniophotometer	PCR-1000WH	SA063-16-10
Temperature Meter	RC-HT601A	SA047-62

GENERAL REMARK

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

When determining for test conclusion, measurement uncertainty of tests has been considered.

Throughout this report a comma point is used as the decimal separator.

***** End of Page *****

TEST REPORT

TEST METHOD

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IES LM-79

Light Distribution and Output Measurements

Light Distribution and total light output (luminous flux) were measured using a Go-R5000 Type-C Rotating Mirror Goniophotometer. Temperature 25°C and relative humidity of 60% was measured at a position in the testing laboratory.

The lamp rotates only around the fixed vertical axle in the prescribed burning position. The lamp and mirror permit the measurement of luminous intensity at the direction of any horizontal or vertical angle without tilting the lamp. The lamp was allowed to stabilize before measurements were made.

Chromaticity Measurements

Chromaticity was measured using a 2 meters integrating sphere spectral lamp measurement system, 4 π geometry, with an interior coating reflectance no less than 95 %. Temperature was measured at a position inside the sphere shielded from direct light. Relative humidity of 65% was measured at a position in the testing laboratory.

Spectral radiant flux measurements were made using spectroradiometer attached to the detector port of the integrating sphere. Each lamp was allowed to stabilise before measurements were made. The calibration of the integrating sphere spectroradiometer system is by the reference/standard lamps which are traceable to National Institute of Metrology P.R. CHINA. Lamp efficacy (lumens per watt) for each lamp model was then computed based on the luminous flux result. Electrical measurements including voltage, power and power factor were measured using EVERFINE - Digital Power Meter., model PLM3000.

Correction factor (self-absorption) has been considered when doing measurement.

Standard lamp used for Goniophotometer method:

Model: D215S
Current: 4.809A

Standard lamp used for integrating sphere:

Model: S82134
Current: 1.830

***** End of Page *****


TEST REPORT

RESULTS OF TESTS

Test Condition: 120V, 60Hz For 700OWSQGEW92717BUNV

Spectral Distribution over Visible Wavelengths

nm	mW/nm								
380	0.0004	480	0.0001	580	0.0004	680	0.0003	780	0.0000
385	0.0002	485	0.0001	585	0.0004	685	0.0003		
390	0.0000	490	0.0001	590	0.0004	690	0.0002		
395	0.0000	495	0.0002	595	0.0004	695	0.0002		
400	0.0001	500	0.0002	600	0.0004	700	0.0002		
405	0.0001	505	0.0002	605	0.0005	705	0.0002		
410	0.0000	510	0.0002	610	0.0005	710	0.0002		
415	0.0000	515	0.0002	615	0.0005	715	0.0001		
420	0.0000	520	0.0002	620	0.0005	720	0.0001		
425	0.0000	525	0.0002	625	0.0005	725	0.0001		
430	0.0000	530	0.0002	630	0.0005	730	0.0001		
435	0.0000	535	0.0003	635	0.0005	735	0.0001		
440	0.0000	540	0.0003	640	0.0005	740	0.0001		
445	0.0001	545	0.0003	645	0.0004	745	0.0001		
450	0.0001	550	0.0003	650	0.0004	750	0.0001		
455	0.0001	555	0.0003	655	0.0004	755	0.0001		
460	0.0001	560	0.0003	660	0.0004	760	0.0001		
465	0.0001	565	0.0003	665	0.0004	765	0.0000		
470	0.0001	570	0.0003	670	0.0004	770	0.0000		
475	0.0001	575	0.0004	675	0.0003	775	0.0000		

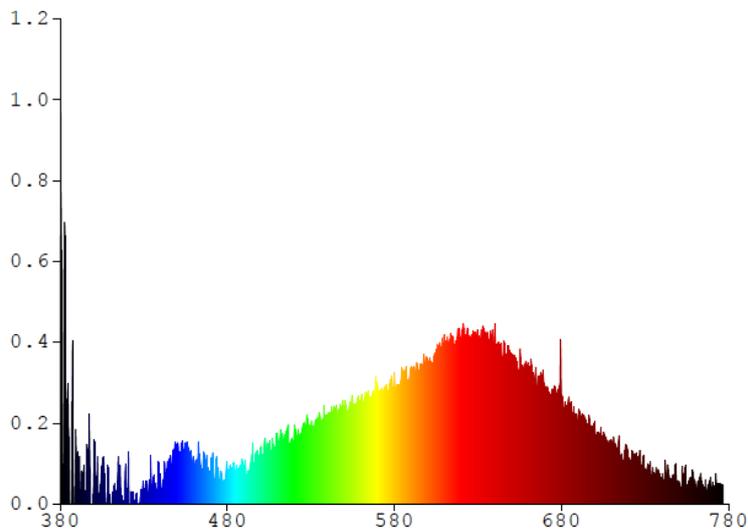

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700WSQGEW92717BUNV

Total operation burning time: 60 minutes

Stabilization time: 45 minutes


Photometric Measurements at 25°C – Integrating Sphere Method

Intertek Sample No.	Base Orientation	Correlated Color Temperature (K)	CRI	R9	CIE 31'	CIE 31'	CIE 76'	CIE 76'
					Chromaticity Coordinate (x)	Chromaticity Coordinate (y)	Chromaticity Coordinate (u')	Chromaticity Coordinate (v')
700WSQGEW92717BUNV								
S2212051 25-009	--	2688	94	67	0.4612	0.4115	0.2630	0.5279

Photometric and Electrical Measurements at 25°C – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
700WSQGEW92717BUNV							
S2212051 25-009	--	120.3	164.9	19.3	0.975	432.9	22.4

Intensity (Candlepower) Summary at 25°C – Candelas

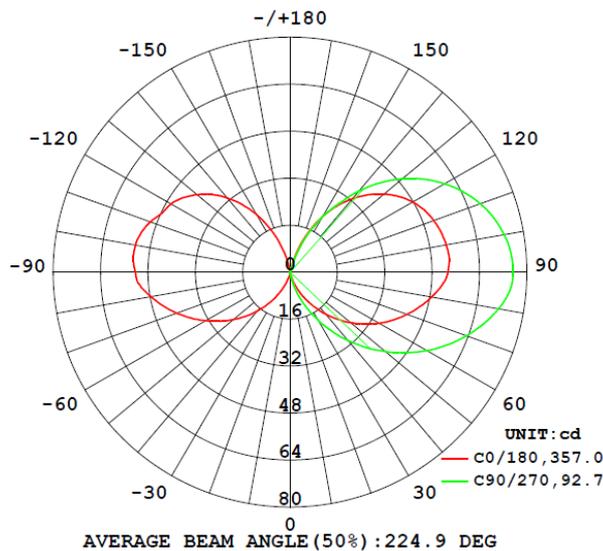

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700OWSQGEW92717BUNV

Intensity (Candlepower) Summary at 25°C - Candelas

V \ H(°)	0	22.5	45	67.5	90
0	0.1	0.1	0.1	0.1	0.1
5	0.1	0.1	0.2	0.2	0.2
10	0.2	0.2	0.3	1.2	1.5
15	1.4	1.1	2.0	3.8	4.5
20	4.0	3.7	5.1	7.5	8.5
25	7.1	7.5	9.6	12.2	13.4
30	10.7	12.0	15.2	17.7	18.8
35	14.6	17.2	21.7	24.0	24.5
40	18.6	22.8	28.8	30.7	30.3
45	22.7	28.8	36.3	37.7	36.2
50	26.8	35.1	44.1	45.1	42.1
55	30.8	41.6	51.9	52.5	47.9
60	34.7	48.0	59.8	59.9	53.4
65	38.5	54.4	67.4	67.1	58.6
70	42.1	60.6	74.8	74.0	63.4
75	45.4	66.3	81.6	80.5	67.7
80	48.6	71.6	87.8	86.3	71.5
85	51.5	76.4	93.1	91.0	74.4
90	53.3	78.7	94.8	92.3	75.3
95	53.9	78.3	94.0	91.6	74.9
100	53.6	76.5	91.9	89.6	73.5
105	52.8	73.6	88.5	86.3	71.3
110	51.6	69.9	84.1	82.0	68.3
115	50.1	65.4	78.7	76.7	64.7
120	47.8	60.1	72.5	70.6	60.3
125	45.0	54.2	65.5	63.6	55.3
130	41.5	47.7	57.7	56.0	49.6
135	37.4	40.6	49.2	47.7	43.1
140	32.7	33.3	40.2	38.9	36.1
145	27.4	26.3	30.7	29.7	28.5
150	21.8	19.9	20.8	20.3	21.7
155	15.7	13.8	10.9	12.3	14.3
160	9.5	7.9	2.7	4.8	6.9
165	3.4	2.0	0.2	0.2	0.2
170	0.1	0.1	0.1	0.0	0.0
175	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0

***** End of Page *****

TEST REPORT RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700WSQGEW92717BUNV

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens (lm)	% Luminaire (%)
700WSQGEW92717BUNV		
0-30	3.5	0.8
0-40	12.0	2.8
0-60	56.2	13.0
0-90	201.0	46.4
60-90	144.8	33.4
0-180	432.9	100.0

Beam Angle


Total Beam Angle (°)
224.9

Illumination Plots

Model No.: 700WSQGEW92717BUNV

Mount Height: 2.5 m

Illuminance - Cone of Light

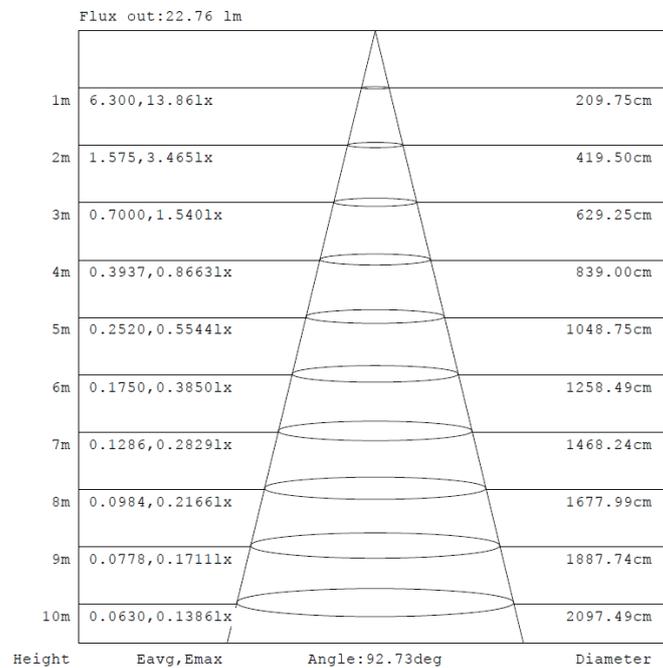


***** End of Page *****

TEST REPORT
RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700OWSQGEW92717BUNV

Model No.: 700OWSQGEW92717BUNV
Mount Height: 2.5 m
Isoillumination Plot

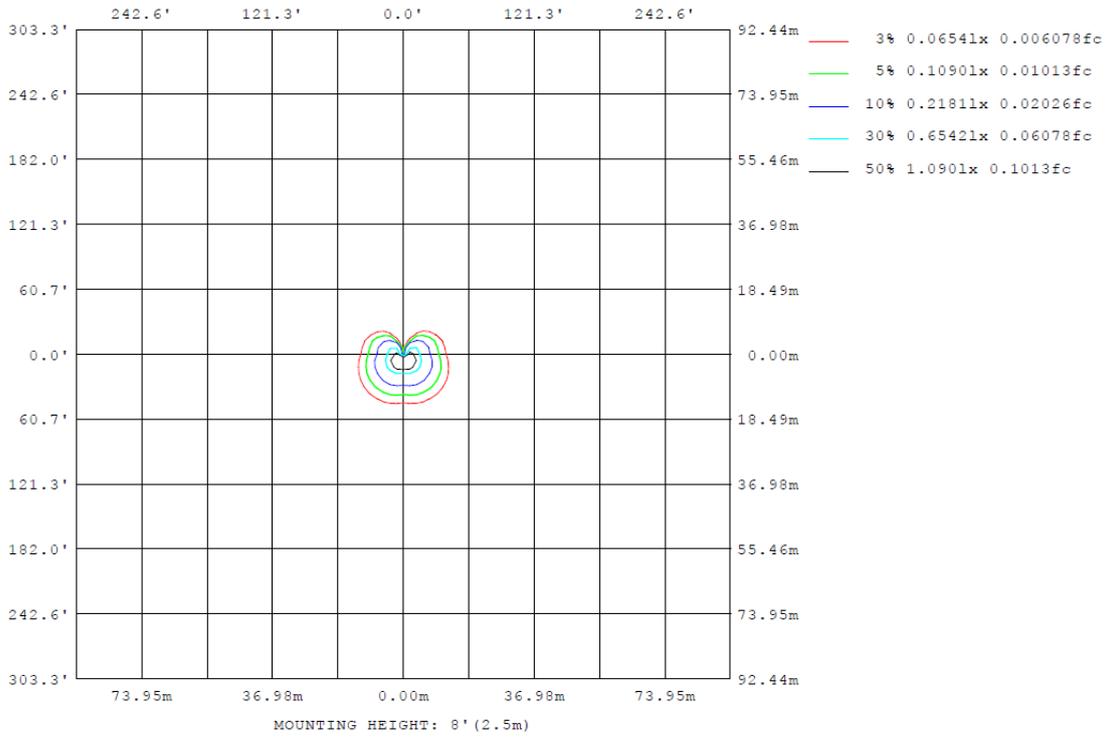

***** End of Page *****

TEST REPORT







RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700WSQGEW92717BUNV

ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD
Date: 2023/1/13

Manufacturer: Visual Comfort and Company
Model: 700WSQGEW92717BUNV

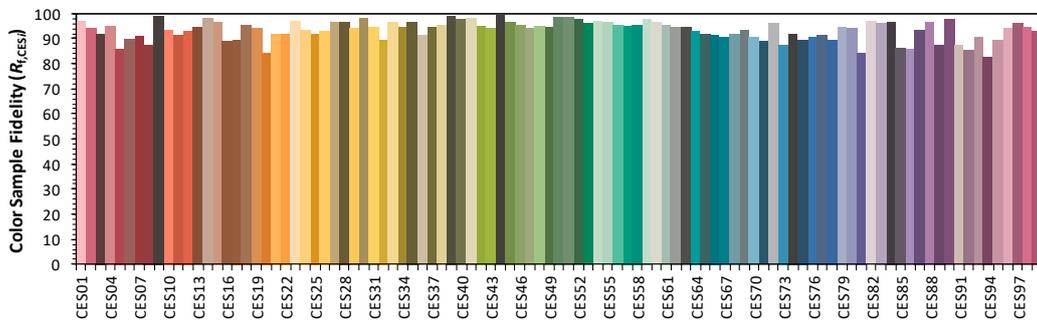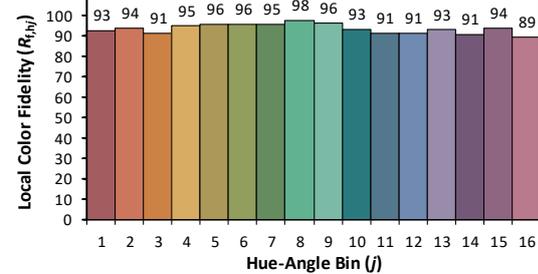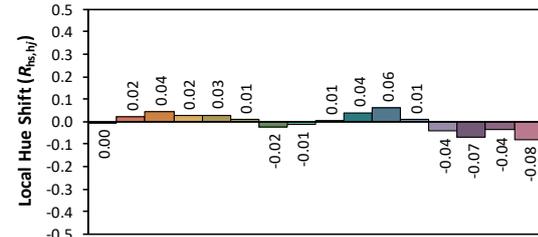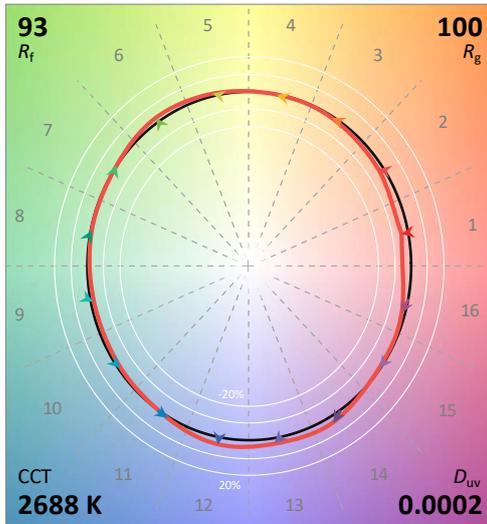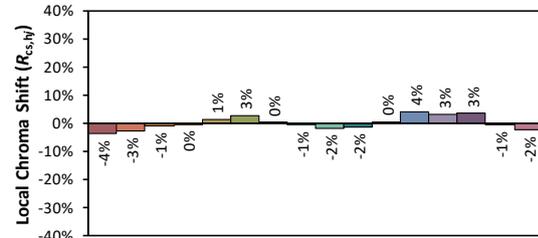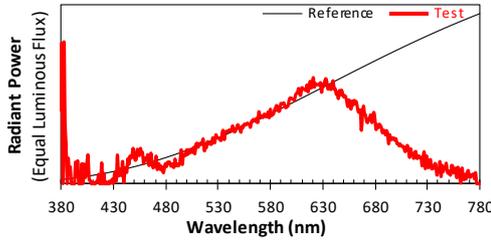

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4612
 y 0.4115
 u' 0.2630
 v' 0.5279


CIE 13.3-1995 (CRI)	
R_a	94
R_g	67

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

***** End of Page *****

TEST REPORT

PRODUCT PICTURE (not to scale)

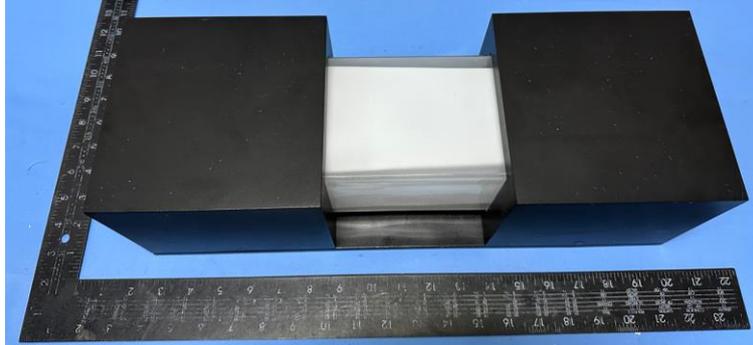

External view of 7000WSQGEW92717BUNV




View of LED Driver ISDU-D56-20W

***** End of Page *****

TEST REPORT

PRODUCT PICTURE (not to scale)

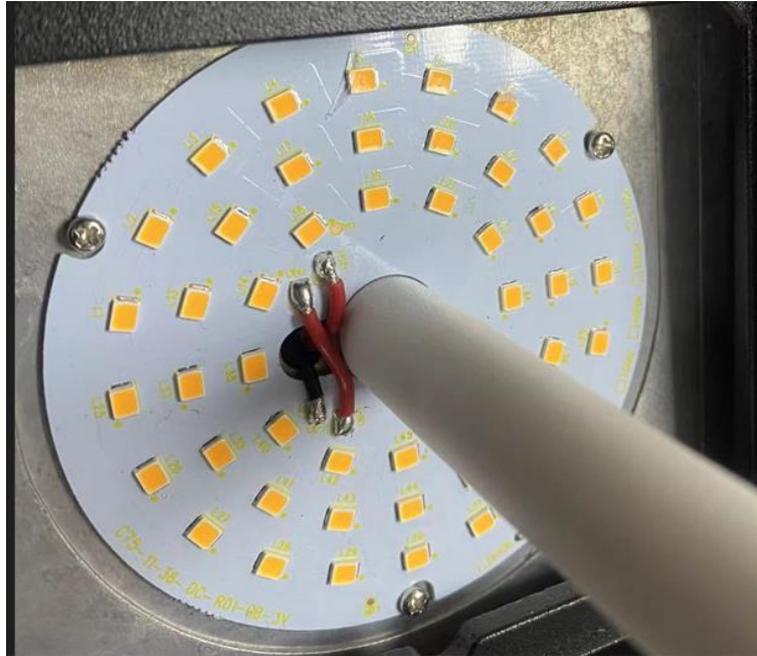

View of LED

In Charge Of Tests:

Done Ye

Done Ye
Engineer

Report Reviewed By

Shelley Ying

Shelley Ying
Reviewer

Attachment: None

***** End of Report *****