



FIELLE LARGE SCONCE

KWWS21727


General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




HORIZONTAL OR VERTICAL INSTALL




DIMMER COMPATIBLE




INTEGRATED LED NO BULBS REQUIRED




PLEASE SEE visualcomfort.com FOR PRODUCT SPECS




CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




WARRANTY




FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER




ALLEN WRENCH

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



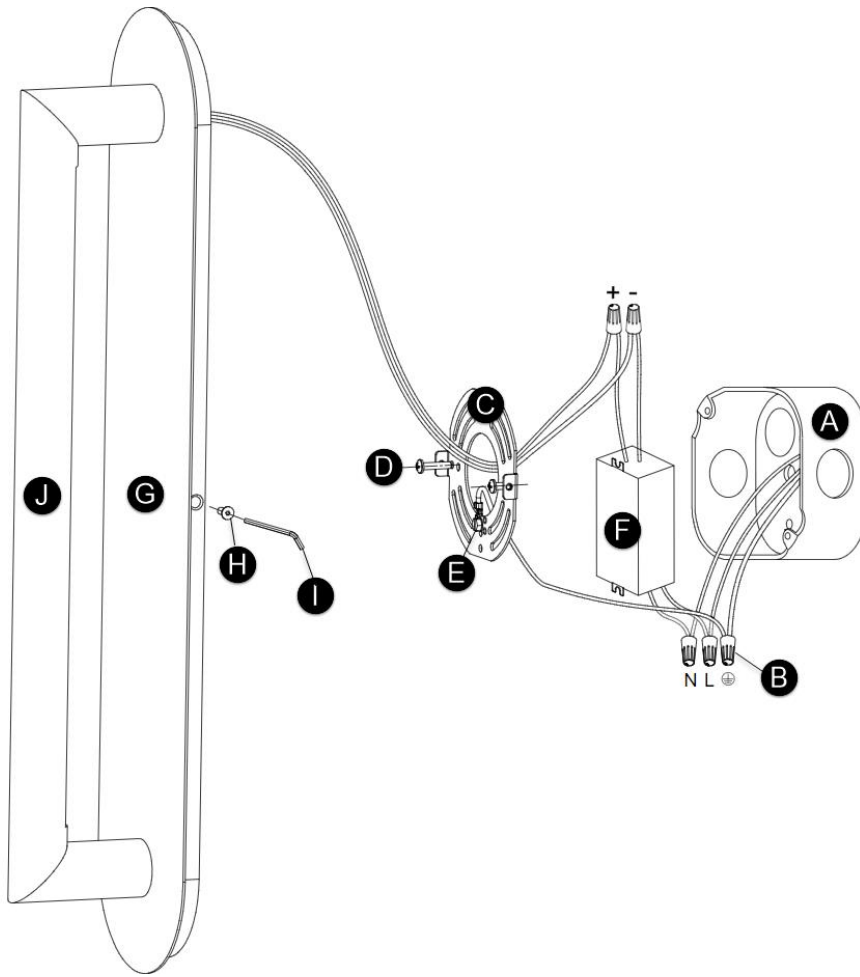

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Ground Screw
- F. Driver
- G. Fixture Backplate
- H. Fixture Screws
- I. Allen Wrench
- J. LED

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture backplate.
2. Install the mounting plate to the junction box and secure it using the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck the driver and all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place by installing the fixture screws.