


# ALO EXTRA-LARGE WALL SCONCE

AKWS15927

## General Product Information

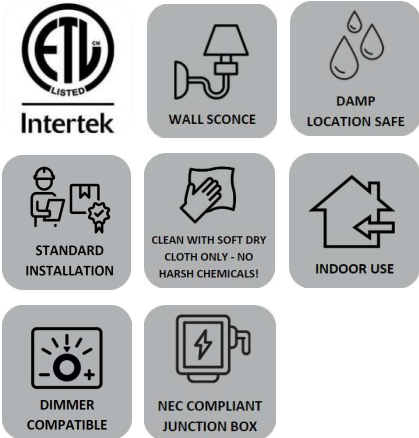

## Safety Information

**SAVE THESE INSTRUCTIONS!**

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



**Turn off electrical current at the source before working with any lighting fixture or portable lamp.**

**Install and use this product in adherence with local electrical codes and regulations.**



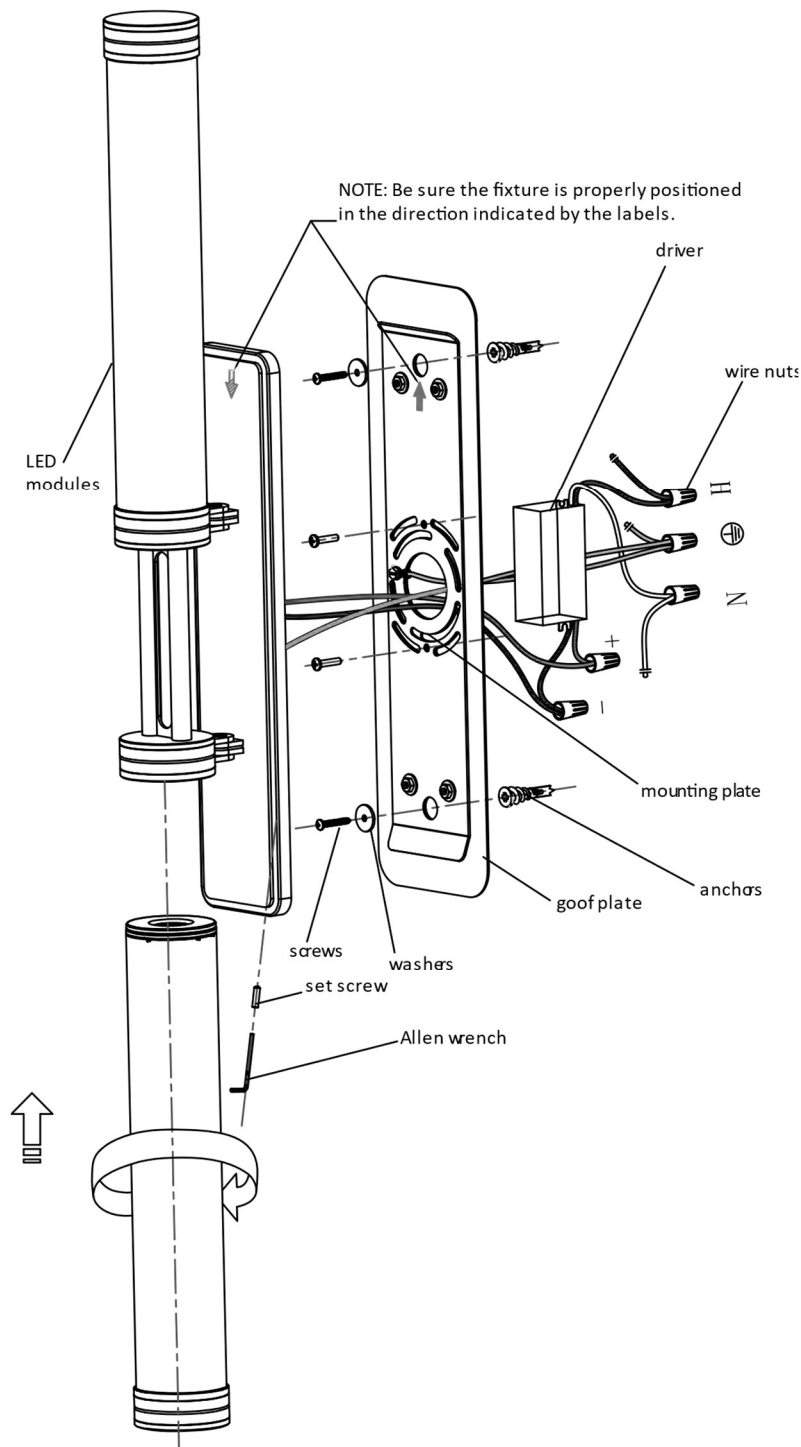

## INSTRUCTIONS

### I. Preparing the Fixture

1. Choose to install with or without the goof plate.
2. Remove the mounting plate from the fixture body.
3. Install the mounting plate to the junction box.

**Note:** The direction of the arrow on the junction box mounting plate should be aligned with the arrow inside the canopy.

## **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut the power supply to the relevant circuits, ensuring there is no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Negative (-) fixture wire to the negative (-) output driver wire (negative to negative)
  - b) Positive (+) fixture wire to the positive (+) output driver wire (positive to positive)
  - c) Hot driver input wire (black) and hot power line wire from the junction box (hot to hot)
  - d) Neutral driver input wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if you are not using a dimmer.
5. Carefully tuck the driver and all the wires into the junction box.

## **III. Installing the Fixture**

1. Hook the fixture to the mounting plate, securing it with the set screws.
2. Thread the glass modules onto the fixture hubs, then the integrated electrical connector will make contact once assembly is complete.
3. Thread the decorative end-caps onto the other end of module.
4. Turn on the power.