


DOLA 6, 10, & 13 FLUSH MOUNTS

MDFM738; MDFM740; MDFM739

General Product Information



Tools Required/Suggested

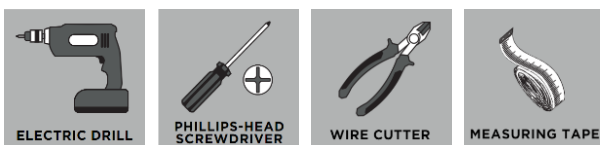

Safety Information

CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.





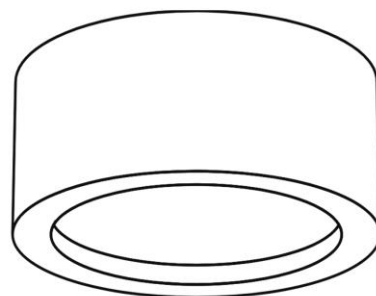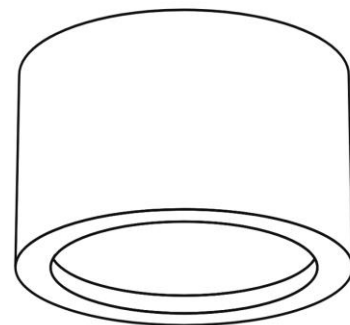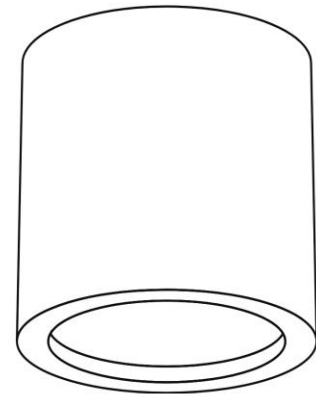


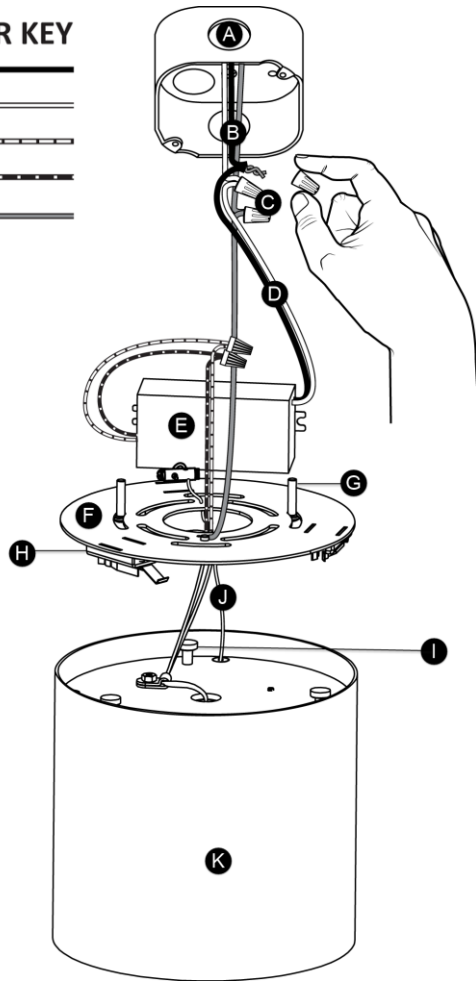
Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



WIRE COLOR KEY

HOT BLACK	
NEUTRAL WHITE	
DRIVER BLUE	
DRIVER RED	
GROUND GREEN	



FIXTURE PARTS

- A. Junction box
- B. Powerline Wires
- C. Wire Nut Connections
- D. Fixture/Driver Wires
- E. Driver
- F. Mounting Plate
- G. Mounting Screws
- H. Spring Clips
- I. Fixture Pegs
- J. Safety Cable
- K. Fixture
- L. Anchors & Anchor Screws
(Not Illustrated; Dola10 & 13 Only)

INSTRUCTIONS

I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging.
2. Separate the mounting plate from the fixture by turning the mounting plate counterclockwise until it detaches.
3. Dola10 & 13 Only: Align the mounting plate with the junction box and mark the anchor positions. Drill holes at the marked points using a drill bit slightly smaller than the provided anchors. Insert the anchors into the holes and drive them in using a screwdriver.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Twist the bare ends of the following pairs of driver and power line wires together with a wire nut to secure a connection:
 - a) White driver input wire to neutral power line wire
 - b) Black driver input wire to hot power line wire
3. Place the driver in the junction box.
4. Loop and secure the safety cable over a stable structure that agrees with local building codes.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation)
6. Connect the following pairs of wires using wire nuts (skip this step if the wires come pre-connected out of the package):
 - a) Negative (-/blue) fixture wire to negative (-) output driver wire
 - b) Positive (+/red) fixture wire to positive (+) output driver wire
7. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Secure the mounting plate to the junction box using the provided mounting screws.
2. Align the pegs on the base of the fixture with the spring clips on the mounting plate.
3. Secure the pegs into the spring clips to fasten the fixture to the junction box. Then rotate the fixture clockwise to lock it in place.
4. Power the fixture on to test its functioning.