



## MIDRAND & MIDRAND CRYSTAL 15, 26, & 36 VANITIES

SLBA790; SLBA759; SLBA789; SLBA758; SLBA791; SLBA760

### General Product Information



### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.





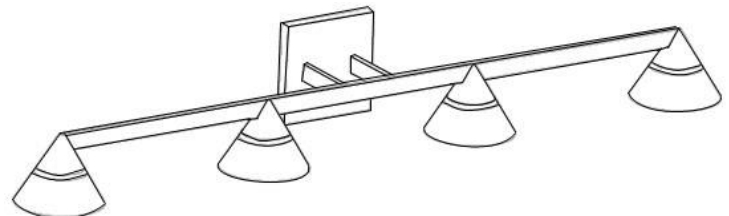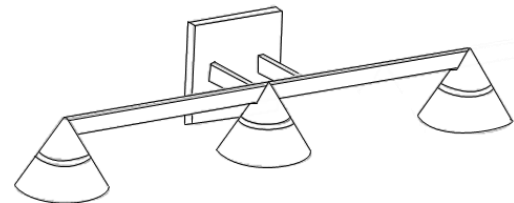


Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.




## FIXTURE PARTS

### WIRE COLOR KEY

HOT BLACK	
NEUTRAL WHITE	
DRIVER BLUE	
DRIVER RED	
GROUND GREEN	

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Set Screw
- G. Allen Wrench
- H. Fixture/Fixture Base
- I. Shade(s)
- J. LED(s)

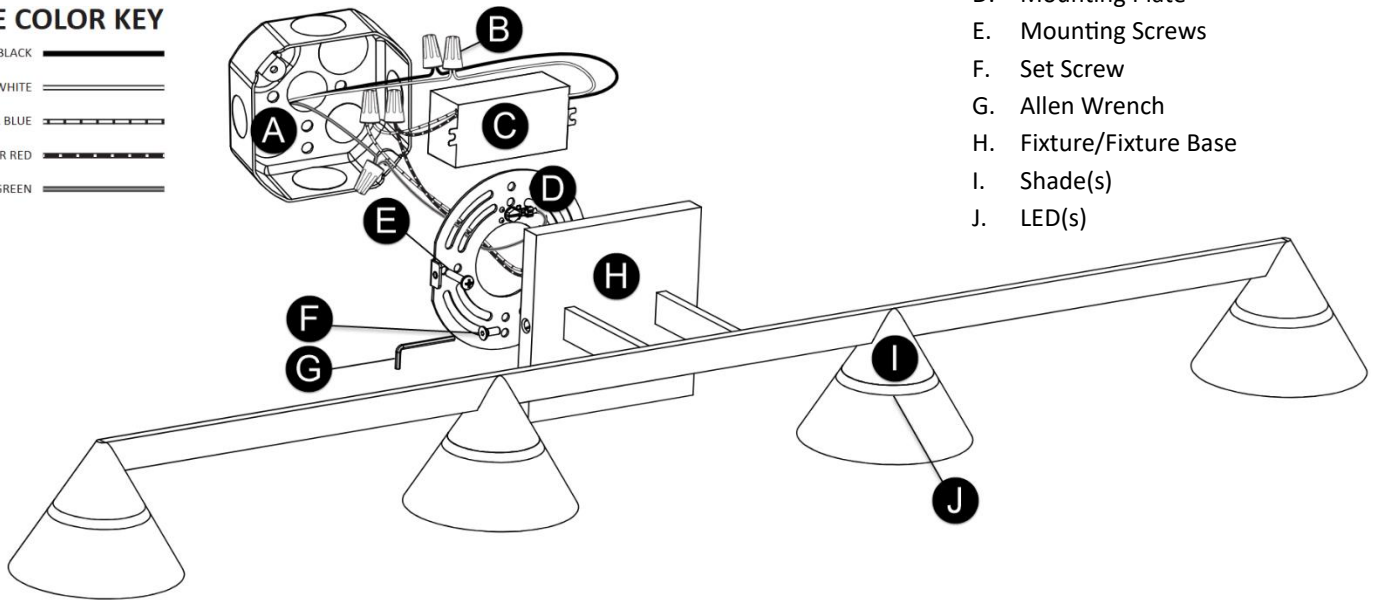

## INSTRUCTIONS

### I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. For Midrand Crystal versions, handle the crystal components with care to avoid damage.
2. Separate the mounting plate from the fixture's base or backplate.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and turn it off to cut power to the relevant circuits. Ensure there is no electricity running through the wiring before proceeding.
2. Twist the bare ends of the following pairs of driver and power line wires together with a wire nut to secure a connection:
  - a) White driver input wire to the neutral power line wire
  - b) Black driver input wire to the hot power line wire
3. Place the driver inside the junction box.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Next, connect the following pairs of wires together using a wire nut:
  - a) Black fixture wire to black driver output wire
  - b) Red fixture wire to red driver output wire
6. For 0-10V dimming capability, connect the purple and pink wires to a compatible dimmer. If dimming is not required, cap off these wires individually.
7. Carefully tuck all wires into the junction box or fixture base.

### III. Installing the Fixture

1. Attach the mounting plate to the junction box using the provided mounting screws.
2. Mount the fixture onto the installed mounting plate and secure it by tightening the set screw with the provided Allen wrench.
3. For damp locations, caulk around the base of the fixture with waterproof construction sealant.