

INSTALLATION INSTRUCTIONS

Model# 71266-66/ 71266-66-C

READ AND SAVE THESE INSTRUCTIONS


WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Separate base cup (C) by loosening screws (D, 4pcs).
4. Connect electrical wires while supporting the lantern with connectors (E). If your post (A) (not supplied) has a ground wire (green or bare copper), connect fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside base cup (C). Align base cup (C) with post (A) and secure with mounting screws (B). (Fig. 1 & 2)
5. Install (4) four candelabra base bulbs (I) up to 40 Watts, or CFL or LED equivalent (not included), in accordance with the fixture specification.
(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA)
6. Attach frame (F) onto base cup (C) by using screws (D, 4pcs).
7. To replace glass, remove gaskets (M, 8pcs) and loosen screws (L, 8pcs) to remove lower cover (K). Insert the new glass (J) into fixture frame from the bottom. Secure lower cover (K) by threading screws (L, 8pcs) until tight and reinstall gaskets (M, 8pcs) on the lower cover (K).
8. This fixture is ETL listed for wet location applications.


Your installation is now complete. Return power to the outlet box and test the fixture.



“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION - RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.

Fig. 1

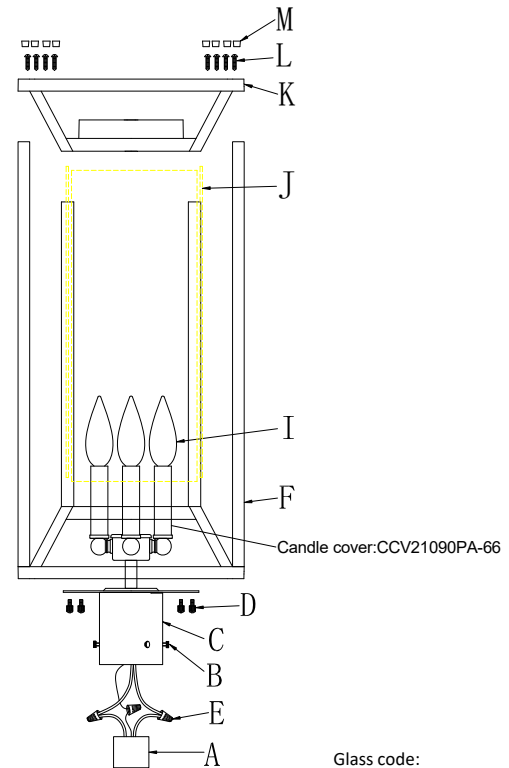

Glass code:
71266-66: G71263
71266-66-C: G71263-C

Fig. 2

