

INSTALLATION INSTRUCTIONS

For Model 78304-734

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Place lock washer (E) over all thread (G), attached to crossbar (C), and thread hex nut (F) onto all thread (G) until tight. The length of all thread may be adjusted if necessary. Take the crossbar assembly and mount to outlet box (A) (not included) using outlet box screws (D). Tighten screws securely with screwdriver (not included). The side of the crossbar marked "GND" must face out.
4. Use a pair of chain pliers to open one link of the chain and connect to the fixture loop (S), then close the link. By measuring, determine correct number of links needed for proper hanging height. Using chain pliers disconnect and discard remaining chain.
5. Lace the fixture wires through the chain. Slip lock collar (K) over the chain followed by the canopy (I). Open the other last link of chain and attach to the loop (J) at the ceiling, then close the link. Feed the fixture wires through the loop (J) and all thread (G) and pull until taut.

CONNECTING THE WIRES (Fig. 2)


6. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box (A) has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar (C) using green screw provided.
7. Finally thread lock collar (K) to loop (J) and secure the canopy (I) to ceiling.
8. Install (3) three candelabra base bulbs (H) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Fig. 1

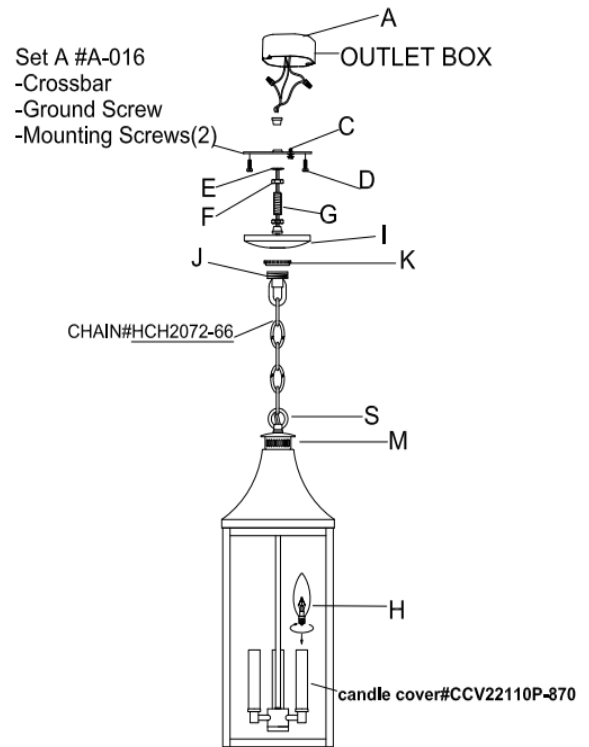

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 2

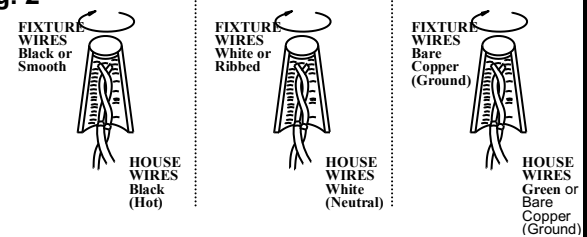

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

