

US FIRTH WALL LIGHT

tala®

SKU: FTH-WL-WHT-GX53-2000-3000K-01-US

FINISH: WHITE



FIXTURE - PHYSICAL

Total dimension:

L 3 1/8in x W 5 7/8in x H 5 7/8in

Cable length:

-

Materials:

Glass, Stainless Steel, Aluminium and Silicone

Finish:

White

Weight:

2.87lbs

IP rating:

IP65 - Wet Rated

Base:

GX53

FIXTURE - ELECTRICAL

Power:

7W

Voltage:

110-120V

Frequency:

50/60Hz

BULB

Bulb dimension:

W 2.95in x H 1.22in

Base type:

GX53

Materials:

Ceramic, polycarbonate, steel

Bulb cover finish:

Opal

Weight:

0.22 lbs

Max. working temp.:

65 °C

IP rating:

IP20

Power:

7W

Current:

0.06A

Voltage:

110-120V~

Frequency:

50/60Hz

Base:

GX53

ILLUMINATION PER BULB

CCT:

2000-3000K

Lumens:

730lm

Incand equiv:

55W

Flicker:

<5%

Beam angle:

120°

Light source:

LED

CRI:

95Ra

R9:


82

TM30-Rg:


100

TM30-Rf:

92.7

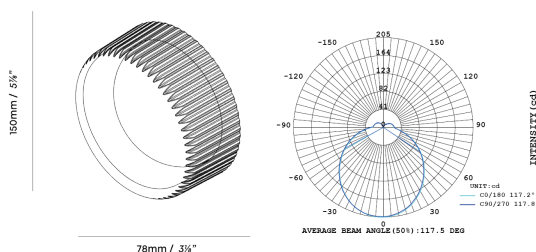

IES/LDT photometry files
and product photography
available on request

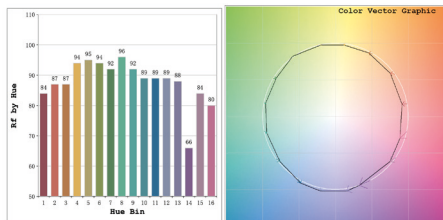

DIMMING

Dimmable 0-100%

Recommended dimmer: Tala Rotary Wall Dimmer
(For a full list of recommended and compatible
dimmers see website)

LOGISTICAL

Unit Packaging

PC/Ctn: 1

Gross Weight: 1,350g/2.98lbs

L 195mm / 7 5/8in W 195mm / 7 5/8in H 175mm / 6 7/8in

Outer Carton

PC/Ctn: 4

Gross Weight: 5.75kg / 12.68lbs

L 405mm / 16in W 205mm / 8 1/8in H 370mm / 14 5/8in

WARRANTY

2 years

EAN

5061046298474

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala North America Inc.
C/O LH Frishkoff & Company
546 5th Avenue, FL 9
New York NY 10036
United States

talalighting.com
hello@tala.co.uk
+1 (240) 724-8111