

# UTTERMOST

## ASSEMBLY INSTRUCTIONS


22579

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*We suggest a licensed electrician for all fixture installations*

### Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clear surface.
2. Make 2PCS marks for the mounting holes on the desired position where you want to install this fixture. pls be sure the distance between the mounting holes is 70mm, then drill the holes on the marks.
3. Install the plastic anchors into the mounting holes on wall and then thread the set screws into the plastic anchors. Please be sure to leave 2mm set screws exposed out of the plastic anchors for hanging fixtures.
4. Assemble the Stem-1 and Stem-2 together using the Nipple , then assemble the stems onto the fixture body.
5. Hang the fixture back plate onto the set screws well
6. Put the fabric shade onto the Socket, and secure with the Socket ring.
7. Assemble the acrylic tail **into the** wheel.
8. Install the light bulb in accordance with the fixture's specifications.  
**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
9. Plug in the fixture and turn on the light.

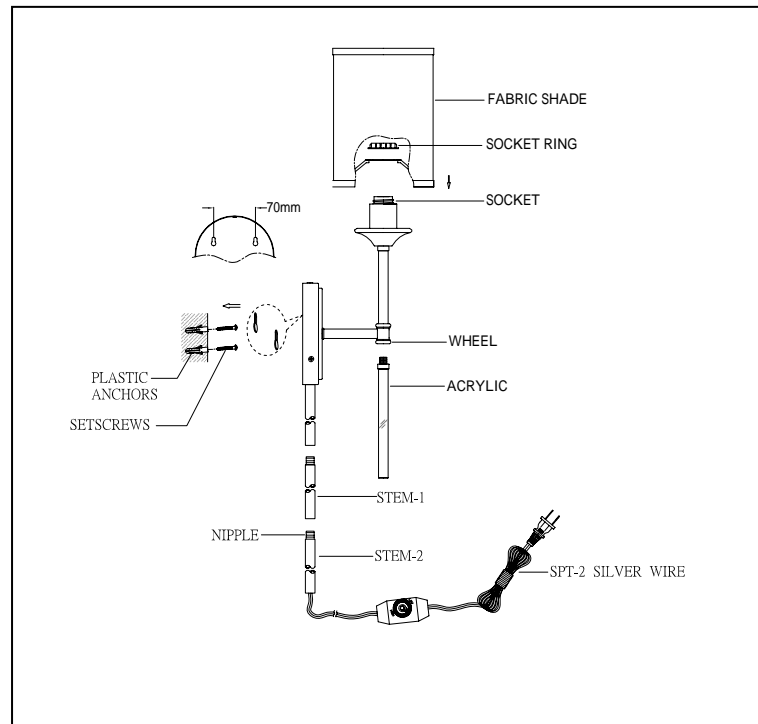

# UTTERMOST

## ASSEMBLY INSTRUCTIONS

22579

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*We suggest a licensed electrician for all fixture installations*

### Installation Steps

1. This fixture could be installed in 2 ways (portable or hardwire) , if installed as hardwire fixture, pls be sure to remove two metal covers from the fixture plate then disconnect the fixture wire and plug cord and take off the plug cord from the fixture. Fill the cord hole with the rubber stopper.
2. Thread the Ground screw into the hole of the back plate. Secure the back plate to the outlet box with the Outlet box screws.
3. Make Wire connections with Wire Connector:
  - The smooth wire (w/ marking) from fixture to Black Wire from power source.
  - The ribbed wire (w/o marking) from Fixture to White Wire from power source.
  - Attach the Ground Wire and house ground wire to the Mounting bar with the green Ground screw.Carefully tuck wires back into the Outlet Box.
4. Place the fixture plate over the back plate and align the mounting holes on the side of the back plate and fixture plate, then secure with screws tightly.
5. Put the fabric shade onto the Socket and secure with the Socket ring.
6. Install the acrylic into the wheel.
7. Install the light bulb in accordance with the fixture's specifications.  
**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
8. Turn on the power at fuse or Circuit Box.

