

Luminaire

Code 6332XX (3500K)
Name 6332 (3500K)
Line PLUSMINUS SOLO

Measurem.

Code 6332XX (3500K)
Name 6332 (3500K)

Source Data

Code 5752086	Correlated Color Temperature (CCT) 3500K	Q.ty 1
Name 1 x LED 7.7 W 450 mA	Color rendering index (CRI) 90	
Line		

Measurement data

Coordinate system CG	Symmetry Type Rotosymmetrical
Date 23-09-2021	Maximum Gamma Angle 180°
Measurement Distance 3.85m	Measurement Flux 791.7 lm
Maximum 1552.05 cd/klm	Position C=0.0° G=0.0°

Electrical Parameters

Channel 1	Channel 2
Voltage 0.00 V	Voltage 17.11 V
Current 0.00 A	Current 0.45 A
Power 0.00 W	Power 7.70 W
Frequency 0 Hz	Frequency 0 Hz
Power Factor 0.00	Power Factor 0.00

Environmental Parameters

Temperature 25.0 °C	Air Speed 0.0 m/s
Humidity 44.0 %	


Luminaire Dimensions

Round Luminaire	Diam. 103 mm	Height 110 mm	
Round Luminous Area	Diam. 50 mm	Height 1 mm	
Horizontal Luminous Area	0.001963 m2	Emitting area on Plane 180°	0.000050 m2
Emitting area on Plane 0°	0.000050 m2	Emitting area on Plane 270°	0.000050 m2
Emitting area on Plane 90°	0.000050 m2	Glare area at 76°	0.000524 m2

Photometric Assessment


Luminaire Flux 791.7 lm	Source Flux 791.7 lm
Efficacy 102.821 lm/W	Efficiency 100.0 %
CIE Flux Codes 98 100 100 100 100	D DIN 5040 A60
F UTE --	B NBN BZ 1

Diam=103mm



Semiplanos C
180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

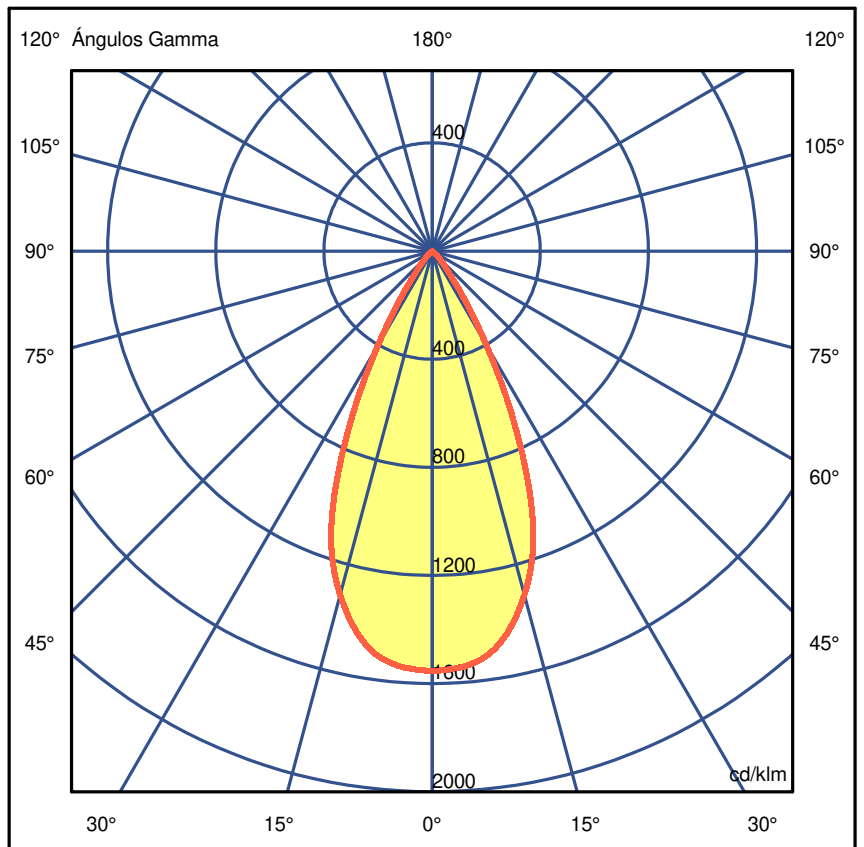

Luminaire

Code 6332XX (3500K)

Name 6332 (3500K)

Measurem.

Code 6332XX (3500K)

Name 6332 (3500K)

Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd/klm Table 1/1

C 0.00	
G 0.0	1552
G 5.0	1537
G 10.0	1467
G 15.0	1316
G 20.0	1094
G 25.0	743
G 30.0	403
G 35.0	167
G 40.0	71
G 45.0	35
G 50.0	9
G 55.0	0
G 60.0	0
G 65.0	0
G 70.0	0
G 75.0	0
G 80.0	0
G 85.0	0
G 90.0	0
G 95.0	0
G100.0	0
G105.0	0
G110.0	0
G115.0	0
G120.0	0
G125.0	0
G130.0	0
G135.0	0
G140.0	0
G145.0	0
G150.0	0
G155.0	0
G160.0	0
G165.0	0
G170.0	0
G175.0	0
G180.0	0

Luminaire

Code 6332XX (3500K)

Name 6332 (3500K)

Measurem.

Code 6332XX (3500K)



Name 6332 (3500K)

Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Diam=103mm

Semiplanos C

180.0  0.0

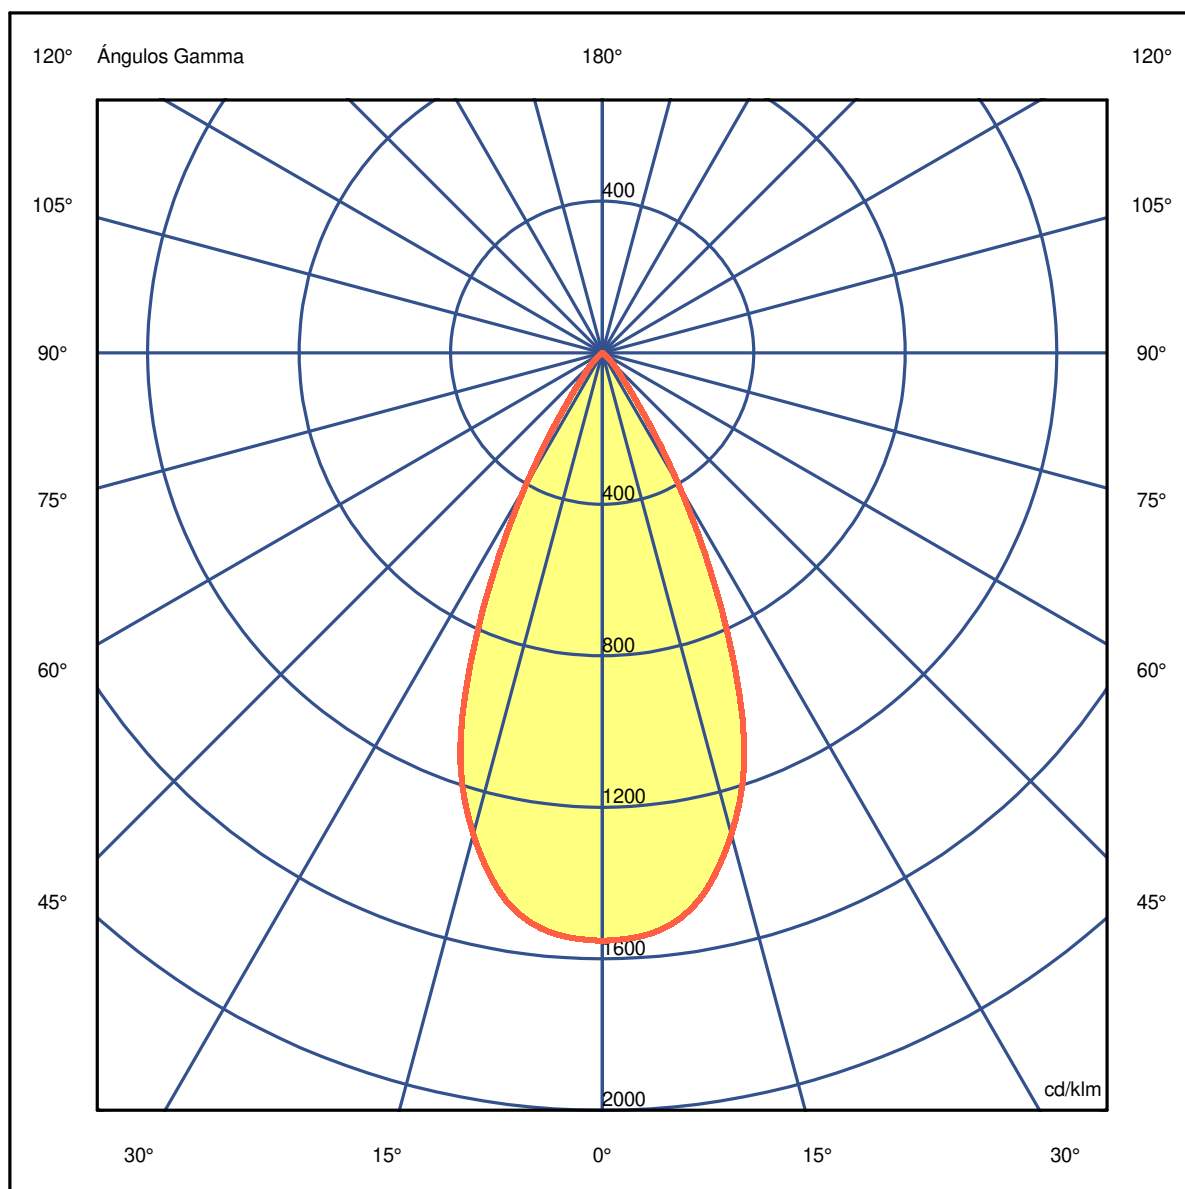


Luminaire
Code 6332XX (3500K)
Name 6332 (3500K)
Measurem.
Code 6332XX (3500K)
Name 6332 (3500K)


Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

Diam=103mm

Semiplanos C



180.0  0.0

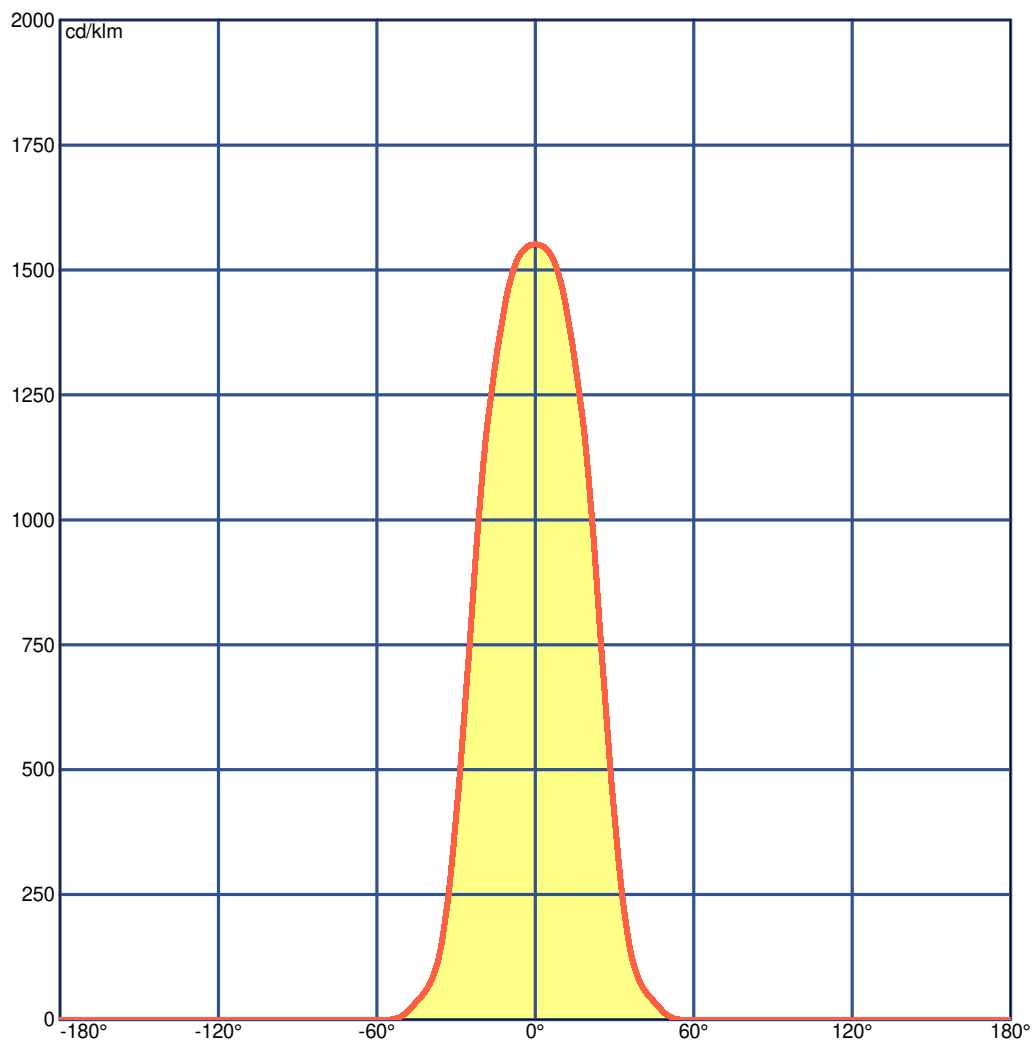

Luminaire

Code 6332XX (3500K)
Name 6332 (3500K)

Measurem.

Code 6332XX (3500K)
Name 6332 (3500K)

Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions										
Room Dimensions	Lateral View					Viewed Endwise				
x=2H y=2H	16.9	17.6	17.2	17.8	18.0	16.9	17.6	17.2	17.8	18.0
x=2H y=3H	16.8	17.4	17.1	17.6	17.8	16.8	17.4	17.1	17.6	17.8
x=2H y=4H	16.7	17.3	17.0	17.5	17.8	16.7	17.3	17.0	17.5	17.8
x=2H y=6H	16.7	17.2	17.0	17.4	17.7	16.7	17.2	17.0	17.4	17.7
x=2H y=8H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
x=2H y=12H	16.6	17.0	16.9	17.3	17.6	16.6	17.0	16.9	17.3	17.6
x=4H y=2H	16.7	17.3	17.0	17.5	17.8	16.7	17.3	17.0	17.5	17.8
x=4H y=3H	16.6	17.0	16.9	17.3	17.6	16.6	17.0	16.9	17.3	17.6
x=4H y=4H	16.5	16.9	16.9	17.2	17.6	16.5	16.9	16.9	17.2	17.6
x=4H y=6H	16.4	16.8	16.8	17.1	17.5	16.4	16.8	16.8	17.1	17.5
x=4H y=8H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
x=4H y=12H	16.4	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.4
x=8H y=4H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
x=8H y=6H	16.3	16.5	16.8	16.9	17.4	16.3	16.5	16.8	16.9	17.4
x=8H y=8H	16.3	16.4	16.7	16.9	17.4	16.3	16.4	16.7	16.9	17.4
x=8H y=12H	16.2	16.3	16.7	16.8	17.3	16.2	16.3	16.7	16.8	17.3
x=12H y=4H	16.4	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.4
x=12H y=6H	16.3	16.4	16.7	16.9	17.4	16.3	16.4	16.7	16.9	17.4
x=12H y=8H	16.2	16.3	16.7	16.8	17.3	16.2	16.3	16.7	16.8	17.3

Luminaire

Code 6332XX (3500K)

Name 6332 (3500K)

Measurem.

Code 6332XX (3500K)


Name 6332 (3500K)


Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.46	0.91	1.37	1.83	2.28	OC	0.46	0.91	1.37	1.83	2.28
OB	0.46	0.91	1.37	1.83	2.28	OD	0.46	0.91	1.37	1.83	2.28

	0	5	15	25	35	45	55	65	75	85
OA	1228.79	1216.65	1041.67	588.17	132.17	28.06	0.00	0.00	0.00	0.00
OB	1228.79	1216.65	1041.67	588.17	132.17	28.06	0.00	0.00	0.00	0.00
OC	1228.79	1216.65	1041.67	588.17	132.17	28.06	0.00	0.00	0.00	0.00
OD	1228.79	1216.65	1041.67	588.17	132.17	28.06	0.00	0.00	0.00	0.00

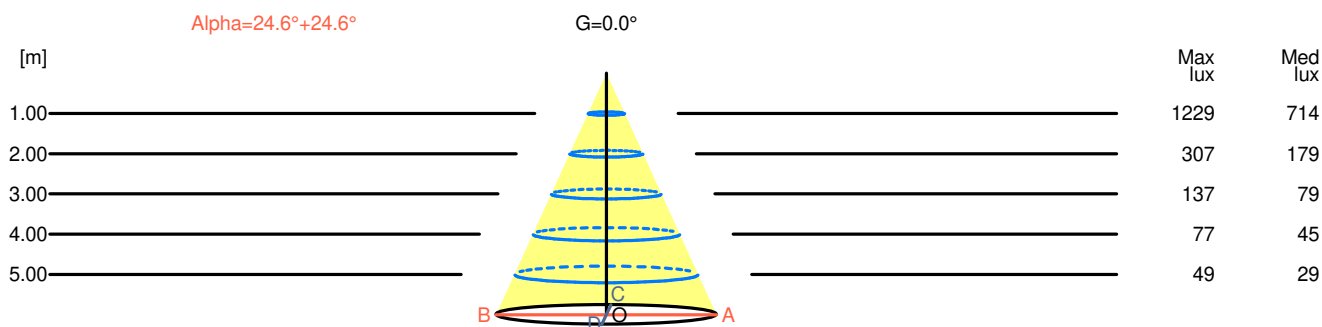

H[m]	D[m]	Max lux	Med lux	Alpha=24.6°+24.6°	G=0.0	
1.00	0.91	1229	714			
2.00	1.83	307	179			
3.00	2.74	137	79			
4.00	3.66	77	45			
5.00	4.57	49	29			

Luminaire

Code 6332XX (3500K)

Name 6332 (3500K)

Measurement

Code 6332XX (3500K)

Name 6332 (3500K)

Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Flujo Total=791.72 Flujo Luminaria=791.72

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.72	0.77	0.82	0.85	0.88	0.92	0.95	0.97	0.99	1.00	1.02	1.02
RC	-	-	-	-	-	-	-	-	-	-	-	-

Flujo Zonal por 1000 Lúmenes


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	144	508	846	970	998	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

Códigos de Flujo C.I.E.

98 100 100 100 100

C.I.E. -/-/-/-/-/-/-/-/-/-
D DIN 5040 A60
F UTE --
B NBN BZ 1
RN 0.00000 %
BLF 1.0

LOR 100.00000 %
ULOR 0.00000 %
DLOR 100.00000 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

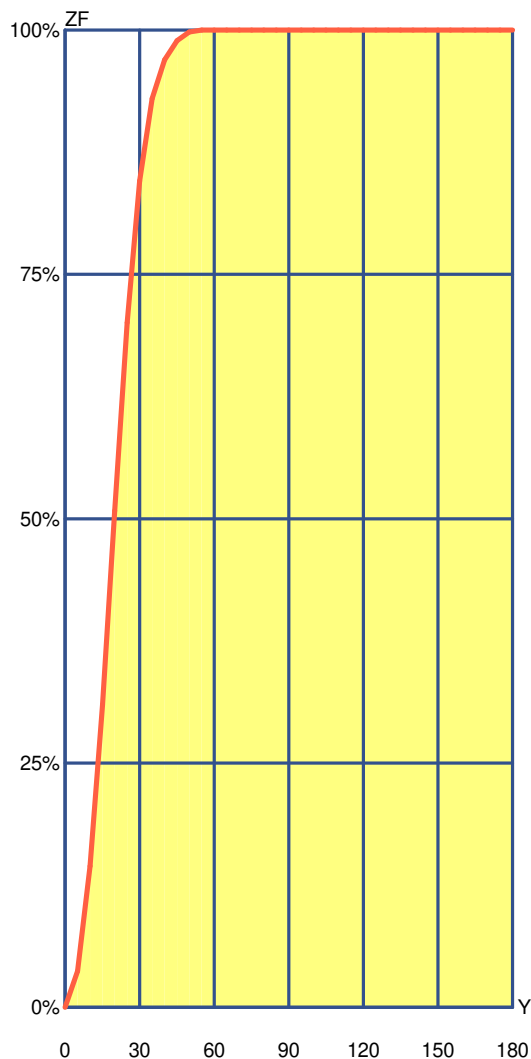

Flujo Zonal				
Gamma °	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	36.93	36.93	3.69 %	3.69 %
10°	107.46	144.39	10.75 %	14.44 %
15°	165.09	309.48	16.51 %	30.95 %
20°	198.60	508.08	19.86 %	50.81 %
25°	192.67	700.75	19.27 %	70.08 %
30°	145.07	845.82	14.51 %	84.58 %
35°	84.00	929.82	8.40 %	92.98 %
40°	39.69	969.51	3.97 %	96.95 %
45°	19.70	989.20	1.97 %	98.92 %
50°	8.91	998.12	0.89 %	99.81 %
55°	1.88	1000.00	0.19 %	100.00 %
60°	0.00	1000.00	0.00 %	100.00 %
65°	0.00	1000.00	0.00 %	100.00 %
70°	0.00	1000.00	0.00 %	100.00 %
75°	0.00	1000.00	0.00 %	100.00 %
80°	0.00	1000.00	0.00 %	100.00 %
85°	0.00	1000.00	0.00 %	100.00 %
90°	0.00	1000.00	0.00 %	100.00 %
95°	0.00	1000.00	0.00 %	100.00 %
100°	0.00	1000.00	0.00 %	100.00 %
105°	0.00	1000.00	0.00 %	100.00 %
110°	0.00	1000.00	0.00 %	100.00 %
115°	0.00	1000.00	0.00 %	100.00 %
120°	0.00	1000.00	0.00 %	100.00 %
125°	0.00	1000.00	0.00 %	100.00 %
130°	0.00	1000.00	0.00 %	100.00 %
135°	0.00	1000.00	0.00 %	100.00 %
140°	0.00	1000.00	0.00 %	100.00 %
145°	0.00	1000.00	0.00 %	100.00 %
150°	0.00	1000.00	0.00 %	100.00 %
155°	0.00	1000.00	0.00 %	100.00 %
160°	0.00	1000.00	0.00 %	100.00 %
165°	0.00	1000.00	0.00 %	100.00 %
170°	0.00	1000.00	0.00 %	100.00 %
175°	0.00	1000.00	0.00 %	100.00 %
180°	0.00	1000.00	0.00 %	100.00 %

Luminaire

Code 6332XX (3500K)

Name 6332 (3500K)

Measurem.

Code 6332XX (3500K)

Name 6332 (3500K)

Luminaire Flux	792 lm	Luminaire Power	7.7 W	Efficacy	102.821 lm/W	Efficiency	100.00%
Source Flux	792 lm	Maximum value	1552.05 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

