

Plusminus solo


6333

Design By Diez Office

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides a diffused light.

VIBIA

Spec sheet



Finish

- 37 Terra Red
NCS S 4040-Y70R
- 24 Beige M1
NCS S 2005-Y50R
- 42 Blue M1
NCS S 5010-B10G
- 53 Green M1
NCS S 6005-G80Y
- 11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K

Dimming

TRIAC / DALI / 0-10V

Installation type

Remote

LED

CRI>90
2700 K / 3000 K / 3500 K

Driver

250 120~277 V V 50~60 Hz HZ

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application

Ceiling Fixtures

Packaging


Box

Gross weight
Net weight



Lighting effect

General Flat Diffuser

First layer of basic, general illumination



Photometric Data

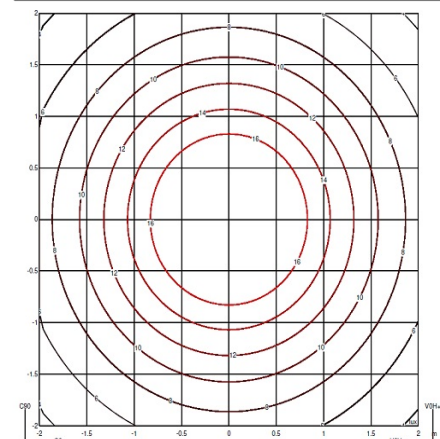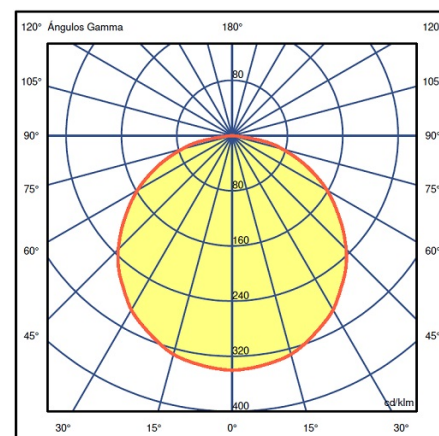

Efficiency 86.667 lm/W
Coordination System CG
Total Flux 364 lm
Maximum Value 340.24 cd/klm

Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa