

Plusminus solo



6335

Design By Diez Office

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides a diffuse light.

VIBIA

Spec sheet

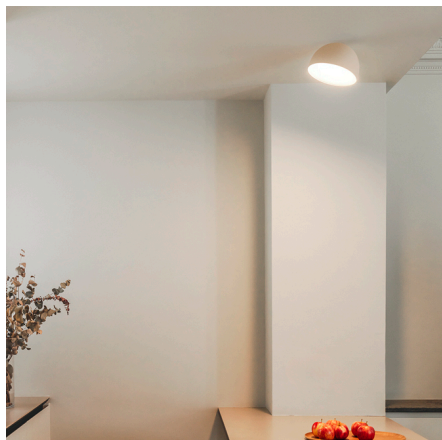

Finish

53 Green M1
NCS S 6005-G80Y

42 Blue M1
NCS S 5010-B10G

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

37 Terra Red
NCS S 4040-Y70R

LED

2700 K / 3000 K / 3500 K

Dimming

TRIAC / DALI / 0-10V

Installation type

Remote

LED

CRI>90
2700 K / 3000 K / 3500 K

Driver

Constant Current 450 120~277 V V
50~60 Hz HZ

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application

Ceiling Fixtures

Packaging


Box

Gross weight
Net weight



Lighting effect

General Flat Diffuser

First layer of basic, general illumination



Photometric Data

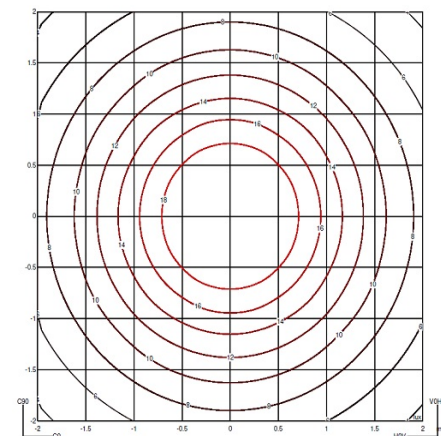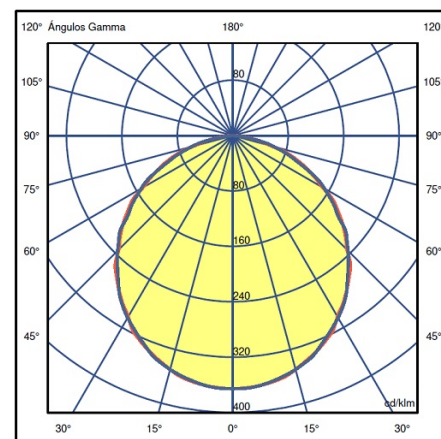

Efficiency 46.041 lm/W
Coordination System CG
Total Flux 364 lm
Maximum Value 365.65 cd/klm

Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa