

Luminaire


Code 5979
Name SPA 5979 3500K
Line SPA

Measurem.

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	3000 mm	Width	50 mm	Height	25 mm
Rectangular Luminous Area		Length	3000 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.120000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.029031 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		15-12-2022		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1713 lm	
Operator				Rated Voltage			
Temperature				Rated Current			
Humidity				Photocell			
Notes							

Luminaire Sources						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
LED	LED	LED			1	
C.I.E.	53 83 96 100 100	D DIN 5040	A40			
F UTE	1.00 D	B NBN	BZ 4			

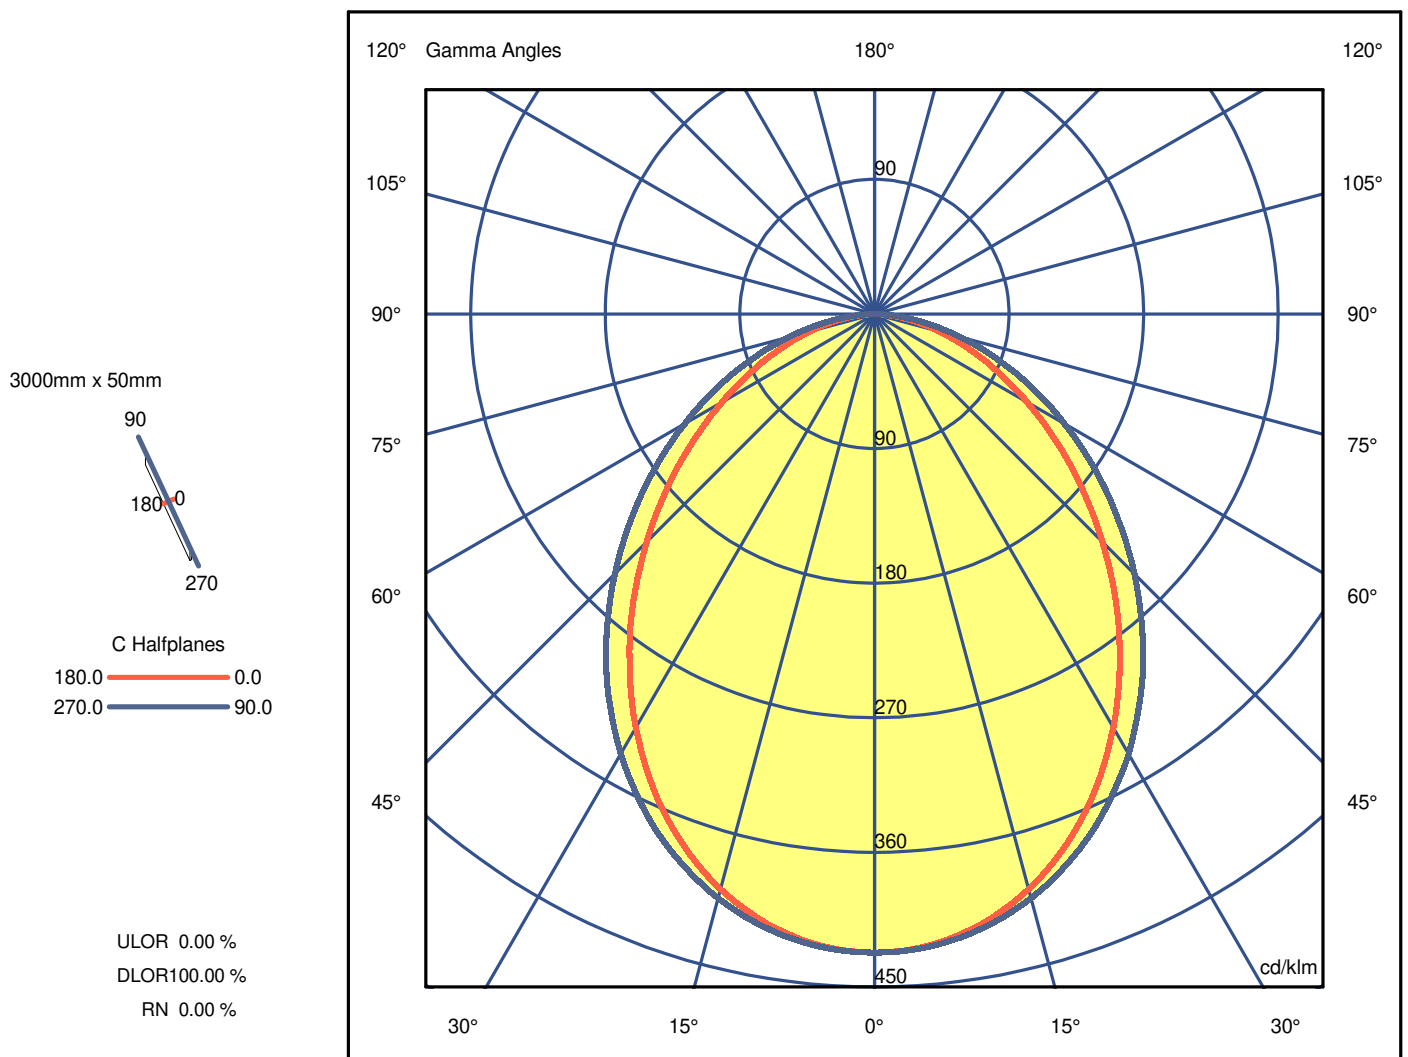

Luminaire

Code 5979
Name SPA 5979 3500K
Line SPA

Measurem.

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	427.04	427.04	427.04	427.04	427.04	427.04	427.04
G 2.5	426.18	426.19	426.24	426.30	426.45	426.40	426.37
G 5.0	423.64	423.73	423.83	424.15	424.33	424.49	424.49
G 7.5	419.52	419.68	420.01	420.43	420.91	421.15	421.32
G 10.0	413.91	414.08	414.55	415.45	416.21	416.75	416.89
G 12.5	406.55	407.06	407.76	408.97	410.08	411.02	411.24
G 15.0	398.07	398.49	399.56	401.21	402.80	404.08	404.40
G 17.5	387.93	388.46	389.85	391.93	394.09	395.70	396.20
G 20.0	376.46	377.19	378.89	381.55	384.17	386.47	386.96
G 22.5	363.86	364.69	366.74	369.96	373.15	375.92	376.69
G 25.0	350.09	350.97	353.32	357.24	360.87	364.06	365.19
G 27.5	334.98	336.39	339.01	343.56	347.86	351.63	352.64
G 30.0	319.18	320.51	323.60	328.67	333.78	337.80	339.66
G 32.5	302.97	304.46	307.68	313.18	318.75	323.72	325.04
G 35.0	285.68	287.63	290.80	297.24	303.16	308.60	310.41
G 37.5	268.72	270.14	274.34	280.43	287.16	292.79	295.06
G 40.0	251.03	252.84	256.76	263.68	270.40	277.07	278.73
G 42.5	233.14	235.42	239.08	246.36	253.39	260.36	262.16
G 45.0	215.58	217.57	221.83	228.98	236.57	243.43	245.65
G 47.5	198.18	200.55	204.53	212.06	219.38	226.80	229.09
G 50.0	180.95	183.24	187.43	194.98	202.66	210.15	212.05
G 52.5	164.55	166.80	170.57	178.59	186.18	193.33	195.69
G 55.0	148.13	150.36	154.79	162.30	169.97	176.98	179.12
G 57.5	132.63	135.18	138.65	146.60	153.95	160.85	162.62
G 60.0	117.92	119.96	124.06	131.08	138.35	145.02	146.66
G 62.5	103.93	106.04	109.40	116.50	123.47	129.70	131.04
G 65.0	90.46	92.59	95.70	102.46	108.72	114.82	115.66
G 67.5	78.22	79.88	83.06	88.70	94.99	99.83	101.17
G 70.0	66.16	67.98	70.59	76.12	81.02	86.10	86.39
G 72.5	55.27	56.81	59.19	63.93	68.35	72.66	72.90
G 75.0	44.81	46.28	48.34	52.52	55.97	59.76	59.31
G 77.5	35.40	36.46	37.98	41.44	44.41	47.52	46.80
G 80.0	25.92	26.87	28.12	31.06	33.14	35.62	34.85
G 82.5	17.57	18.23	19.14	21.45	23.21	25.20	24.32
G 85.0	9.27	10.30	10.72	12.55	13.96	15.63	15.05
G 87.5	2.70	4.10	3.74	5.97	5.82	7.68	7.12
G 90.0	0.89	1.10	1.37	1.88	2.63	3.37	3.68

Luminaire


Code 5979
Name SPA 5979 3500K
Line SPA

Measurement


Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

3000mm x 50mm



C Halfplanes

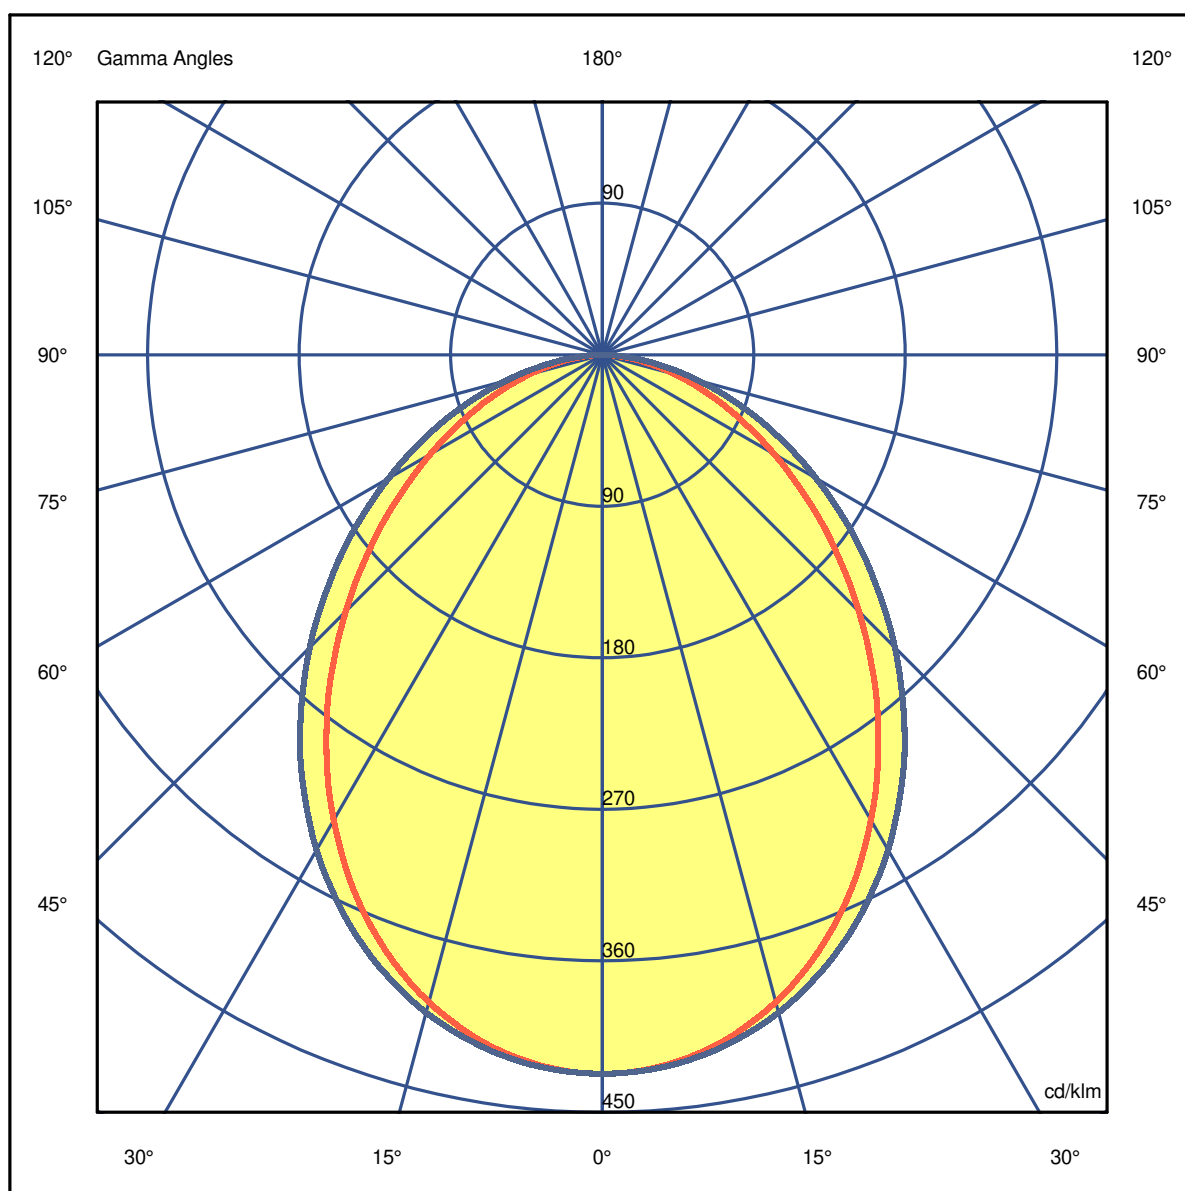

Luminaire


Code 5979
Name SPA 5979 3500K
Line SPA

Measurem.

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022


Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

3000mm x 50mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

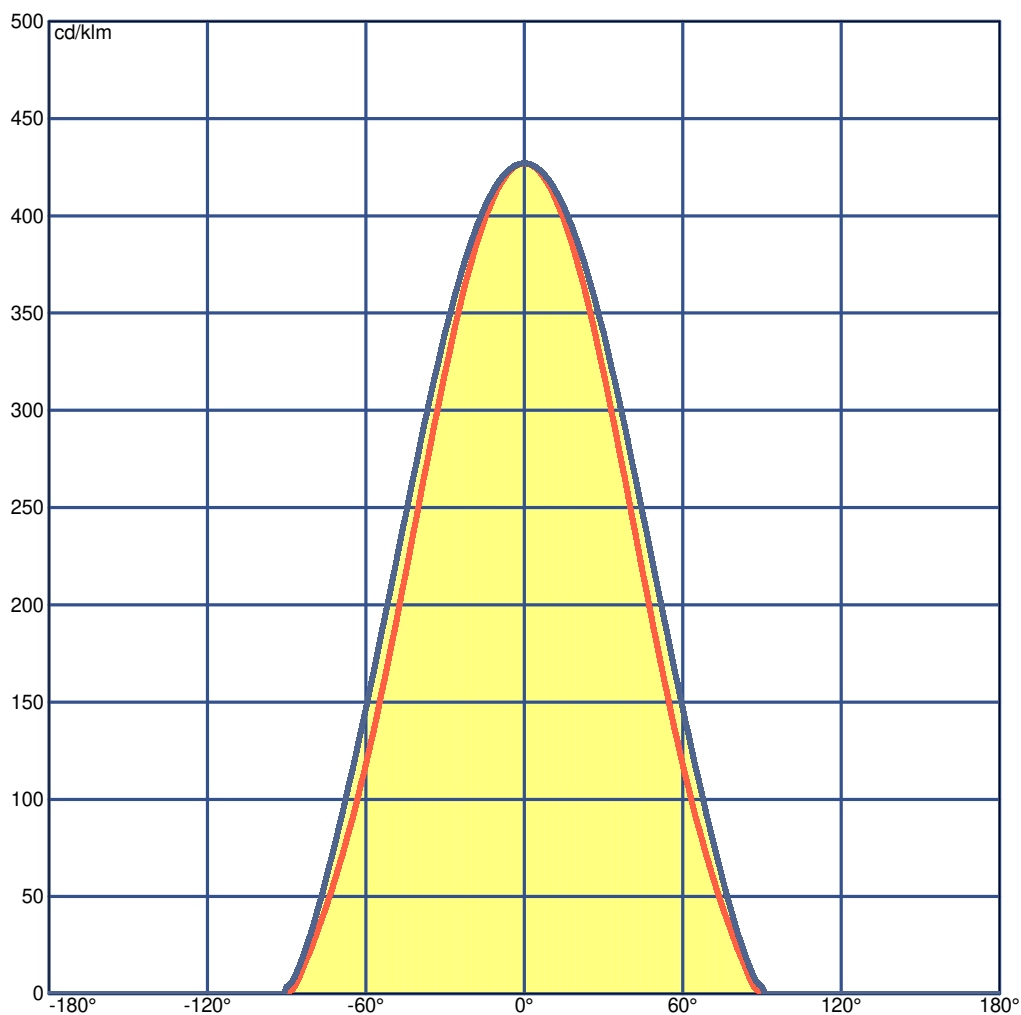

Luminaire

Code 5979
Name SPA 5979 3500K
Line SPA

Measurement

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions										
Room Dimensions	Lateral View					Viewed Endwise				
	x=2H y=2H	x=2H y=3H	x=2H y=4H	x=2H y=6H	x=2H y=8H	x=2H y=12H	x=4H y=2H	x=4H y=3H	x=4H y=4H	x=4H y=6H
	16.8	18.0	17.0	18.2	18.4	17.7	18.9	19.1	19.4	19.4
	17.9	19.0	18.2	19.3	19.6	19.1	20.2	19.4	20.5	20.7
	18.4	19.4	18.7	19.7	20.0	19.7	20.7	20.0	21.0	21.3
	18.7	19.7	19.0	20.0	20.3	20.1	21.0	20.4	21.3	21.6
	18.8	19.7	19.2	20.1	20.4	20.2	21.1	20.5	21.4	21.8
	18.8	19.7	19.2	20.1	20.4	20.3	21.2	20.6	21.5	21.8
	17.4	18.5	17.8	18.8	19.0	18.2	19.2	18.5	19.5	19.8
	18.8	19.7	19.1	20.0	20.3	19.8	20.7	20.1	21.0	21.3
	19.3	20.1	19.7	20.5	20.9	20.5	21.3	20.9	21.6	22.0
	19.8	20.5	20.2	20.8	21.3	21.0	21.7	21.4	22.1	22.5
	19.9	20.6	20.4	21.0	21.4	21.2	21.9	21.7	22.3	22.7
	20.0	20.6	20.4	21.0	21.4	21.3	21.9	21.8	22.3	22.8
	19.7	20.3	20.1	20.7	21.1	20.7	21.3	21.1	21.7	22.1
	20.2	20.7	20.7	21.2	21.6	21.3	21.9	21.8	22.3	22.7
	20.4	20.9	20.9	21.3	21.8	21.6	22.1	22.1	22.5	23.0
	20.5	20.9	21.0	21.4	21.9	21.8	22.2	22.3	22.7	23.2
	19.7	20.3	20.1	20.7	21.1	20.7	21.3	21.1	21.7	22.1
	20.3	20.7	20.8	21.2	21.7	21.4	21.8	21.9	22.3	22.8
	20.5	20.9	21.0	21.4	21.9	21.7	22.1	22.2	22.5	23.0

Luminaire

Code 5979
Name SPA 5979 3500K
Line SPA

Measurem.


Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.01	2.02	3.03	4.04	5.05	OC	1.18	2.37	3.55	4.73	5.91
OB	1.01	2.02	3.03	4.04	5.05	OD	1.18	2.37	3.55	4.73	5.91

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	731.51	725.68	681.88	599.69	489.37	369.29	253.75	154.96	76.77	15.88
OB	731.51	725.68	681.88	599.69	489.37	369.29	253.75	154.96	76.77	15.88
OC	731.51	727.14	692.73	625.56	531.73	420.80	306.82	198.12	101.59	25.79
OD	731.51	727.14	692.73	625.56	531.73	420.80	306.82	198.12	101.59	25.79

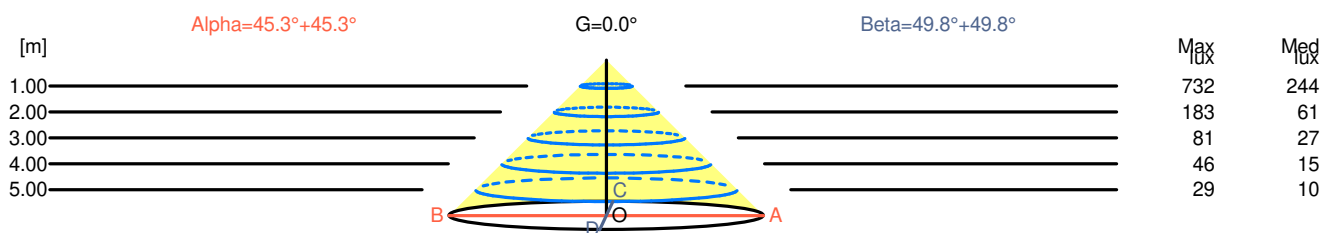

H[m]	D[m]	Max lux	Med lux	Alpha=45.3°+45.3°	G=0.0
1.00	2.02	732	244		
2.00	4.04	183	61		
3.00	6.06	81	27		
4.00	8.08	46	15		
5.00	10.10	29	10		

H[m]	D[m]	Max lux	Med lux	Beta=49.8°+49.8°	G=0.0
1.00	2.37	732	244		
2.00	4.73	183	61		
3.00	7.10	81	27		
4.00	9.46	46	15		
5.00	11.83	29	10		

Luminaire

Code 5979
Name SPA 5979 3500K
Line SPA

Measurem.

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Total Flux=1712.98 Luminaire Flux=1712.98

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.35	0.43	0.51	0.58	0.63	0.71	0.77	0.80	0.85	0.88	0.94	0.97
RC	4	4	4	4	4	4	4	4	4	4	4	4

Zonal Flux per 1000 Lumen


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	40	153	318	503	681	827	929	985	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

CIE Flux Codes

53 83 96 100 100

C.I.E. 4
D DIN 5040 A40
F UTE 1.00 D
B NBN BZ 4
RN 0.00000 %
BLF 1.0

LOR 100.00000 %
ULOR 0.00000 %
DLOR 100.00000 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

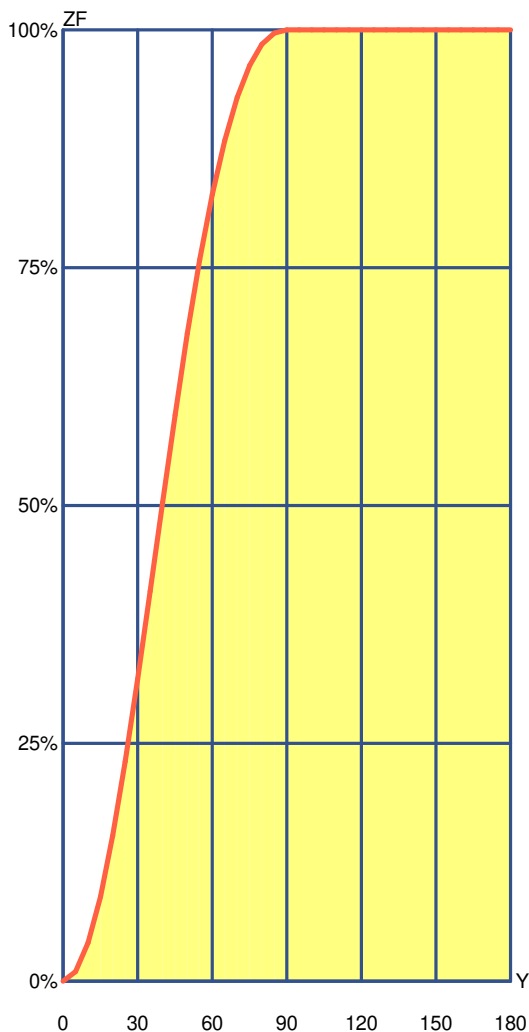

Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00 %	0.00 %
5°	10.18	10.18	1.02 %	1.02 %
10°	30.03	40.21	3.00 %	4.02 %
15°	48.44	88.64	4.84 %	8.86 %
20°	64.51	153.16	6.45 %	15.32 %
25°	77.51	230.66	7.75 %	23.07 %
30°	86.85	317.51	8.68 %	31.75 %
35°	92.24	409.75	9.22 %	40.97 %
40°	93.69	503.44	9.37 %	50.34 %
45°	91.41	594.85	9.14 %	59.49 %
50°	85.94	680.80	8.59 %	68.08 %
55°	77.93	758.73	7.79 %	75.87 %
60°	68.03	826.76	6.80 %	82.68 %
65°	56.95	883.71	5.70 %	88.37 %
70°	45.29	929.00	4.53 %	92.90 %
75°	33.59	962.59	3.36 %	96.26 %
80°	22.24	984.83	2.22 %	98.48 %
85°	11.70	996.52	1.17 %	99.65 %
90°	3.48	1000.00	0.35 %	100.00 %
95°	0.00	1000.00	0.00 %	100.00 %
100°	0.00	1000.00	0.00 %	100.00 %
105°	0.00	1000.00	0.00 %	100.00 %
110°	0.00	1000.00	0.00 %	100.00 %
115°	0.00	1000.00	0.00 %	100.00 %
120°	0.00	1000.00	0.00 %	100.00 %
125°	0.00	1000.00	0.00 %	100.00 %
130°	0.00	1000.00	0.00 %	100.00 %
135°	0.00	1000.00	0.00 %	100.00 %
140°	0.00	1000.00	0.00 %	100.00 %
145°	0.00	1000.00	0.00 %	100.00 %
150°	0.00	1000.00	0.00 %	100.00 %
155°	0.00	1000.00	0.00 %	100.00 %
160°	0.00	1000.00	0.00 %	100.00 %
165°	0.00	1000.00	0.00 %	100.00 %
170°	0.00	1000.00	0.00 %	100.00 %
175°	0.00	1000.00	0.00 %	100.00 %
180°	0.00	1000.00	0.00 %	100.00 %

Luminaire

Code 5979
Name SPA 5979 3500K
Line SPA

Measurement

Code SPA 5979 3500K
Name SPA 5979 (3000mm)
Date 15-12-2022

Luminaire Flux	1713 lm	Luminaire Power	26.5 W	Efficacy	64.738 lm/W	Efficiency	100.00%
Source Flux	1713 lm	Maximum value	427.04 cd/klm	Position	C=0.00 G=0.00	CG Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

