


## ASSEMBLY INSTRUCTIONS

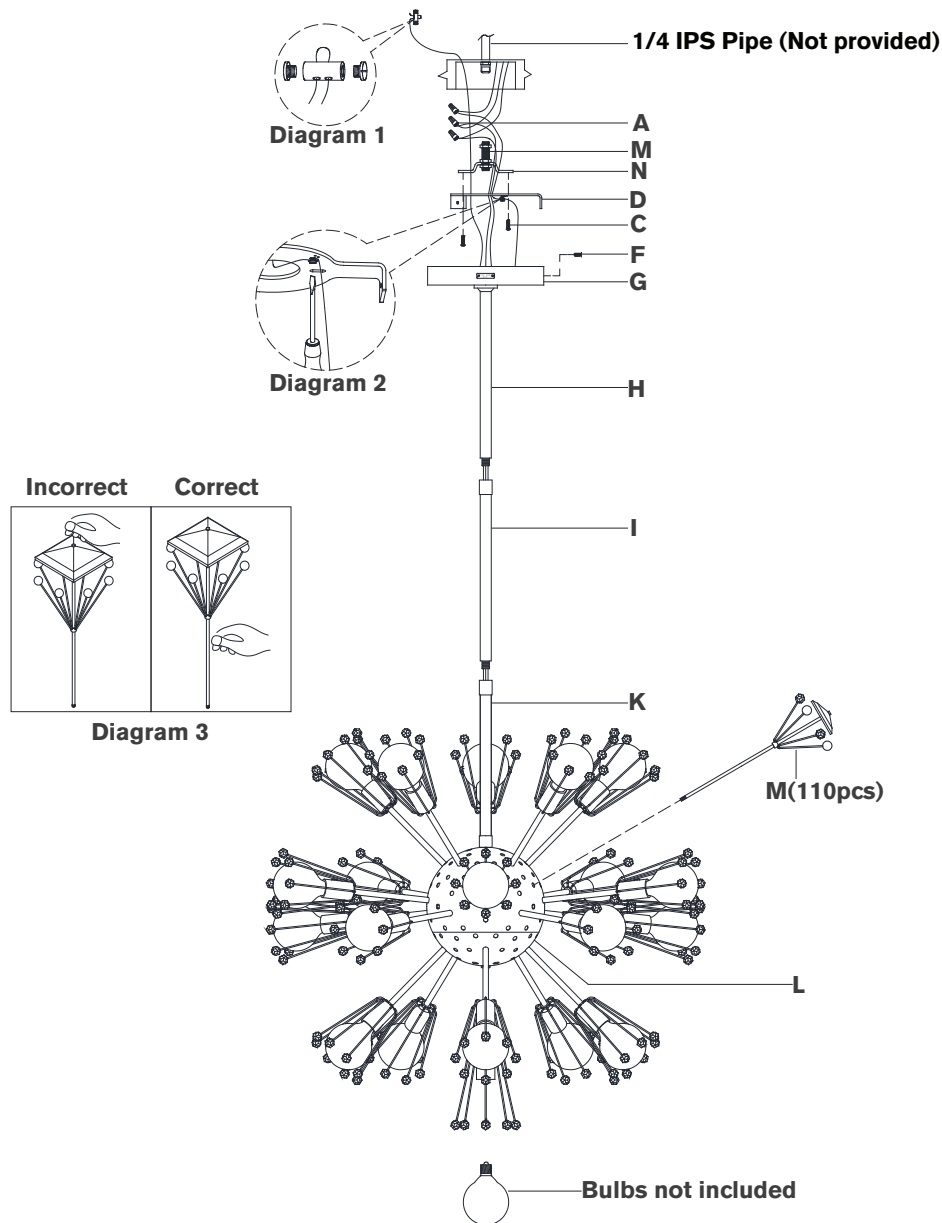

## Dickinson Large Pendant

Item # KS 5006

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Slip-joint pliers	

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate **(D)** from canopy **(G)** by removing screws **(F)**.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building (not included). Then install hex nut and threaded nipple **(M)** into receiver and tighten with wrench.  
**NOTE:** Item must be supported independent of the junction box due to weight.
- Install mounting bracket **(N)** to threaded nipple **(M)** and secure with hex nut.
- Install mounting plate **(D)** to mounting bracket **(N)** and secure with screws **(C)**.
- Feed electrical wire, ground wire and safety cable through bottom rod **(I)** and connect to fixture **(K)**.
- Continue feeding wires through top rod **(H)** and connect to bottom rod **(I)**.
- Cut excess wires, being sure to leave enough to reach the junction box.
- Separate two sides of molded wire, and strip insulation on each 5/8".
- Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure. (See diagram 1)

VISUAL COMFORT



## ASSEMBLY INSTRUCTIONS

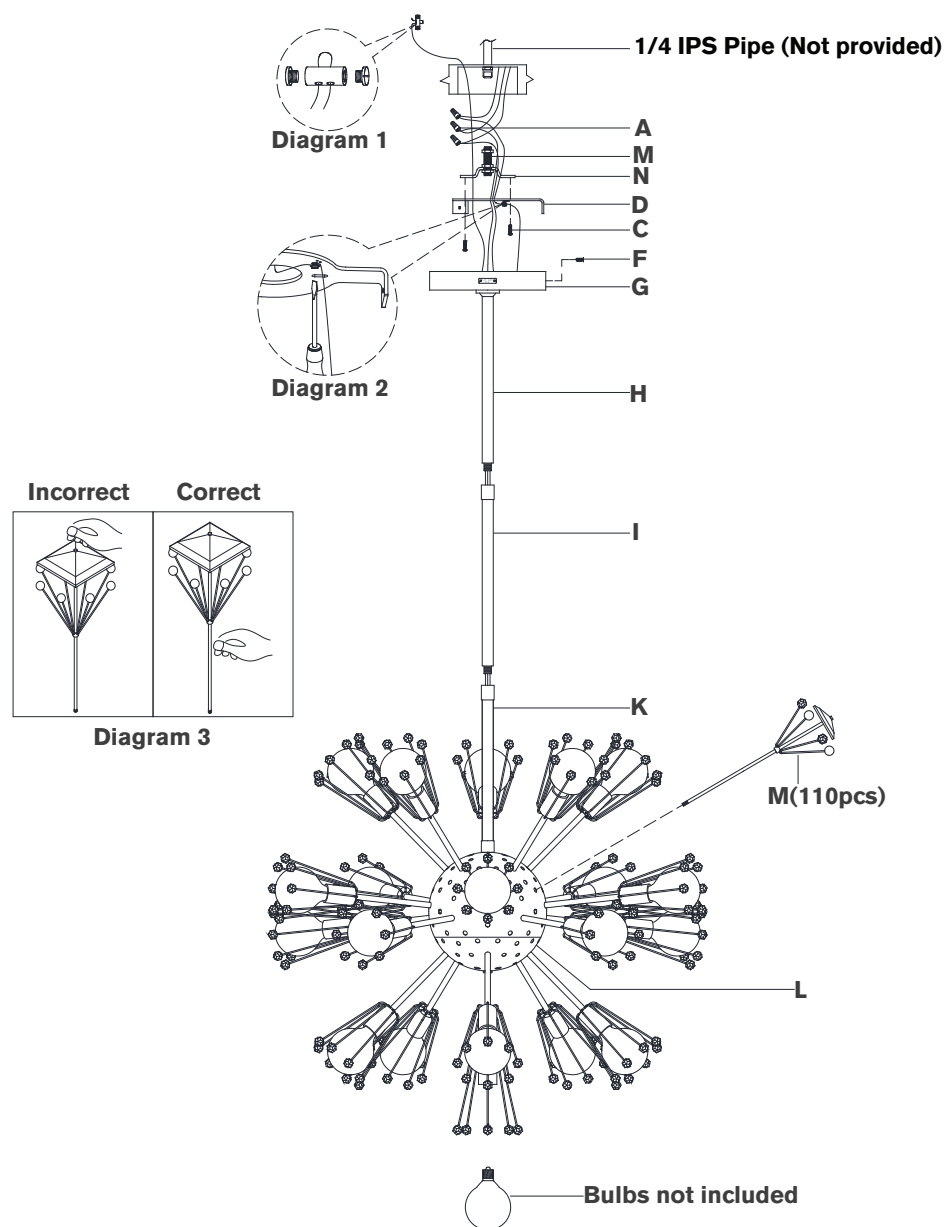

## Dickinson Large Pendant

Item # KS 5006

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 2). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.

**NOTE:** It is imperative that the fixture is grounded.

12. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(A)**.
13. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.

**CAUTION:** Do not reverse the hot and neutral connections.

14. Make sure all wire connections are tight, then carefully tuck into the junction box.
  15. Install canopy **(G)** to mounting plate **(D)** and secure with screws **(F)**.
  16. Install light bulbs into the sockets.
  17. Thread crystal flowers **(M)** to center hub **(L)**.
- NOTE:** Thread crystal flowers **(M)** by stem as shown in diagram 3 to avoid damages.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.