
## **ASSEMBLY INSTRUCTIONS**



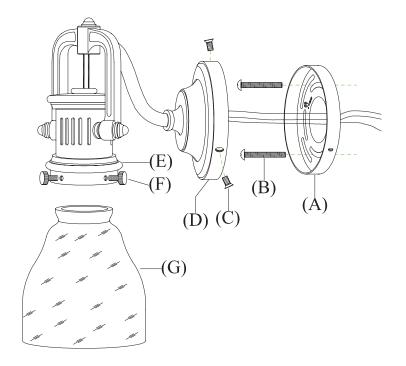

Item # SL2975

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- Remove mounting plate (A) from fixture base (D) by unscrewing base screws (C). Attach mounting plate (A) to wall outlet box and secure with mounting screws (B).
- Attach ground (green) wire to ground wire from wall outlet box (usually green
  or copper in color), fasten together with a plastic wire connector. Tightly wrap
  the wire connector with electrical tape so the end of the connector is sealed.
  IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE
  PROPERLY GROUNDED.
- Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
- Repeat the same procedure for the hot (black) wires. Always make sure that no
  wire strands are left outside the connectors.

  DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS
  - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- 5. Attach fixture base (D) onto the affixed mounting plate (A) and secure with base screws (C).
- 6. Loosen thumbscrews (F) from shade holder (E), insert glass shade (G) into shade holder (E) and secure with thumbscrews (F).
- 7. Insert light bulb (not included) into socket.
- B. Assembly is complete.



