

ASSEMBLY INSTRUCTIONS

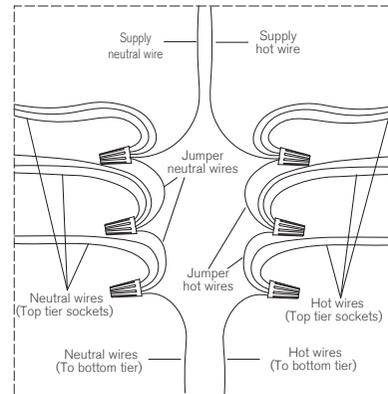
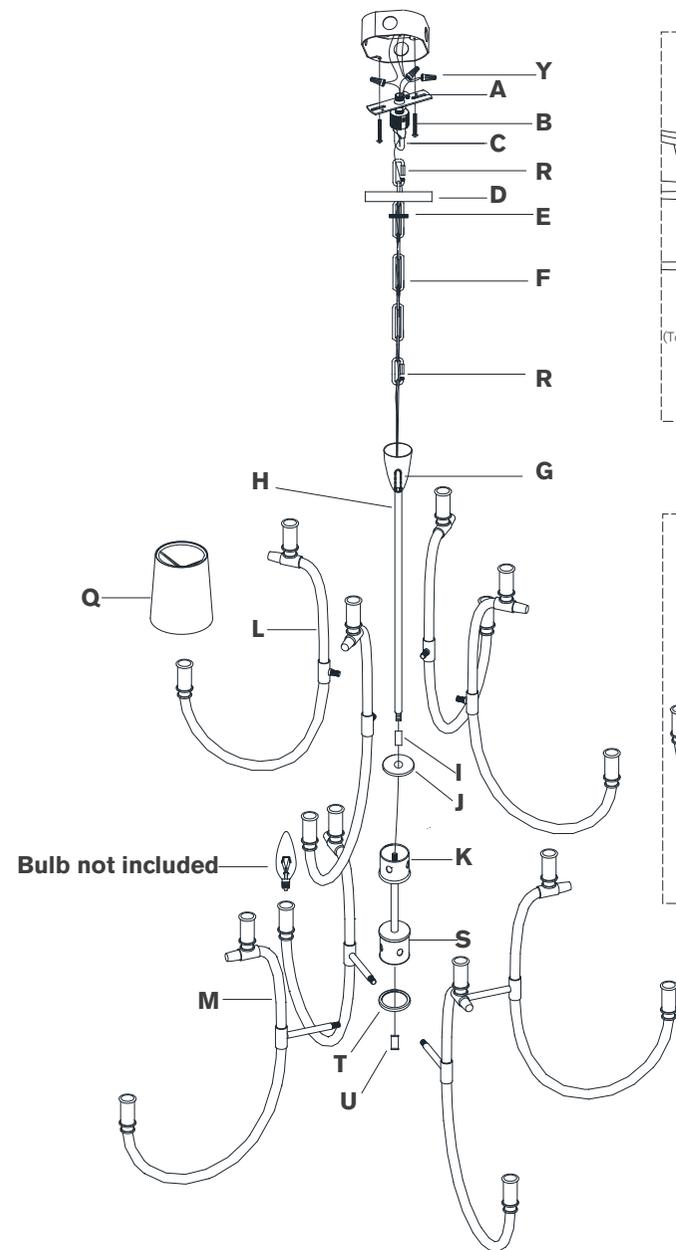


Diagram 2

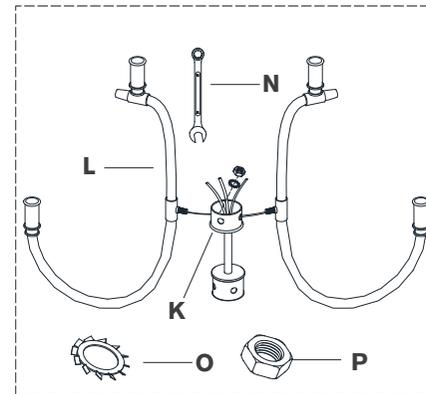


Diagram 1

Clarice Large Chandelier

Item # JN 5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove collar loop (C) from chain (F) by unscrewing quick link (R).
- Install mounting plate (A) to junction box and secure with mounting screws (B).
- Secure collar loop (C) to mounting plate (A) using pliers to tighten locknut.
- Install canopy (D) to collar loop (C) and secure with collar ring (E).
- Install fixture arms (L) to hub (K) and secure with lock washers (O) and hex nuts (P) using provided wrench (N). See diagram 1.
NOTE: Check that the arms are spaced evenly before final tightening.
- Connect neutral wires (ribbed) from (3) top tier sockets to supply neutral wire (ribbed) and jumper neutral wire (marked with "N"), then secure using wire nut (Y). Repeat for remaining neutral wires on top tier sockets.
NOTE: Divide sections of neutral wires as shown in diagram 2.
- Connect hot wires (smooth with markings) from (3) top tier sockets to supply hot wire (ribbed) and jumper hot wire (marked with "L"), then secure using wire nut (Y). Repeat for remaining hot wires on top tier sockets.
NOTE: Divide sections of hot wires as shown in diagram 2.
- Feed fixture wires through hub cap (J), coupling (I) and rod (H).

VISUAL COMFORT



ASSEMBLY INSTRUCTIONS

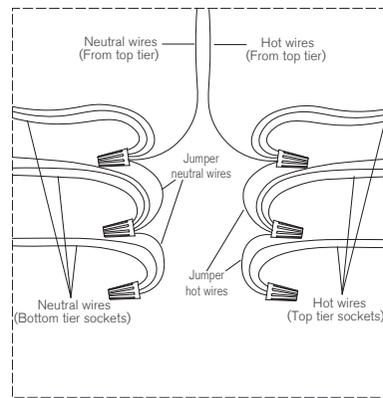
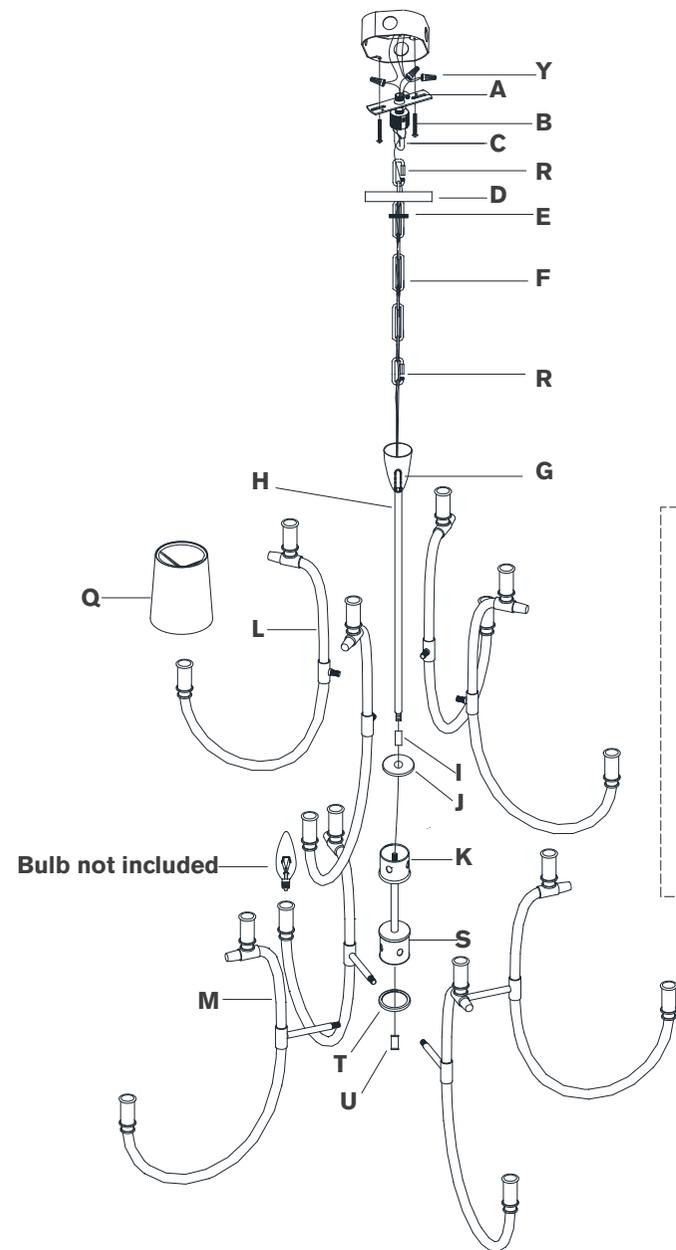


Diagram 4

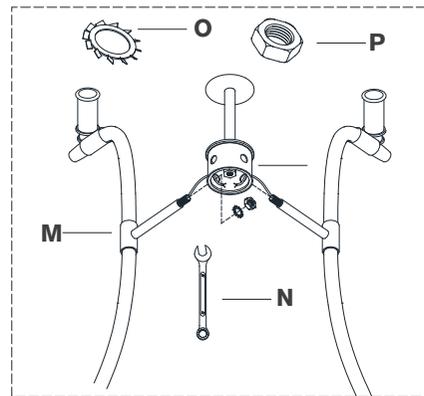


Diagram 3

Clarice Large Chandelier

Item # JN 5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Install hub cap (**J**) to hub (**K**) and secure with the coupling (**I**), then thread rod (**H**) to coupling (**I**).
11. Determine desired overall length, and amount of chain (**F**) needed. Shorten chain using chain pliers. (Keep extra chain)
12. Attach chain (**F**) to collar loop (**C**) and fixture loop (**G**) using quick links (**R**). Secure quick links (**R**).
13. Install fixture arms (**M**) to hub (**S**) and secure with lock washers (**O**) and hex nuts (**P**) using provided wrench (**N**). See diagram 3.

NOTE: Check that the arms are spaced evenly before final tightening.
14. Connect neutral wires (ribbed) from (3) bottom tier sockets to supply neutral wire (ribbed) and jumper neutral wire (marked with "N"), then secure using wire nut (**Y**). Repeat for remaining neutral wires on bottom tier sockets.

NOTE: Divide sections of neutral wires as shown in diagram 4.
15. Connect hot wires (smooth with markings) from (3) bottom tier sockets to supply hot wire (ribbed) and jumper hot wire (marked with "L"), then secure using wire nut (**Y**). Repeat for remaining hot wires on bottom tier sockets.

NOTE: Divide sections of hot wires as shown in diagram 4.
16. Install hub cap (**T**) to the bottom of hub (**S**) and secure with finial (**U**).
17. Thread fixture wire and ground wire through chain (**F**).

NOTE: When you reach the collar loop (**C**), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
18. Separate two sides of molded wire, and strip insulation on each 5/8".
19. Loosen collar ring (**E**) and let canopy (**D**) slip down chain (**F**) carefully.

ASSEMBLY INSTRUCTIONS

Clarice Large Chandelier

Item # JN 5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

20. Twist all fixture wires together. Slip through center hole of collar loop (C).

NOTE: Untwist wires and separate to prepare for connection.

21. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 5). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (Y).

NOTE: It is imperative that the fixture is grounded.

22. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (Y).

23. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (Y).

CAUTION: Do not reverse the hot and neutral connections.

24. Make sure all wire connections are tight, then carefully tuck into the junction box.

25. Install canopy (D) to collar loop (C) by securing with collar ring (E).

26. Install light bulbs into the sockets.

27. Clip shades (Q) onto the bulbs.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.

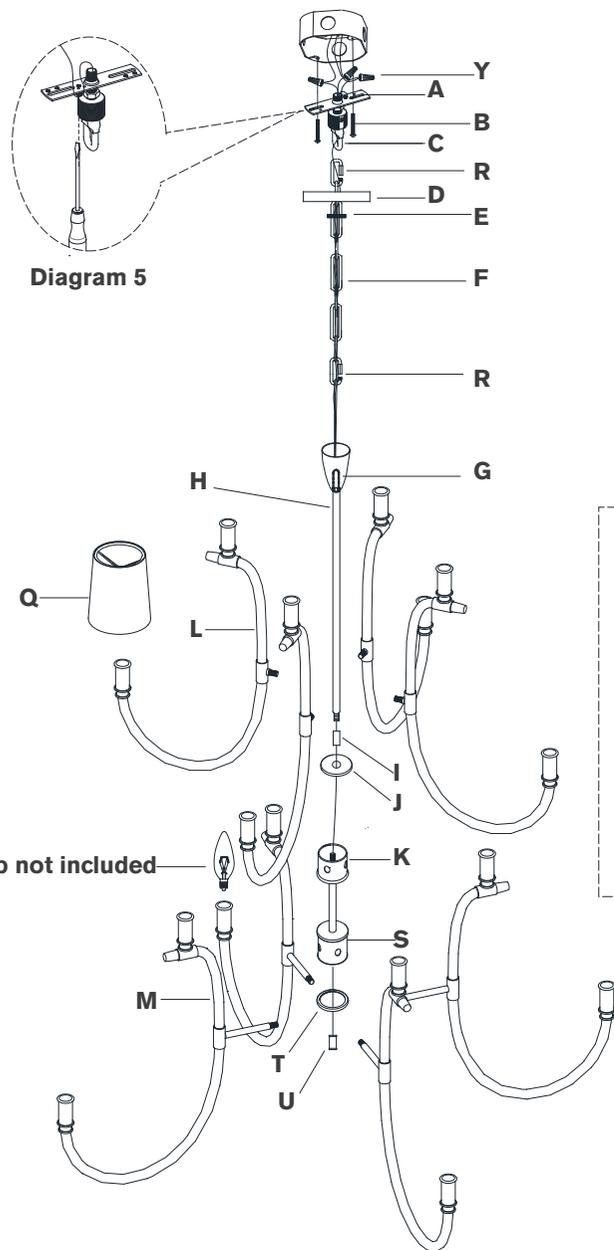


Diagram 5

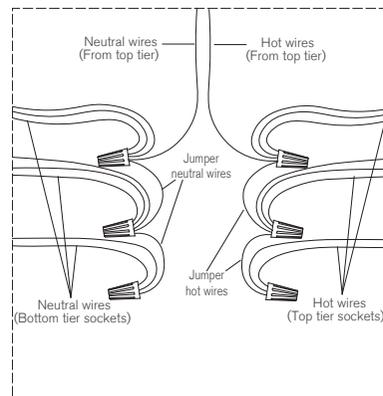


Diagram 4

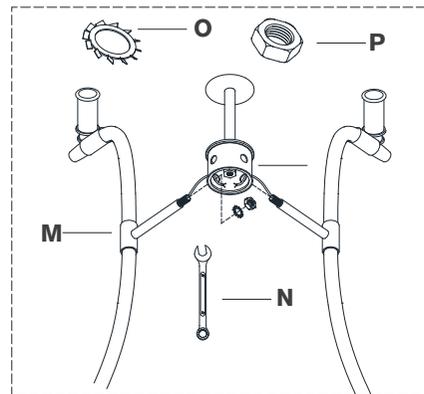


Diagram 3