


ASSEMBLY INSTRUCTIONS

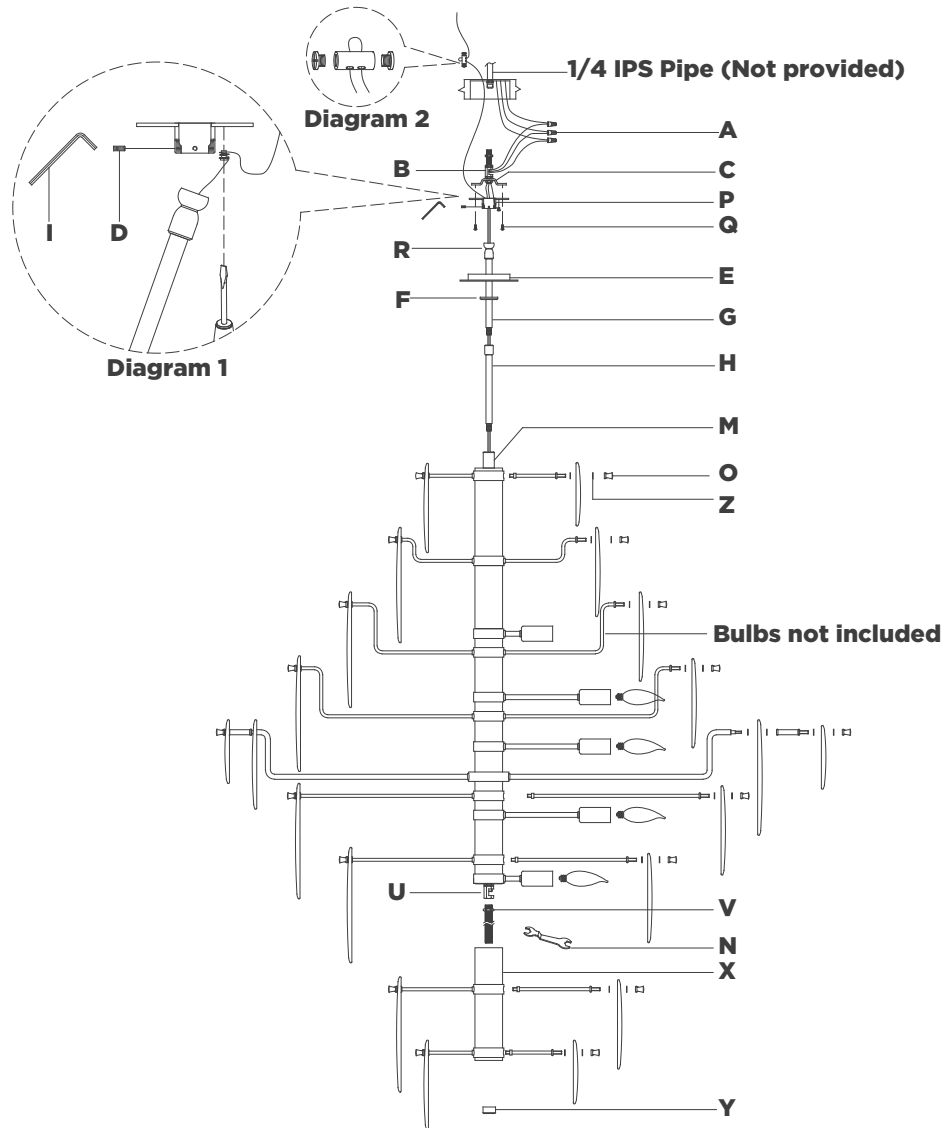

Loire 44" Grande Entry Chandelier

Item # ARN5456

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Wire Cutters
Wire Strippers

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate **(P)** from canopy **(E)** by removing collar ring **(F)**.
- Remove mounting bracket **(C)** from mounting plate **(P)** by removing screws **(Q)**.
- Remove hickey **(B)** from mounting bracket **(P)** by removing hex nut.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install hickey **(B)** into threaded pipe and tighten with wrench.
NOTE: Item must be supported independent of the junction box due to hanging weight.
- Install threaded nipple to hickey **(B)**, then install mounting bracket **(C)** to threaded nipple by tightening locknut.
- Install mounting plate **(P)** to mounting bracket **(C)** and secure with screws **(Q)**.
- Thread pipe **(V)** to hickey **(U)** using provided wrench **(N)**, then install fixture bottom **(X)** and secure with end cap **(Y)**.
- Feed electrical wire, ground wire and safety cable through bottom rod **(H)** and connect to coupling **(M)**.

ASSEMBLY INSTRUCTIONS

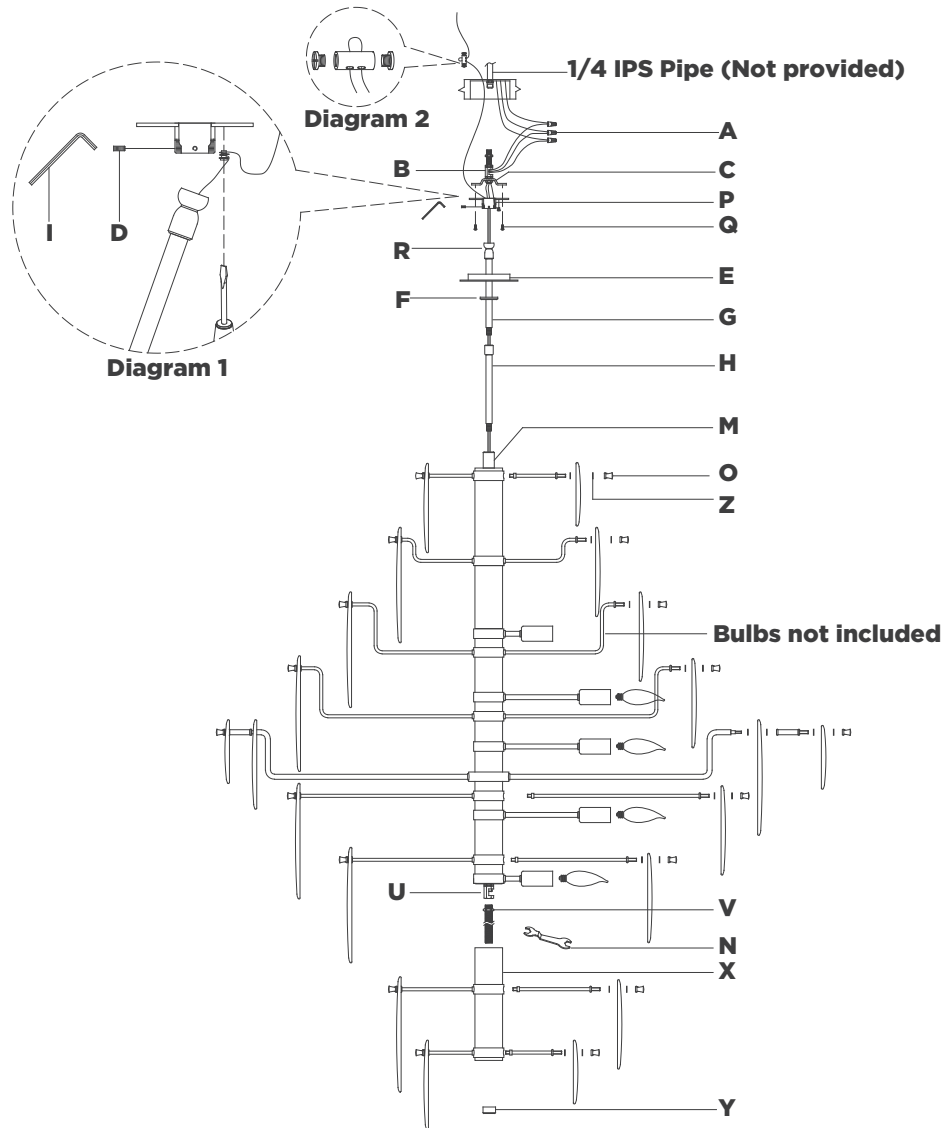

Loire 44" Grande Entry Chandelier


Item # ARN5456

NOTICE:



This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Feed wires through collar ring (F), canopy (E) and top rod (G).
11. Holding fixture upright, slide collar ring (F), canopy (E) down bottom rod (H) and rest on fixture. Then connect top rod (G) to rod (H).
NOTE: Slide components down slowly to avoid damage.
12. Hang fixture swivel ball (R) to center of mounting plate (P) and secure with set screw (D) using the provided wrench (I) (See diagram 1).
13. Cut excess wires, being sure to leave enough to reach the junction box. Separate wires, and strip insulation on each 5/8".
14. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (See diagram 2).
15. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).
NOTE: It is imperative that the fixture is grounded.
16. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (A).



ASSEMBLY INSTRUCTIONS

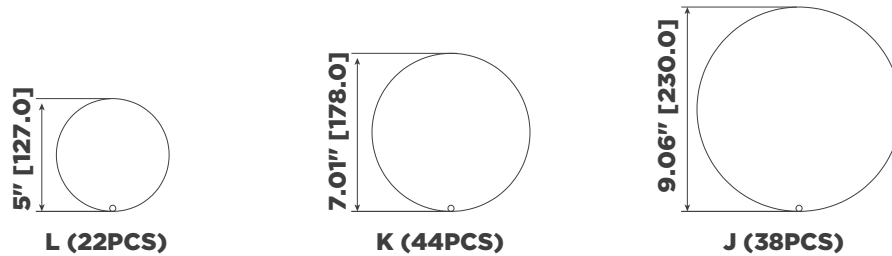

Tier 1 - Bottom

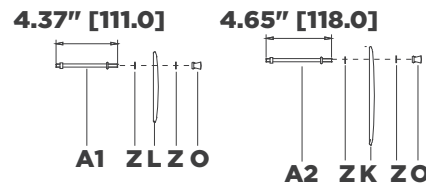

Tier 2

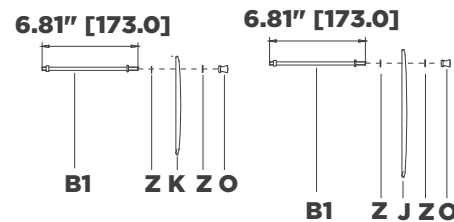

Loire 44" Grande Entry Chandelier

Item # ARN5456

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
- CAUTION:** Do not reverse the hot and neutral connections.
- Make sure all wire connections are tight, then carefully tuck into the junction box.
- Install light bulbs into the sockets.
- Temporarily restore power to test fixture before proceeding to glass assembly.
- Assemble glass disks starting from the bottom as shown in diagram.

Metal Rod & Glass Assembly:

(Reference tier Diagrams for steps 1-17 below)

Tier 1


- Thread metal rods **(A1 & A2)** to center hub of fixture body.
 - Remove finials **(O)** from metal rods **(A1)**, then attach glass **(L)** and secure with rubber washers **(Z)** and finials **(O)**.
 - Remove finials **(O)** from metal rods **(A2)**, then attach glass **(K)** and secure with rubber washers **(Z)** and finials **(O)**.
- NOTE:** Alternate metal rods & glass discs as shown in tier 1 diagram.

Tier 2


NOTE: Reference orientation of Tier 1 to find starting point for metal rods.

ASSEMBLY INSTRUCTIONS

Tier 3

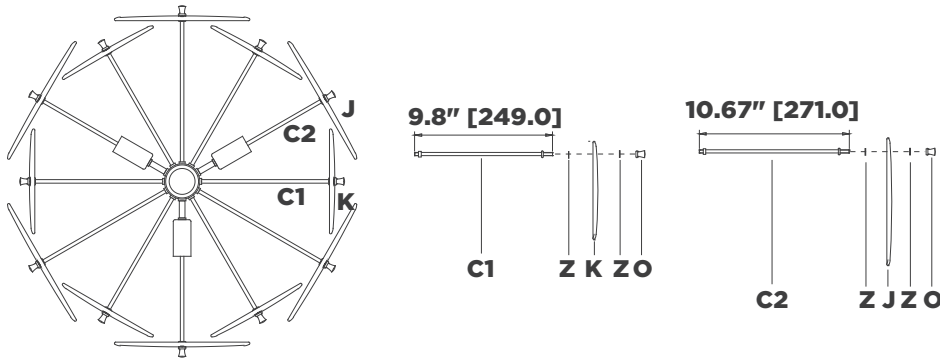

Tier 4

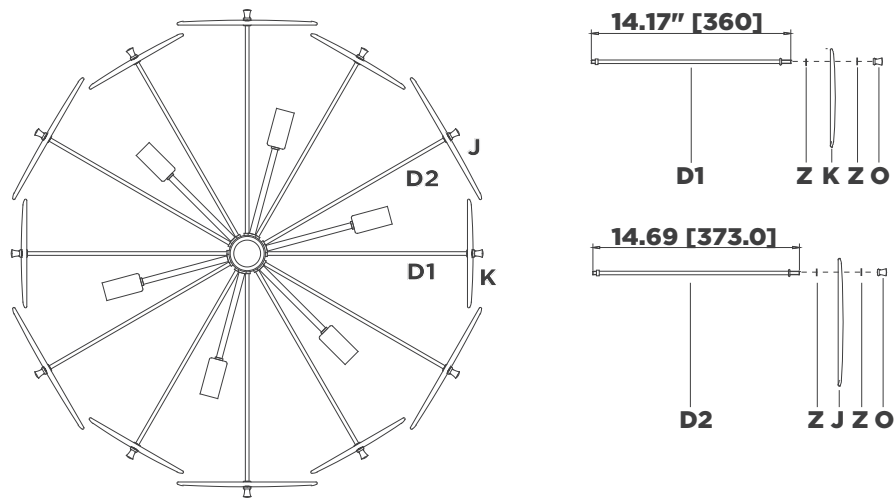

Loire 44" Grande Entry Chandelier

Item # ARN5456

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Tier 2 Continued

4. Thread metal rods (**B1**) to center hub of fixture body.
5. Remove finials (**O**) from metal rods (**B1**), then attach glass (**K & J**) and secure with rubber washers (**Z**) and finials (**O**).

NOTE: Alternate metal rods & glass discs as shown in tier 2 diagram.

Tier 3

NOTE: Reference orientation of Tier 2 to find starting point for metal rods, then alternate as shown.

6. Thread metal rods (**C1 & C2**) to center hub of fixture body.
7. Remove finials (**O**) from metal rods (**C1**), then attach glass (**K**) and secure with rubber washers (**Z**) and finials (**O**).
8. Remove finials (**O**) from metal rods (**C2**), then attach glass (**J**) and secure with rubber washers (**Z**) and finials (**O**).

NOTE: Alternate metal rods & glass discs as shown in tier 4 diagram.



Tier 4

NOTE: Reference orientation of Tier 3 to find starting point for metal rods.



9. Thread metal rods (**D1 & D2**) to center hub of fixture body.
10. Remove finials (**O**) from metal rods (**D1**), then attach glass (**K**) and secure with rubber washers (**Z**) and finials (**O**).

ASSEMBLY INSTRUCTIONS

Tier 5

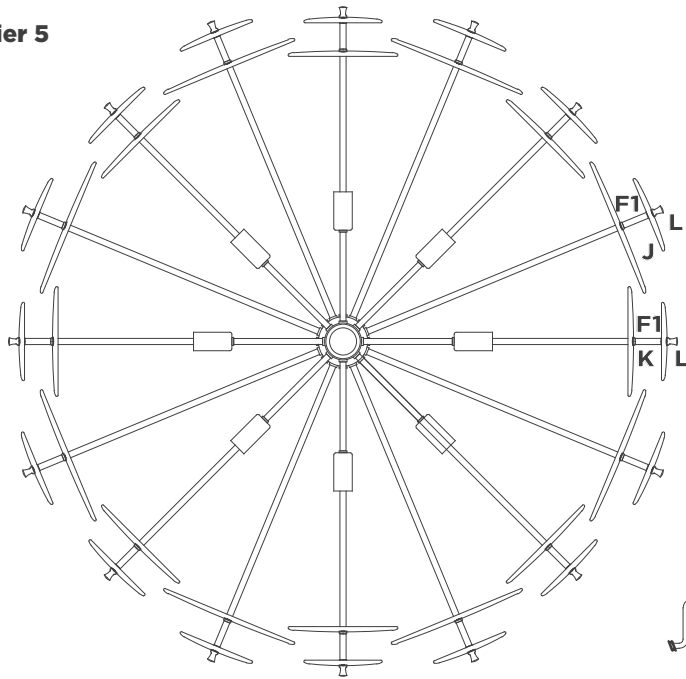

Tier 6

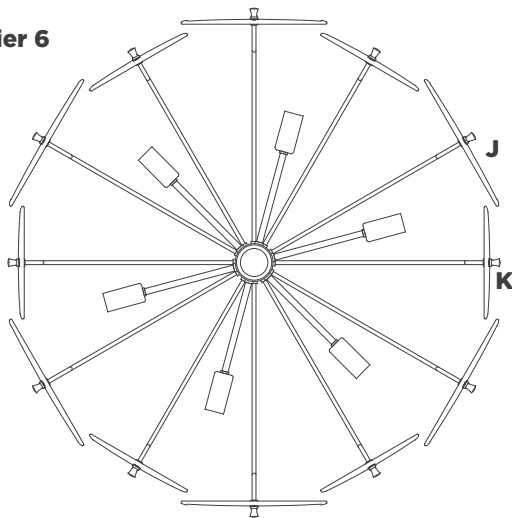

Loire 44" Grande Entry Chandelier

Item # ARN5456

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Tier 4 Continued

11. Remove finials (O) from metal rods (D2), then attach glass (J) and secure with rubber washers (Z) and finials (O).
NOTE: Alternate metal rods & glass discs as shown in tier 4 diagram.

Tier 5

NOTE: Reference orientation of Tier 4 to find starting point for metal rods & glass.

12. Remove metal rods (F1) from metal rods, then attach glass (J & K) and secure with rubber washers (Z) and metal rods (F1).
13. Remove finials (O) from metal rods (F1), then attach glass (L) and secure with rubber washer (Z) and finials (O).

Tier 6 & 7 & 8

NOTE: Reference orientation of Tier 5 & 6 & 7 to find starting point for glass.

14. Remove finials (O) from metal rods then attach glass (J & K) and secure with rubber washers (Z) and finials (P).

Tier 9

NOTE: Reference orientation of Tier 8 to find starting point for metal rods.

15. Thread metal rods (A1 & A2) to center hub of fixture body.

ASSEMBLY INSTRUCTIONS


Loire 44" Grande Entry Chandelier

Item # ARN5456


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Tier 7

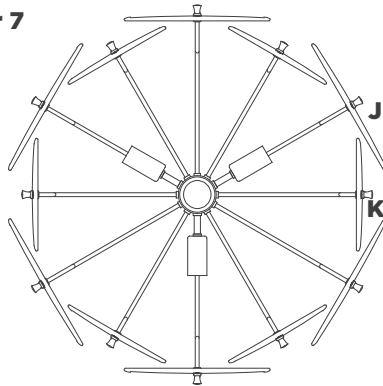

Tier 8




Tier 9 Continued

16. Remove finials **(P)** from metal rods **(A1)**, then attach glass **(L)** and secure with rubber washers **(Z)** and finials **(P)**.
17. Remove finials **(P)** from metal rods **(A2)**, then attach glass **(K)** and secure with rubber washers **(Z)** and finials **(P)**.


NOTE: Alternate metal rods & glass discs as shown in tier 9 diagram.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

Tier 9 - Top



4.37" [111.0]



4.65" [118.0]

