

## ASSEMBLY INSTRUCTIONS

## Mitchell Tail Sconce

Item # RL2590

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- Carefully remove all parts from the carton.
- Remove mounting plate (A) from base of light fixture (D) by removing set screws (E)
- Affix mounting plate (A) to wall outlet box with mounting screws (B) provided.
- Attach fixture base (D) to wall outlet, mark outer line for base (M), make sure both base (M) and (D) are vertical to each other.
- Remove plate (J) from base (M) by unscrewing set screws (L) using Allen wrench (C).
- Place plate (J) to the marked area, mark a hole position on the wall. Remove plate (J). (please refer to Fig. 2)  
Note: Refer to the image for the dimension.
- Drill a small hole on the marked location, make sure the hole should be big enough to accommodate plastic anchor (I). Push the plastic anchor (I) into the holes in the wall.  
Note: Refer to the image for the size of plastic anchor (I), the hole should be smaller than the plastic anchor (I).
- Attach plate (J) to the wall by align the hole and insert wood screw (K) into plastic anchor (I) to secure it on the wall.
- Attach ground (green or green/yellow) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. So the end of the connector is sealed.  
IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

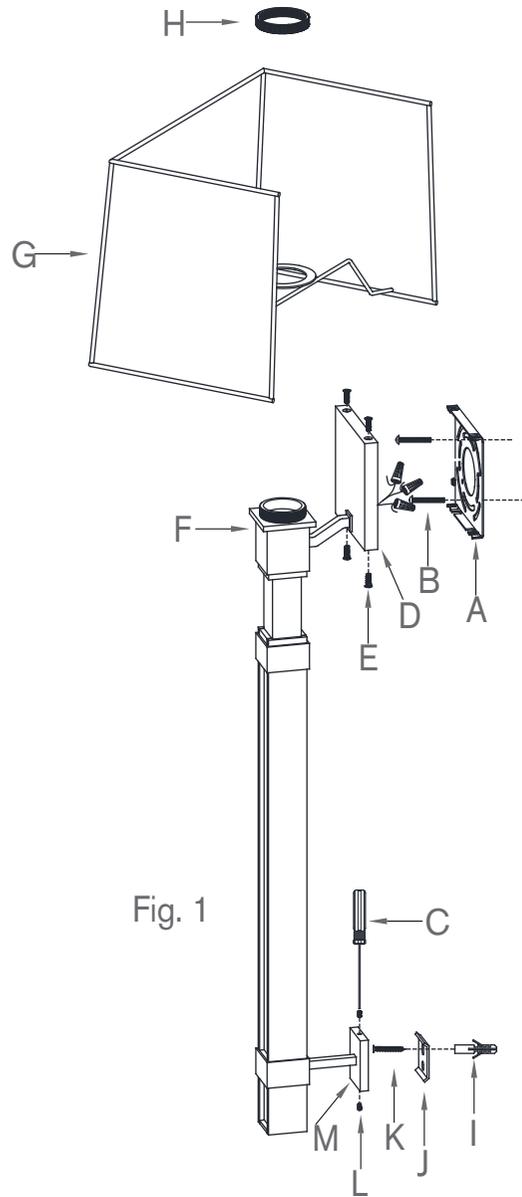


Fig. 1



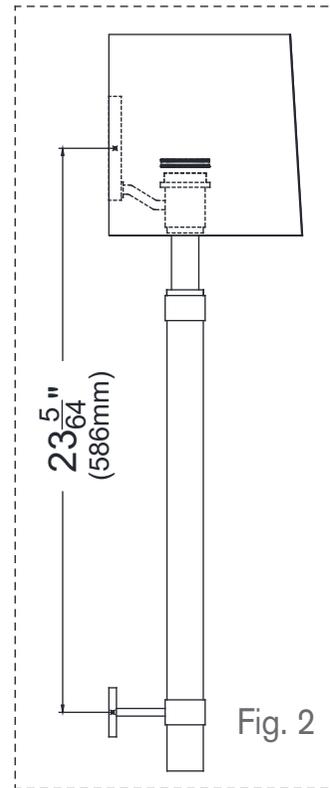


Fig. 2



RALPH LAUREN

## ASSEMBLY INSTRUCTIONS

### Mitchell Tail Sconce


Item # RL2590

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Connect neutral (white ) fixture wire coming from fixture base to neutral (usually white ) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
11. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors.  
**DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
12. Attach fixture base (D) to the mounting plate (A) and secure with set screws (E); attach base (M) to plate (J) and secure with set screw (L). Tighten with Allen wrench (C).
13. Remove socket ring (H) from socket (F), attach shade (G) onto the socket (F) and secure with socket ring (H).
14. Insert light bulb (not included) into the socket.
15. Restore power and test fixture. Installation is complete.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

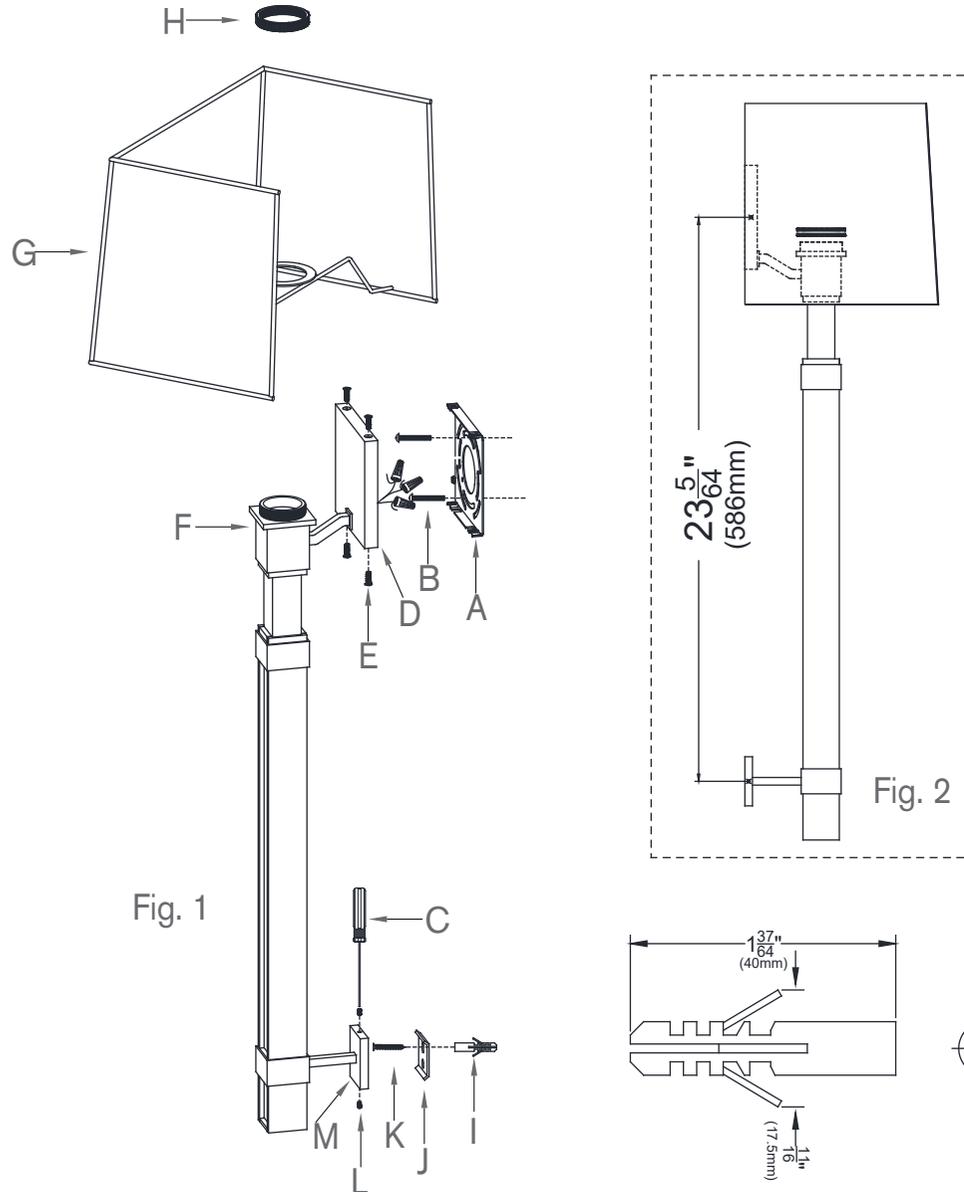

# RALPH LAUREN