

RALPH LAUREN

Daniela 24-Light Chandelier

Item # RL 5010

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


- 1. Carefully remove all parts from the box.
- 2. A 1/4" threaded nipple must be installed in your outlet box. Then install the threaded nipple (B) into the outlet box.
- 3. With the fixture dimension as a guide, shorten the chain (G) as needed using a pair of chain pliers.
- 4. Unscrew the threaded collar on the chain end link (D) and attach it to the ceiling loop (C). Close the threaded collar to secure.
- 5. Attach the canopy (E) to the ceiling loop (C) and secure with lock collar (F).
- Unscrew the threaded collar on the other chain end link (H),raise fixture body and attach chain end link to the top ring (I).Close the threaded collar to secure the fixture body.
- 7. Gently set the wire arm (J & K) to the center plate (L) and secure using the spring washer & lock nut. Check that the arms are spaced evenly before final tightening.
- 8. Connect the hot wire (smooth edge,markings) from the arms to the jumper hot wire (smooth edge,markings) and main hot wire (smooth edge,markings) from the center plate (L) using wire nut (N).
- 9. Connect the neutral wire (ribbed,no markings) from the arms to the jumper neutral wire (ribbed,no markings) and main neutral wire (ribbed, no markings) from the center plate (L) using wire nut (N).
- 10. Wrap all connections individually with electrical tape. Double check that all of your connections are correct.
- 11. Attach the metal bowl (O) to the center plate (L) and secure with threaded washer (P).









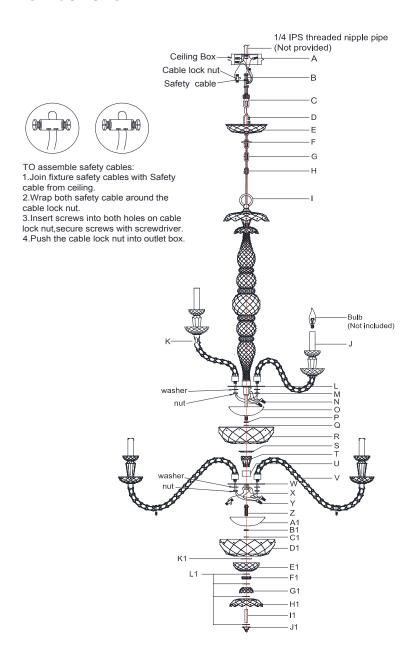

RALPH LAUREN

Daniela 24-Light Chandelier

Item # RL 5010

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


- 12. Attach plastic washer (Q) & crystal bowl (R) & crystal (S) & crystal (T) go through the threaded nipple (M) and secure with connector (U).
- 13. Attach the plate (W) to the threaded nipple (M) and secure with hickey (X).
- 14. Gently set the wire arm (V) to the center plate (W) and secure using the spring washer & lock nut. Check that the arms are spaced evenly before final tightening.
- 15. Connect the hot wire (smooth edge,markings) from the arms to the jumper hot wire (smooth edge,markings) from the center plate (W) using wire nut (Y).
- 16. Connect the neutral wire (ribbed,no markings) from the arms to the jumper neutral wire (ribbed,no markings) from the center plate (W) using wire nut (Y).
- 17. Wrap all connections individually with electrical tape. Double check that all of your connections are correct.
- 18. Thread the nipple (Z) to the hickey (X), then attach the metal bowl (A1) to the plate (W) and secure with threaded washer (B1).
- 19. Let plastic washer (C1) & crystal bowl (D1) & plastic washer (K1) & crystal (E1) & plastic washer (L1) & crystal (F1, G1, H1) & tube (I1) go through the nipple (Z), then secure with finial (J1).
- 20. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (G).
- 21. When you reach the canopy and ceiling loop, measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
- 22. Strip the insulation back on the two power supply wires about 5/8".
- 23. Twist the power supply and ground wire together and push through the center hole of the ceiling loop (C).









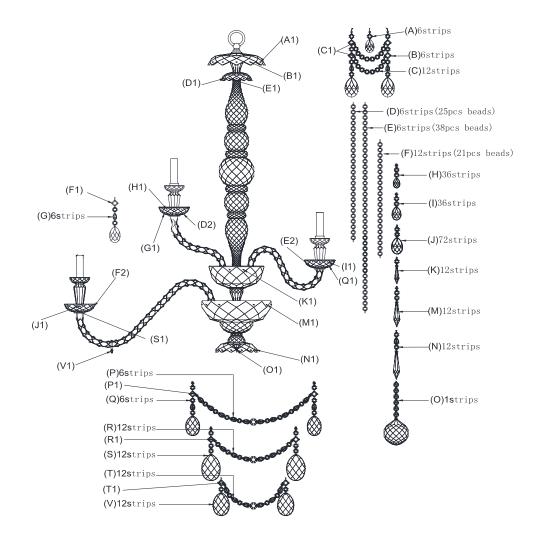

Daniela 24-Light Chandelier

Item # RL 5010

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 24. Loosen the lock collar (F) and let the canopy (E) slip down the chain carefully.
- 25. Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 26. Connect the fixture Neutral (ribbed,no markings) wire with the neutral wire from the outlet box using wire nut (A).
- 27. Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet box using wire nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 28. Tuck these wire connections neatly into the outlet box to secure.
- 29. Put canopy (E) to the ceiling loop (C) and secure with lock collar (F).
- 30. Insert bulbs (not included) into the sockets.
- 31. Attach the crystal drops (A) on hook (A1).
- 32. Attach the crystal drops (B) on hook (B1).
- 33. Attach the crystal drops (C) on hook (C1).
- 34. Attach the crystal drops (D) on hook (D1) & (D2).
- 35. Attach the crystal drops (E) on hook (E1) & (E2).
- 36. Attach the crystal drops (G) on hook (G1).
- 37. Attach the crystal drops (F) on hook (F1) & (F2).
- 38. Attach the crystal drops (H) on hook (H1).
- 39. Attach the crystal drops (I) on hook (I1).












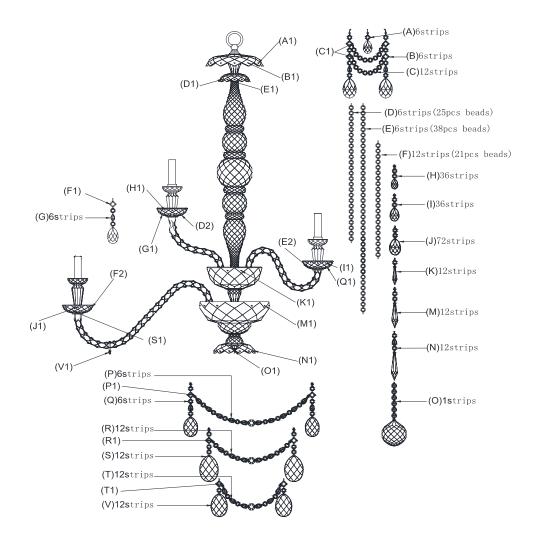

Daniela 24-Light Chandelier

Item # RL 5010

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 40. Attach the crystal drops (J) on hook (J1).
- 41. Attach the crystal drops (K) on hook (K1).
- 42. Attach the crystal drops (M) on hook (M1).
- 43. Attach the crystal drops (N) on hook (N1).
- 44. Attach the crystal drop (O) on hook (O1).
- 45. Attach the crystal drops (Q) on hook (Q1).
- 46. Attach the crystal drops (P) on hook (P1).
- 47. Attach the crystal drops (S) on hook (S1).
- 48. Attach the crystal drops (R) on hook (R1).
- 49. Attach the crystal drops (V) on hook (V1).
- 50. Attach the crystal drops (T) on hook (T1).
- 51. Installation is complete, turn on power at fuse or circuit breaker

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.



