
ASSEMBLY INSTRUCTIONS

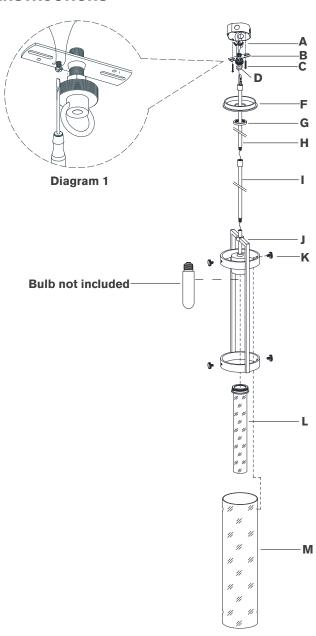

Kears Medium Hanging Lantern

Item # S 5762

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Wire Cutters

Slip Joint Pliers Wire Strippers

- 1. Carefully remove all parts from the box. Place on a clean, soft surface.
- 2. Remove collar ring (G) from collar loop (D).
- 3. Install mounting plate **(B)** to junction box and secure with mounting screws **(C)**.
- 4. Secure collar loop **(D)** to mounting plate **(B)** using pliers to tighten lock nut.
- 5. Feed fixture wires through bottom rod (I) and connect to fixture body (J).
- 6. Continue feeding fixture wires through collar ring **(G)**, canopy **(F)** and top rod **(H)**.
- 7. Holding fixture upright, slide collar ring **(G)** and canopy **(F)** down rods and rest on fixture body **(J)**. Then connect top rod **(H)** to bottom rod **(I)**.

NOTE: Slide components down slowly to avoid damages.

- 8. Hang item to collar loop (D) and secure using quick link.
- 9. Cut excess wires, being sure to leave enough to reach the junction box.
- 10. Separate two sides of molded wire, and strip insulation on each 5/8".
- Twist all fixture wires together. Slip through center hole of collar loop (C).

NOTE: Untwist wires and separate to prepare for connection.












ASSEMBLY INSTRUCTIONS

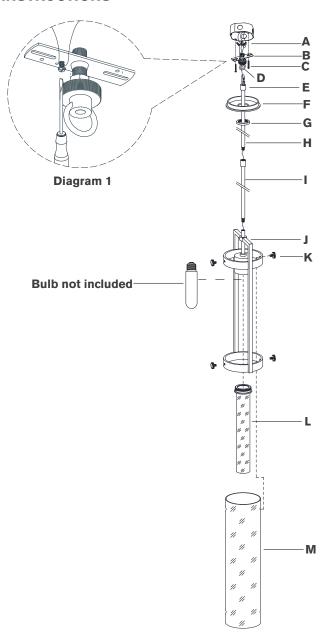

Kears Medium Hanging Lantern

Item # S 5762

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).

NOTE: It is imperative that the fixture is grounded.

- 13. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (A).
- 14. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (A).

CAUTION: Do not reverse the hot and neutral connections.

- 15. Make sure all wire connections are tight, then carefully tuck into the junction box.
- 16. Install canopy (F) to collar loop (D) and secure with collar ring (G).
- 17. Install light bulb into the socket.
- 18. Loosen thumbscrews **(K)**. Thread glass tube **(L)** to shade holder, then install glass shade **(M)** to shade holder and secure with thumbscrews **(K)**.

NOTE: Do not over-tighten otherwise glass could become damaged.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.







