

## ASSEMBLY INSTRUCTIONS

### Formosa 11" Single Pendant


Item # KW5901

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

#### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver      Slotted Screwdriver      Wire Strippers  
Wire Cutters

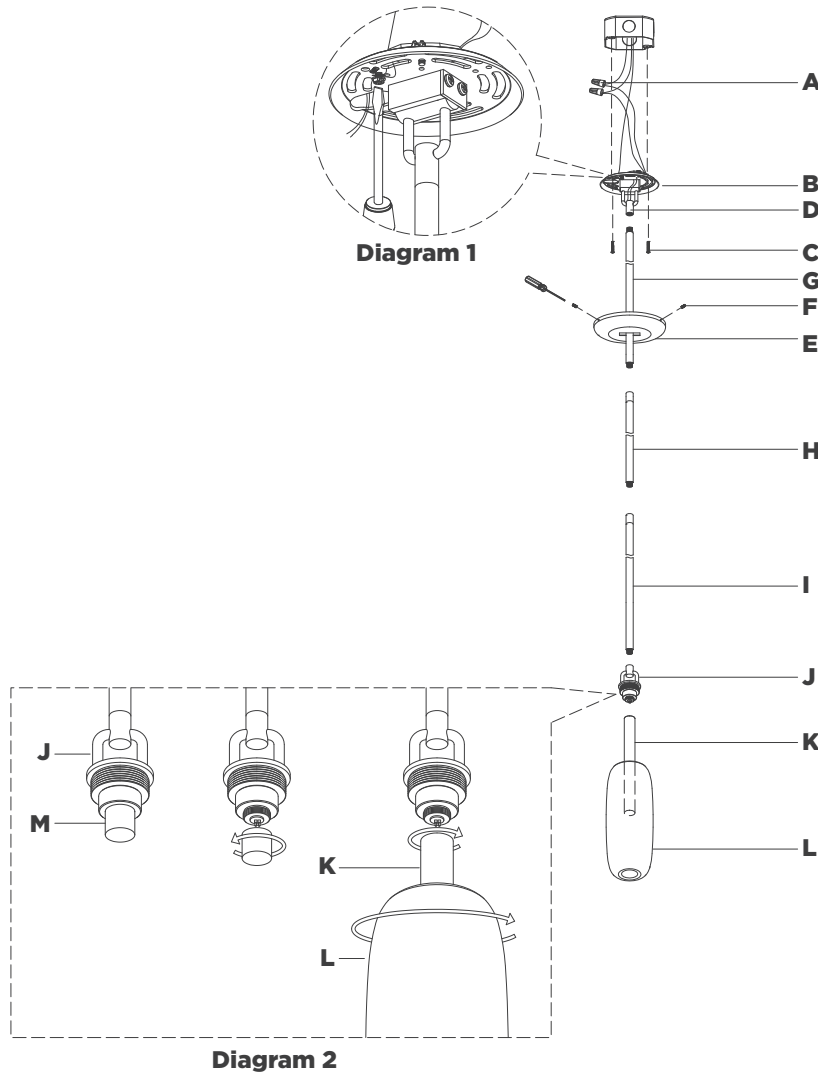

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(E)** by removing screws **(F)**.
3. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
4. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.  
**NOTE:** It is imperative that the fixture is grounded.
5. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
6. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.  
**CAUTION:** Do not reverse the hot and neutral connections.
7. Make sure all wire connections are tight, then carefully tuck into the junction box.
8. Install canopy **(E)** to mounting plate **(B)** and secure with screws **(F)**.
9. Connect bottom rod **(I)** to light source base **(J)**. Repeat for middle rod **(H)**, connecting to bottom rod **(I)**.


## ASSEMBLY INSTRUCTIONS

### Formosa 11" Single Pendant

Item # KW5901

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

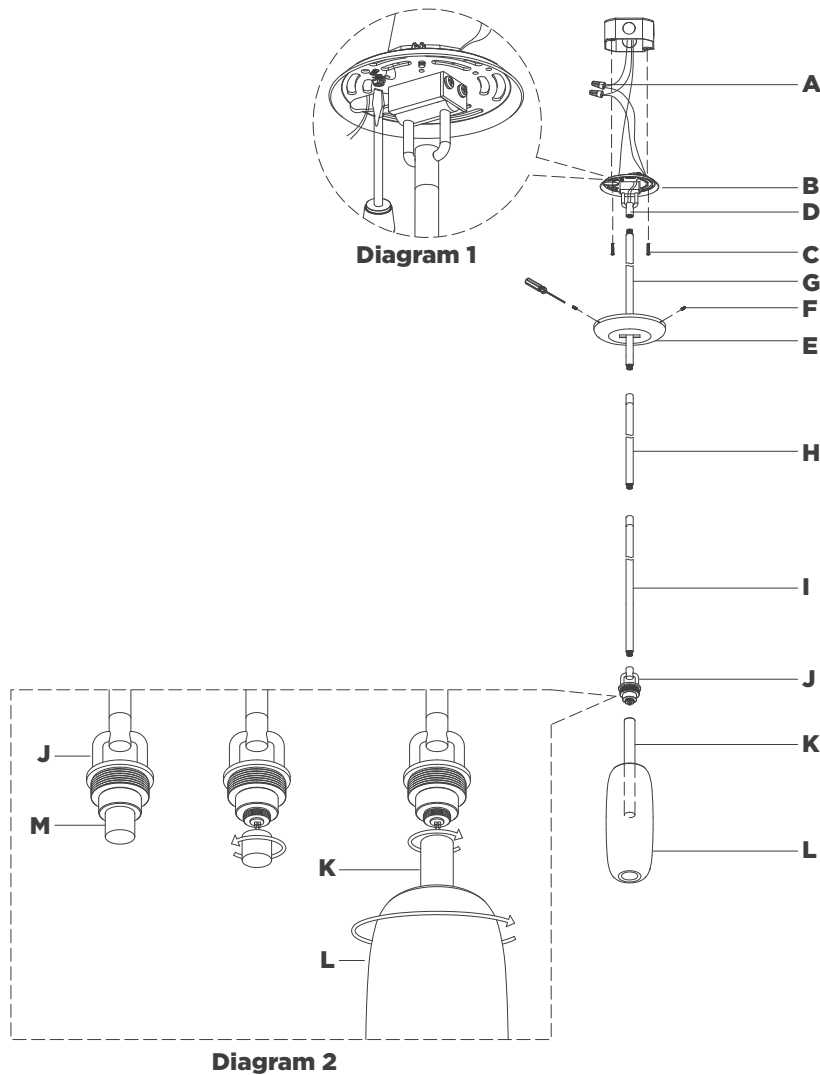

10. Connect top rod **(G)** to middle rod **(H)**, then connect to coupling **(D)**.

11. Remove protective cover **(M)** from light source base **(J)**, then thread light source **(K)** to light source base **(J)** (see diagram 2).

**NOTE:** Discard protective cap **(M)** after assembly.

12. Thread shade **(L)** to light source base **(J)**.

**NOTE:** Do not overtighten otherwise shade could become damaged.

**CARE INSTRUCTIONS:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.