


ASSEMBLY INSTRUCTIONS

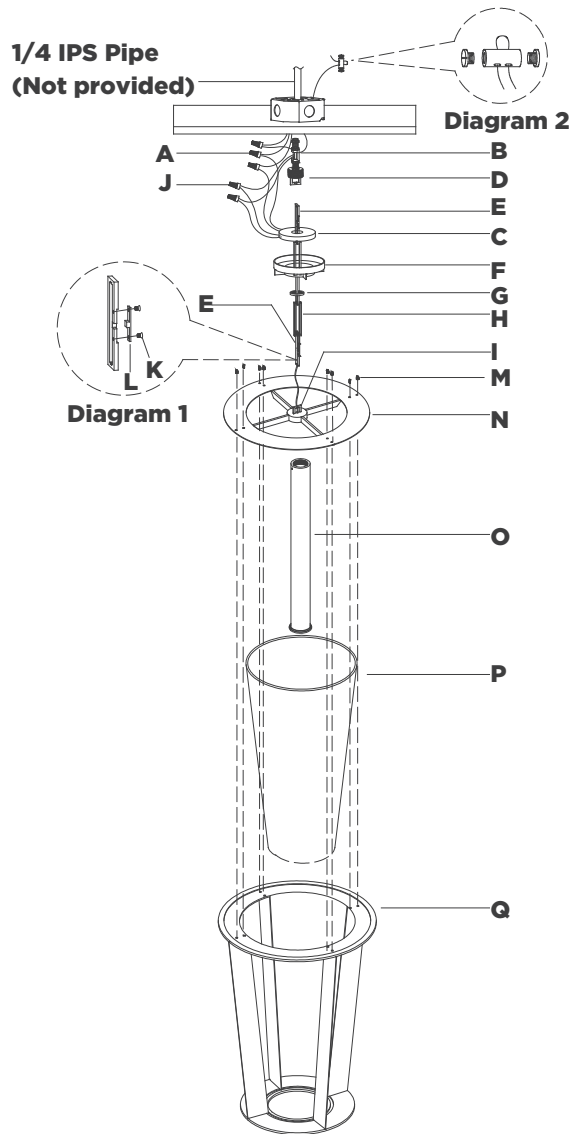

Phinn 18" Lantern

Item # BBL5190

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install threaded nipple **(B)** into receiver and tighten with wrench.
NOTE: Item must be supported independent of the junction box due to hanging weight.
3. Remove lock collar **(D)** from chain **(H)** and secure to threaded receiver attached to structural member by tightening locknut.
4. Install driver **(C)** and canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
5. Thread light source **(O)** to fixture frame **(N)**.
6. Place glass shade **(P)** to metal shade **(Q)**, then install to fixture frame **(N)** and secure with screws **(M)**.
7. Determine desired overall length, and amount of chain **(H)** needed. Shorten chain using chain pliers. (Keep extra chain)
8. Remove metal links **(L)** from quick links **(E)** by removing screws **(K)**, then attach chain **(H)** to collar loop **(D)** and to fixture loop **(I)**. Then secure metal links **(L)** by securing screws **(K)** (see diagram 1).

ASSEMBLY INSTRUCTIONS

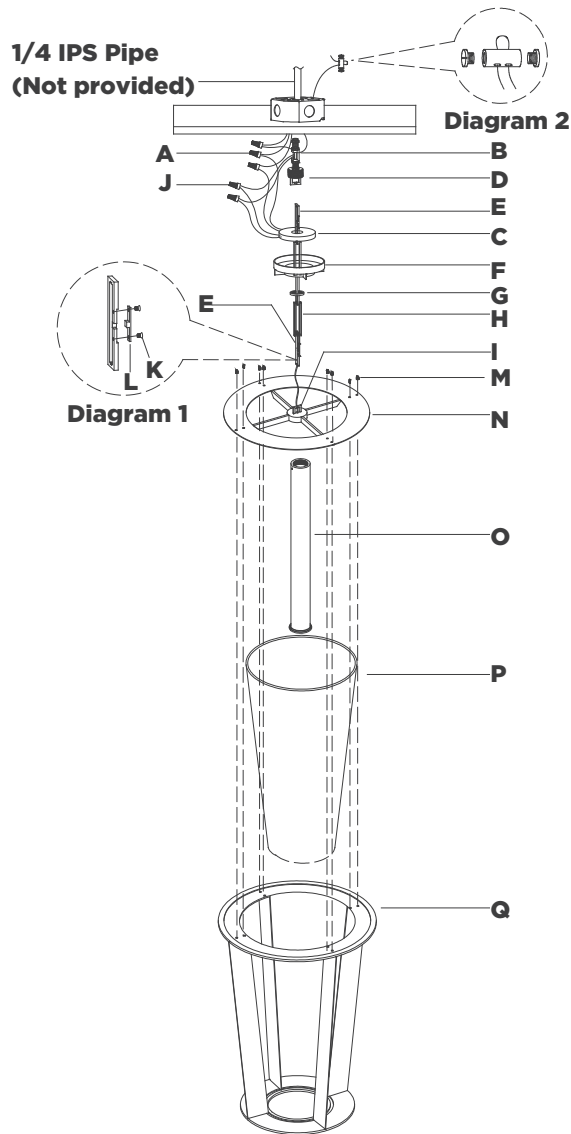

Phinn 18" Lantern


Item # BBL5190

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

9. Thread fixture wire, ground wire and safety cable through chain (H).
NOTE: When you reach the collar loop (D), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box. Do not cut safety cable.
10. Separate two sides of molded wire, and strip insulation on each 5/8".
11. Loosen collar ring (G) and let canopy (F) and driver (C) slip down chain (H) carefully.
12. Twist all fixture wires together, and slip through center hole of collar loop (D).
NOTE: Untwist wires and separate to prepare for connection.
13. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (see diagram 2).
14. Connect fixture neutral wire (ribbed) to driver (C) output wire (black) using wire nut (J).
15. Connect fixture hot wire (smooth with markings) to driver (C) output wire (red) using wire nut (J).

ASSEMBLY INSTRUCTIONS

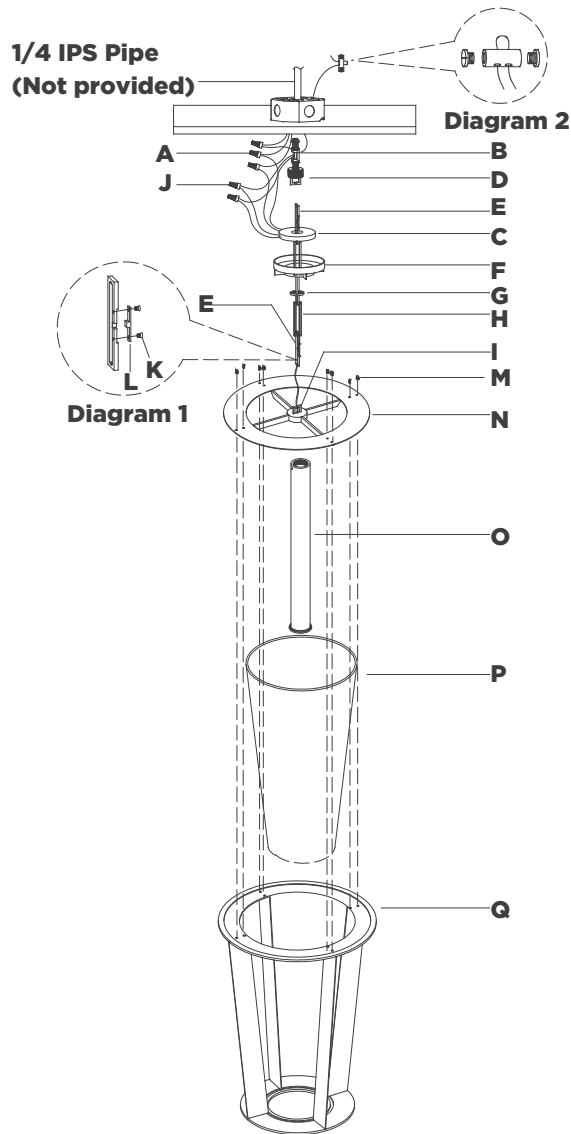

Phinn 18" Lantern

Item # BBL5190

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

16. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut **(A)**.
- NOTE:** It is imperative that the fixture is grounded.
17. Connect driver **(C)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
18. Connect driver **(C)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
- CAUTION:** Do not reverse the hot and neutral
19. Install driver **(C)** and canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.